

985-42508

## 청라국제 도시아이파크

(장애인, 피난용 #13)

(등기구 업체 - 다운텍)

LED BAR - 1300=5(EA)  
LED BAR - 1550=2(EA)  
SMPS (200W)-1(EA)

등기 985

(900 x 1250)

LED BAR - 1550

(6500K-누드&클립&잭타입)

LED BAR-1300 (6500K-누드&클립&잭타입)

262.5 177.5px4=710 262.5

SMPS  
200W

LED BAR - 1550  
(10000K-누드&클립&잭타입)

10/10





\*.현장명 : 대구교도소 대체복무시설 - 1(set)

LED BAR - 1350=2(EA)  
SMPS- (60W)=1(EA)

(등기구업체 - 다운텍)


선길이-1.5M

SMPS  
60 W

AL PROFILE TUBE (마구리포함) - 1446L

LED BAR-(누드&클림&잭타입)

6500K = 1350L

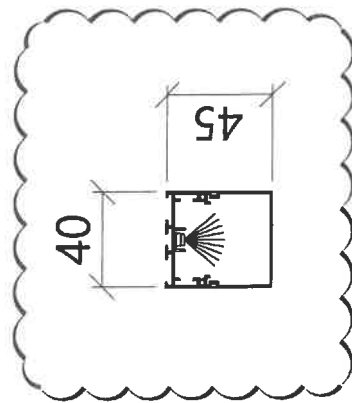

LED BAR-(누드&클림&잭타입)

6500K = 1350L

AL PROFILE TUBE (마구리포함) - 1446L

026-1

(600x1500

50%

10/24

Technical drawing of a lighting fixture assembly. The main drawing shows two LED bar sections, each 600mm long, mounted on a bracket. The total length of the assembly is 1230mm. The mounting bracket has a width of 48mm. A detail view shows the mounting bracket with a width of 40mm and a height of 45mm. The detail view also shows the mounting bracket with a width of 40mm and a height of 45mm. The detail view is labeled '전선 상부로 인출' (Pull out to the top of the cable) and 'Ø20 (전선 인출홀)' (Ø20 (Cable pull hole)).

(좌, 우 마구리 포함) - 1446

LED BAR 고정용 클립 센터거리 - 600

LED BAR 고정용 클립 센터거리 - 600

LED BAR - 6500K - 1350

전선 상부로 인출

Ø20 (전선 인출홀)

Quantity : 2 EA

[illegible]