




*.현장명 : 횡성초등학교 - 1(set)

LED BAR - 1300=2(EA)
SMPS-1(EA)

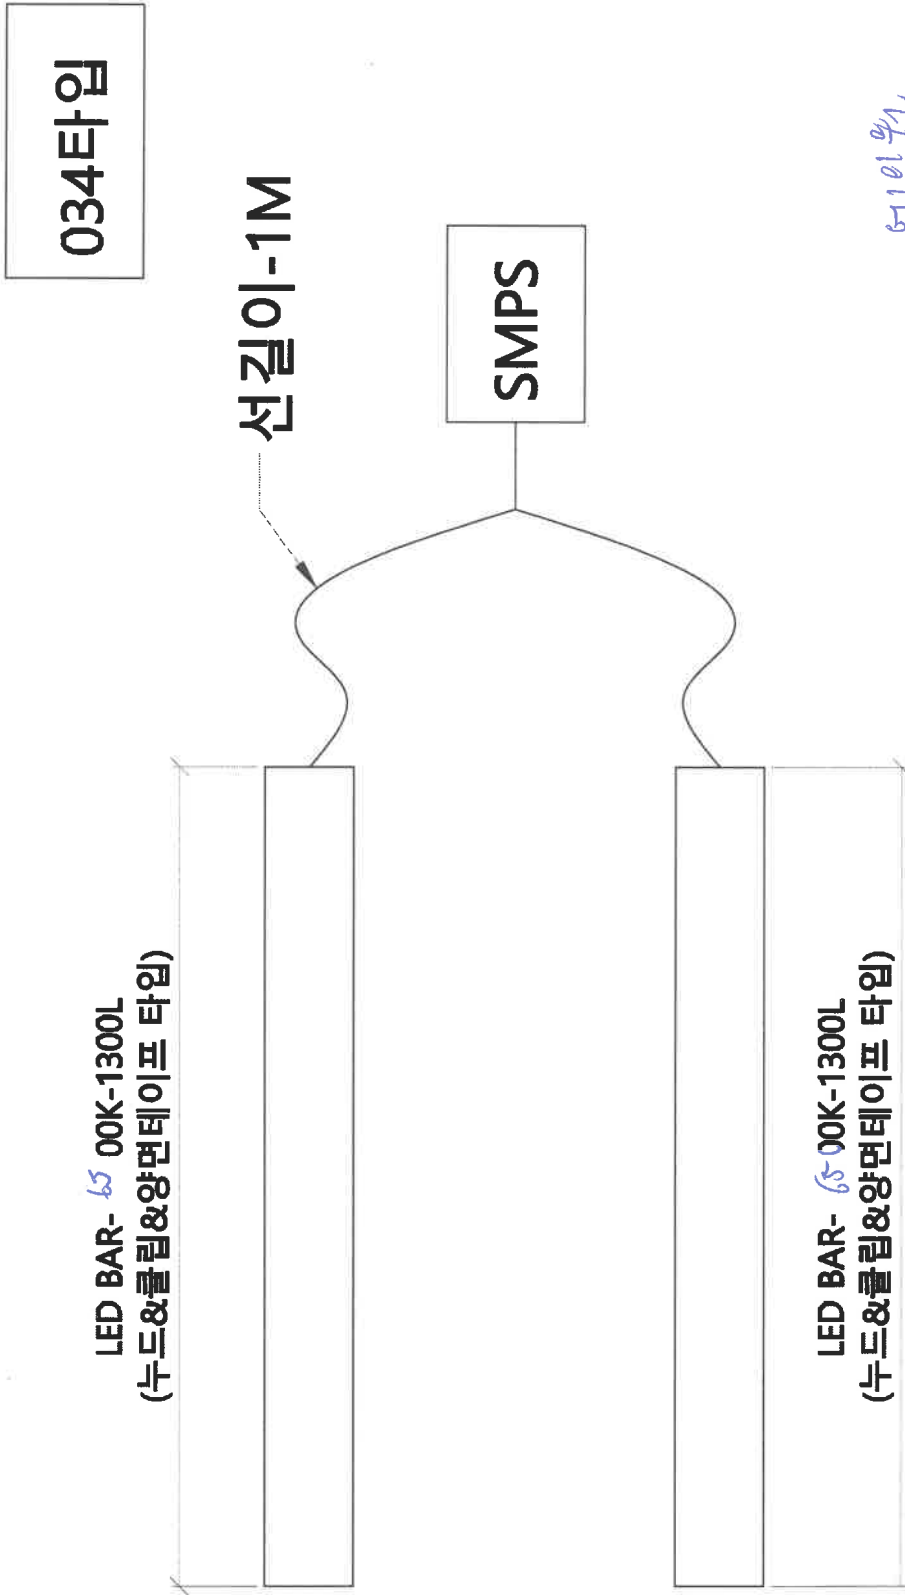


6110192
(600x400)
~

LED BAR - 6500K (누드&플립&양면 테이프타입) - 1300L

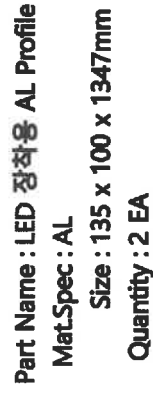

Part Name : 동기구커버
Mat.Spec : PC
Size : 1346 x 62mm
Quantity : 2 EA

[illegible]

*.현장명 : 황성초등학교 - 1(set)

LED BAR - 1300=2(EA)
SMPS-1(EA)

217401

034타입

600 X 1490

선길이-1M

SMPS

LED BAR- 65,00K-1300L

(누드&클립&양면테이프 타입)

LED BAR- 65,00K-1300L

(누드&클립&양면테이프 타입)

LED BAR - 6500K (누드&클립&양면 테이퍼타입) - 1300L

Technical drawing of a mechanical part with dimensions: 135, 67, 33, and 100.

1346

Technical drawing of a mechanical part showing front and side views with dimensions in mm.

Front View Dimensions:

- Overall width: 103,5
- Overall height: 135
- Left side features a vertical section with a width of 15 mm and a total height of 75 mm, divided into a 45 mm section and a 30 mm section.
- Top edge features a horizontal section with a width of 15 mm and a total height of 60 mm, divided into a 45 mm section and a 15 mm section.
- Internal features include a vertical slot with a width of 10,5 mm and a depth of 80 mm, and a horizontal slot with a width of 32 mm and a depth of 13 mm.
- A 6-Ø4 Hole is located on the right side, with a distance of 9,5 mm from the top edge and 32,6 mm from the bottom edge.
- A 2-Ø9 Hole (M6 Pop Nut) is located on the left side, with a distance of 15 mm from the top edge and 15 mm from the bottom edge.


Side View Dimensions:

- Overall width: 105
- Overall height: 30
- Internal features include a vertical slot with a width of 13 mm and a depth of 105 mm, and a horizontal slot with a width of 105 mm and a depth of 13 mm.

A diagram showing a rectangular area. The horizontal dimension is labeled 62 and the vertical dimension is labeled 9,6. The rectangle is defined by dashed lines extending from the center point.

[illegible]

* 현장명 : ~~배터리~~원엘리베이터-신동호 - 1(set)
 18 (등기구업체 : 다운텍)

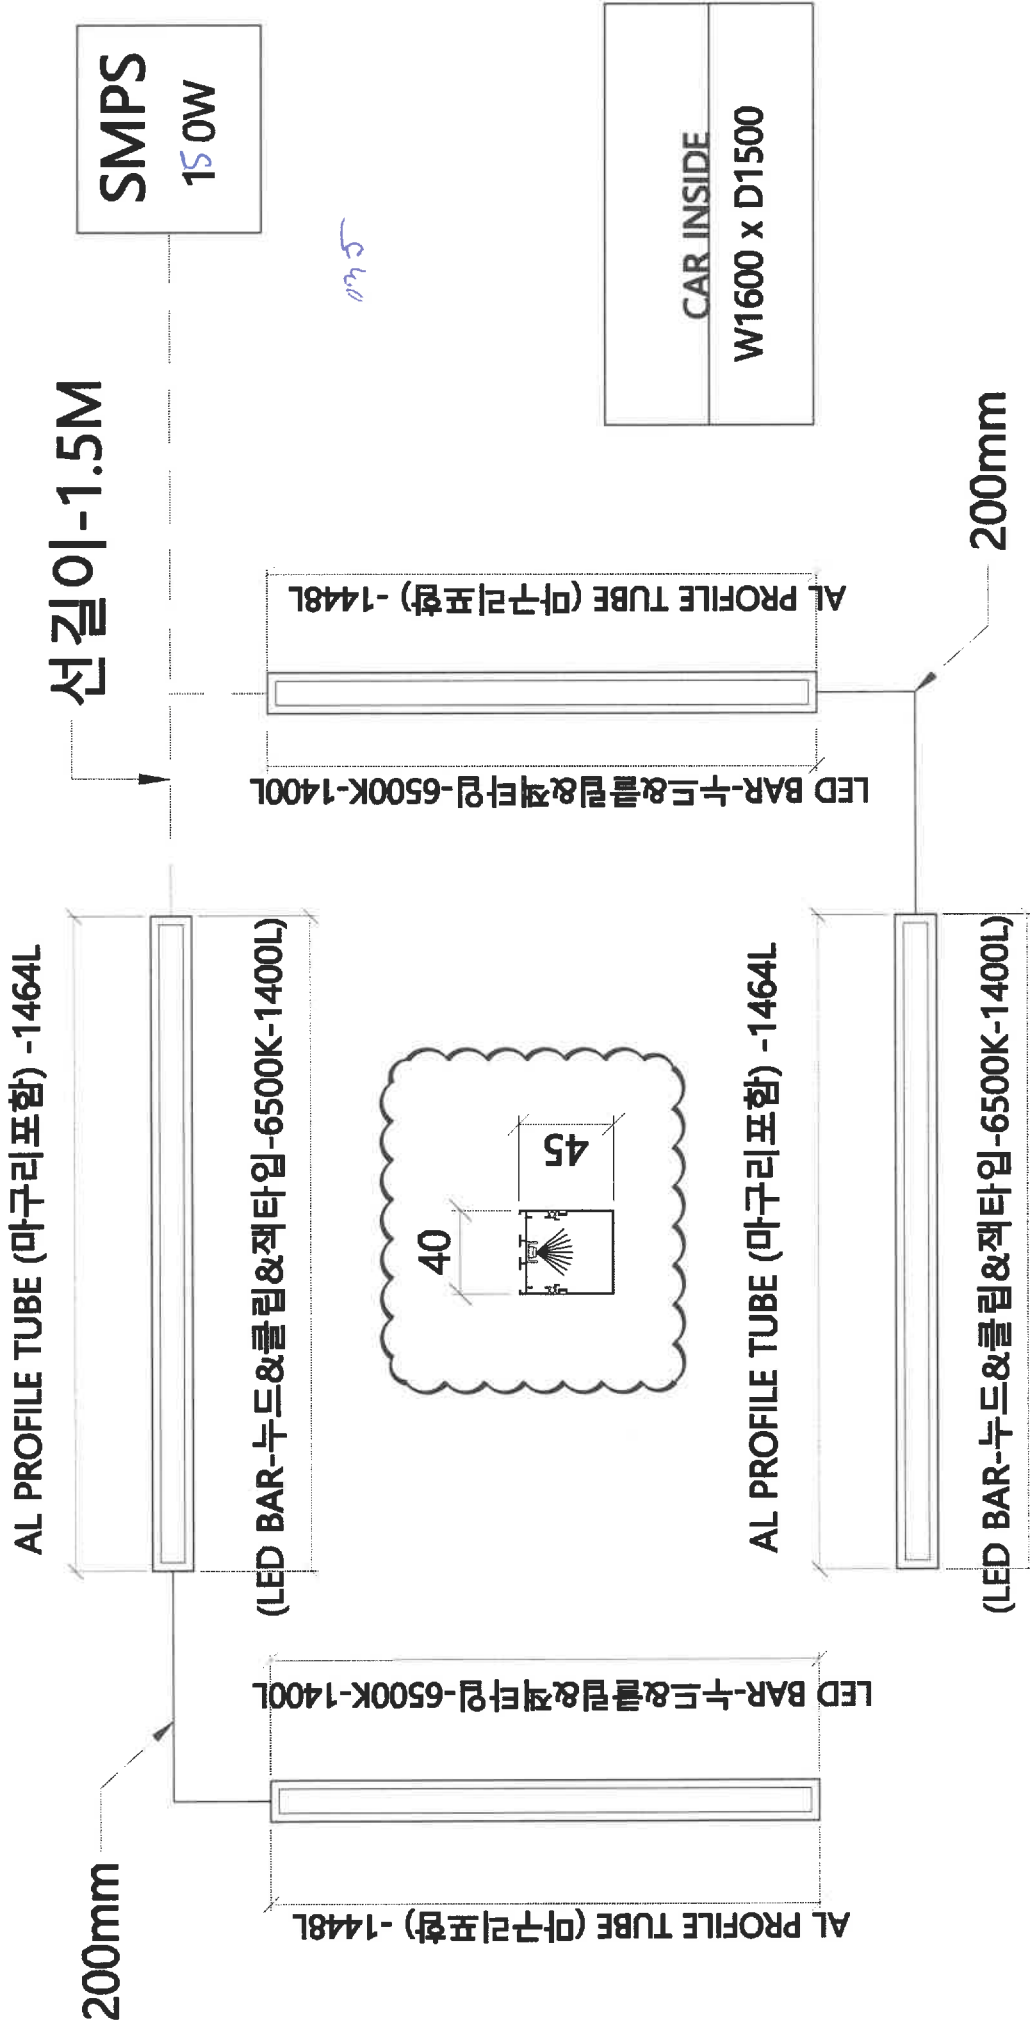

24

224	LED BAR 고정 센터 - 500L	LED BAR 고정 센터 - 500L	224
LED BAR - 6500K (누드&클립&젯타임) = 1400L			

24

Part Name : PROFILE LED BAR(좌,우)
Mat.Spec : AL
Size : SHP 4045 - 1448L
Quantity : 2 EA

232 LED BAR 고정 센터 - 500L LED BAR 고정 센터 - 500L 232

LED BAR - 6500K (누드&클립&좌타입) = 1400L

32

LED BAR - 6500K (누드&클립&잭타입) = 1400L

[illegible]

LED BAR - 1350=2(EA)
SMPS- (60W)=1(EA)

*.현장명 : 포항 흥해읍 농촌중심지활성화 - 1(set)

(등기구업체 - 다운텍)

026-1
271191


1800x1500

선길이-1.5M

SMPS
60 W

AL PROFILE TUBE (마구리포함) - 1446L

LED BAR-(누드&클립&잭타입)
6500K = 1350L

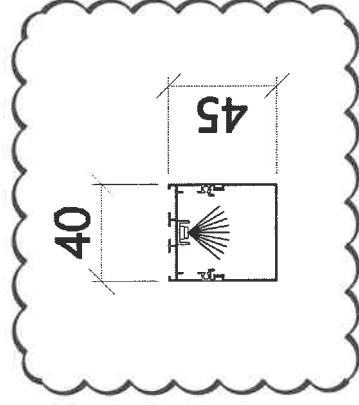

LED BAR-(누드&클립&잭타입)
6500K = 1350L

AL PROFILE TUBE (마구리포함) - 1446L

LED BAR 고정용 플립 센터거리 - 600

LED BAR 고정용 플립 센터거리 - 600

LED BAR - 6500K - 1350

전선 상부포 인출

Ø20 (전선 외경)

Quantity: 2 EA

[illegible]