

# FACT-CABLED-CHASSIS

---

## Base Product



### FACT® Fiber Optic Pre-cabled Chassis for FACT ODF

The building blocks of the FACT® optical distribution frame system are the FACT® chassis. FACT® chassis can be deployed individually as a single-element chassis, or up to six similar elements can be combined into high fiber-count FACT® chassis. The single-element FACT® chassis measures 30.95 mm (1.22 in.) tall, 30 percent less than the standard HU/1RU (44.45 mm/1.75 in.). Each FACT® element features two hinged trays, providing full front access to both sides of all connections and clear visibility of all ports.

The FACT® pre-cabled chassis is supplied with connectorized cables from 24 fibers to 144 fibers, and a stub on the far end. It is available for indoor cable in lengths up to 300 meters. The pre-cabled chassis accommodates 24 SC or 48 single LC connections per FACT® element. All pre-cabled FACT® chassis use EIA/TIA 598 color-coding standard.

The FACT® patch-splice chassis is available in 6 height versions:

- 1E
- 2E
- 3E
- 4E
- 5E
- 6E

## Product Classification

### Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

### Portfolio

CommScope®

# FACT-CABLED-CHASSIS

---

|                |                                                                                                                                      |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Product Type   | Fiber patch chassis, with indoor cable   Fiber patch chassis, with indoor/outdoor cable   Fiber patch chassis, with microsheet cable |
| Product Brand  | FACT®                                                                                                                                |
| Product Series | FACT                                                                                                                                 |

## General Specifications


|                  |                                                                                                |
|------------------|------------------------------------------------------------------------------------------------|
| Functionality    | Patching   Splicing                                                                            |
| Application      | For use with FACT frames   Compatible with FIST-GR3-R frames when backplate is used (optional) |
| Body Style       | Symmetrical                                                                                    |
| Color            | Gray                                                                                           |
| Interface, front | LC/UPC   SC/APC   SC/UPC   LC/APC                                                              |
| Rack Type        | FACT   FIST-GR3                                                                                |
| Shelf Movement   | Sliding                                                                                        |

## Dimensions

|       |                    |
|-------|--------------------|
| Width | 524 mm   20.63 in  |
| Depth | 283 mm   11.142 in |

# FACT-CABLED-CHASSIS

## Ordering Tree

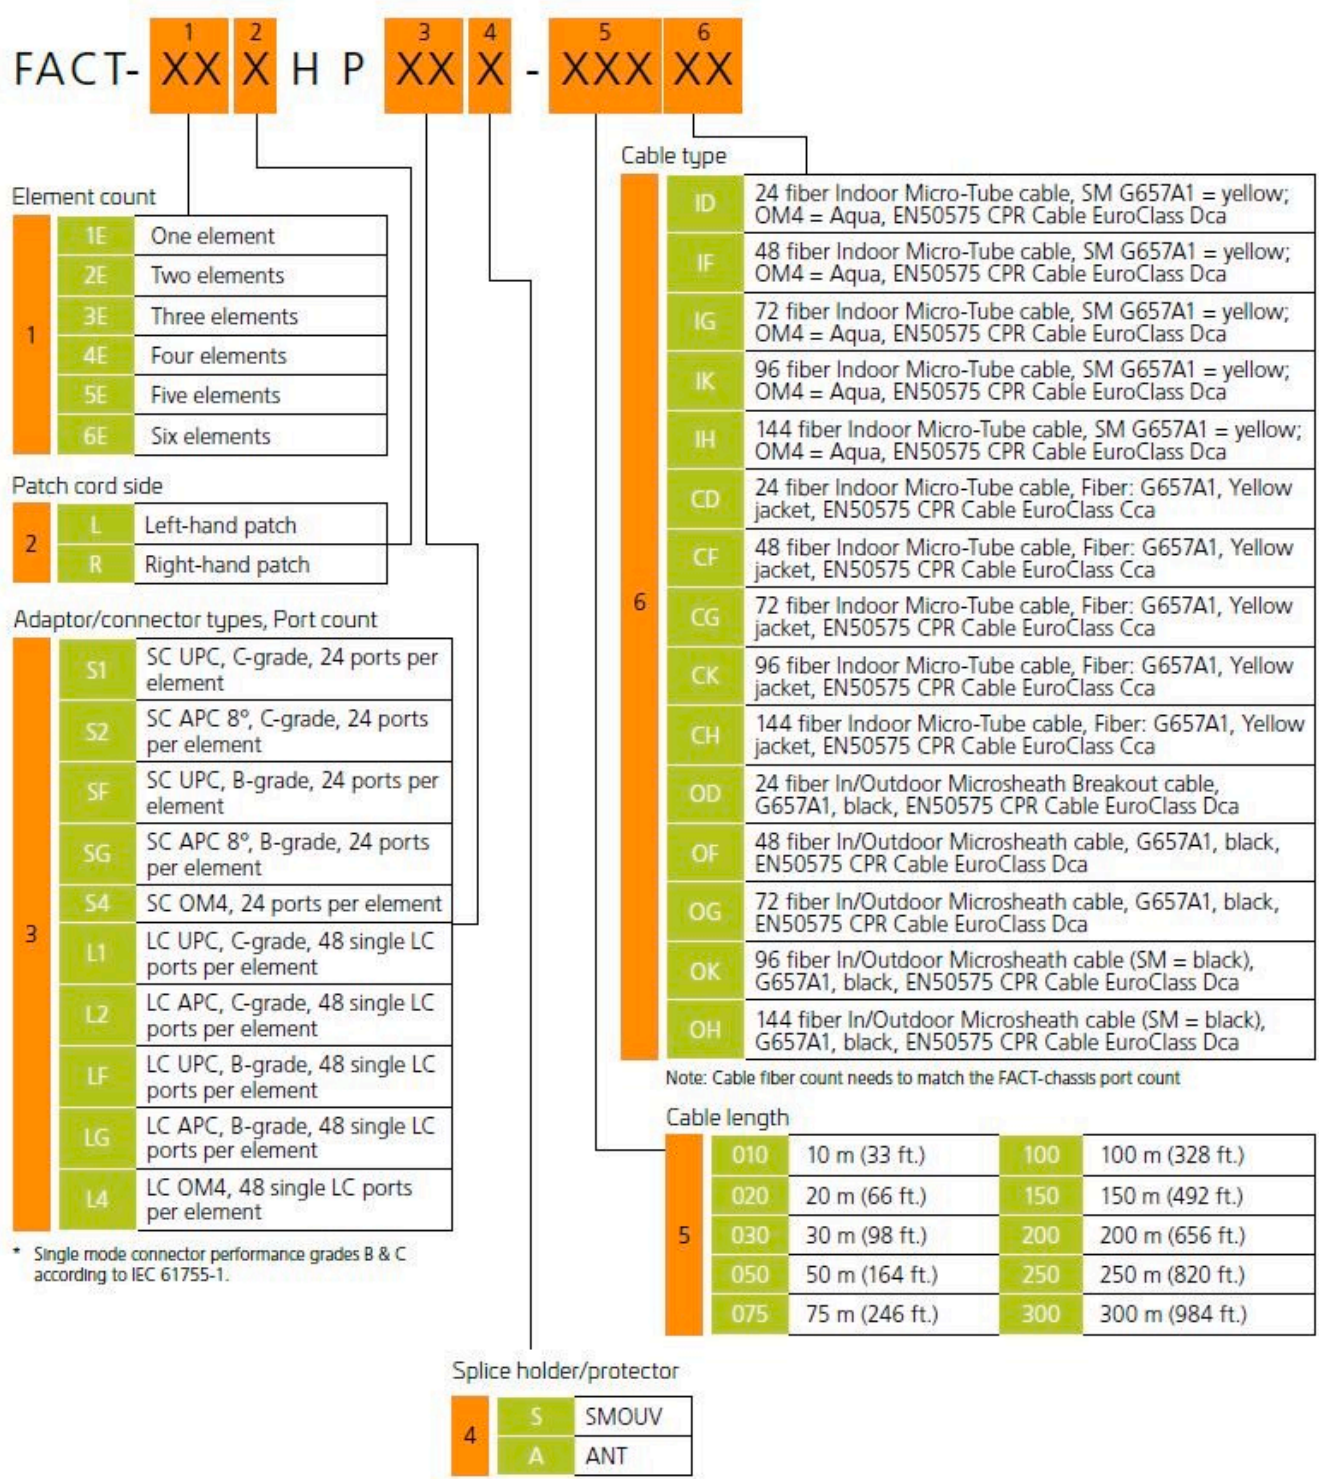

# FACT-CABLED-CHASSIS

---

## Environmental Specifications

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature   | -20 °C to +85 °C (-4 °F to +185 °F)  |
| Flammability Rating   | UL 94 V-0                            |

## Packaging and Weights

|          |                   |
|----------|-------------------|
| Included | Mounting hardware |
|----------|-------------------|