

FACT-PATCH-CHASSIS

Base Product



FACT® Series Fiber Optic Patch Chassis for FACT ODF

The building blocks of the FACT® optical distribution frame system are the FACT® chassis. FACT® chassis can be deployed individually as a single-element chassis, or up to six similar elements can be combined into high fiber-count FACT® chassis. The single-element FACT® chassis measures 30.95 mm (1.22 in.) tall, 30 percent less than the standard HU/1RU (44.45 mm/1.75 in.). Each FACT® element features two hinged trays, providing full front access to both sides of all connections and clear visibility of all ports.

The FACT® patch-only chassis supports cross-connect and interconnect applications and is available with SC and LC adaptors. The FACT patch-only chassis accommodates 24 SC connections or 48 single LC connections per element..

The FACT® patch chassis is available in 6 height versions:

- 1E
- 2E
- 3E
- 4E
- 5E
- 6E

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber patch chassis
Product Brand	FACT®


FACT-PATCH-CHASSIS

Product Series	FACT
General Specifications	
Functionality	Patching Splicing
Application	For use with FACT frames Compatible with FIST-GR3-R frames when backplate is used (optional)
Body Style	Symmetrical
Color	Gray
Interface, front	LC/UPC SC/APC SC/UPC LC/APC
Rack Type	FACT FIST-GR3
Shelf Movement	Sliding

Dimensions

Width	524 mm 20.63 in
Depth	283 mm 11.142 in

Ordering Tree

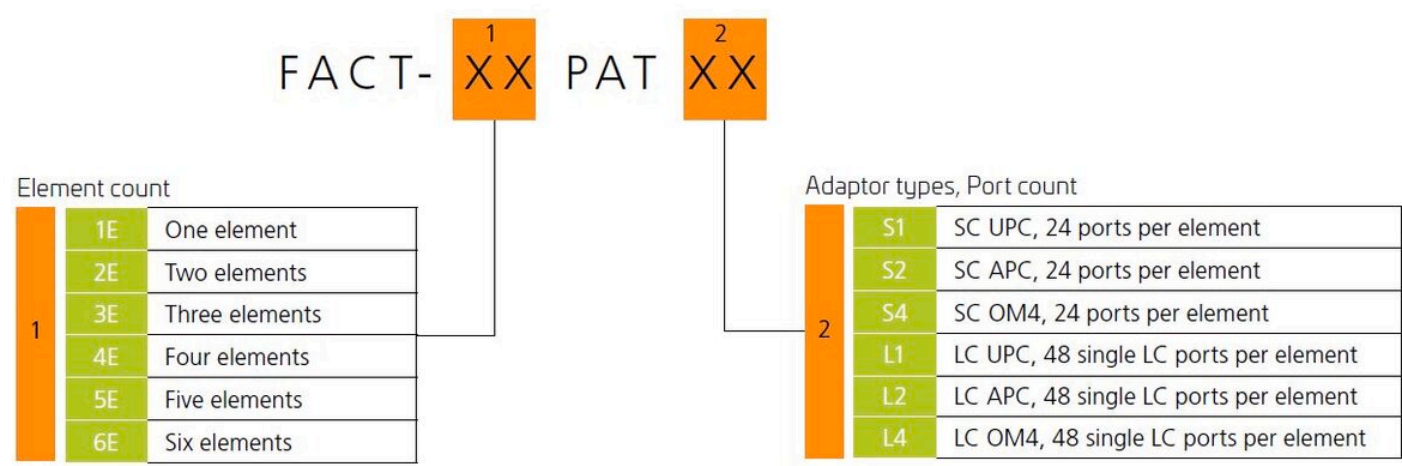

FACT-PATCH-CHASSIS

Environmental Specifications

Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-20 °C to +85 °C (-4 °F to +185 °F)
Flammability Rating	UL 94 V-0

Packaging and Weights

Included	Mounting hardware
----------	-------------------