

FACT-PATCH-SPLICE-CHASSIS

Base Product



FACT® Fiber Optic Patch-Splice Chassis for FACT ODF

The building blocks of the FACT® optical distribution frame system are the FACT® chassis. FACT® chassis can be deployed individually as a single-element chassis, or up to six similar elements can be combined into high fiber-count FACT® chassis. The single-element FACT® chassis measures 30.95 mm (1.22 in.) tall, 30 percent less than the standard HU/1RU (44.45 mm/1.75 in.). Each FACT® element features two hinged trays, providing full front access to both sides of all connections and clear visibility of all ports.

The FACT® Pre-terminated with pigtails, the FACT® splice-patch chassis enables splicing of OSP or ISP cables directly on the frame with no loss of density. Available with SC or LC pre-terminated connections, the high-density chassis accommodates 24 SC or 48 single LC connections per FACT® element and uses the EIA/TIA 598 color-coding standard.

The FACT® patch-splice chassis is available in 6 height versions:

- 1E
- 2E
- 3E
- 4E
- 5E
- 6E

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber patch/splice chassis

FACT-PATCH-SPLICE-CHASSIS

Product Brand	FACT®
Product Series	FACT

General Specifications


Functionality	Patching Splicing
Application	For use with FACT frames Compatible with FIST-GR3-R frames when backplate is used (optional)
Body Style	Symmetrical
Color	Gray
Interface, front	LC/UPC SC/APC SC/UPC LC/APC
Rack Type	FACT FIST-GR3
Shelf Movement	Sliding

Dimensions

Width	524 mm 20.63 in
Depth	283 mm 11.142 in

FACT-PATCH-SPLICE-CHASSIS

Ordering Tree

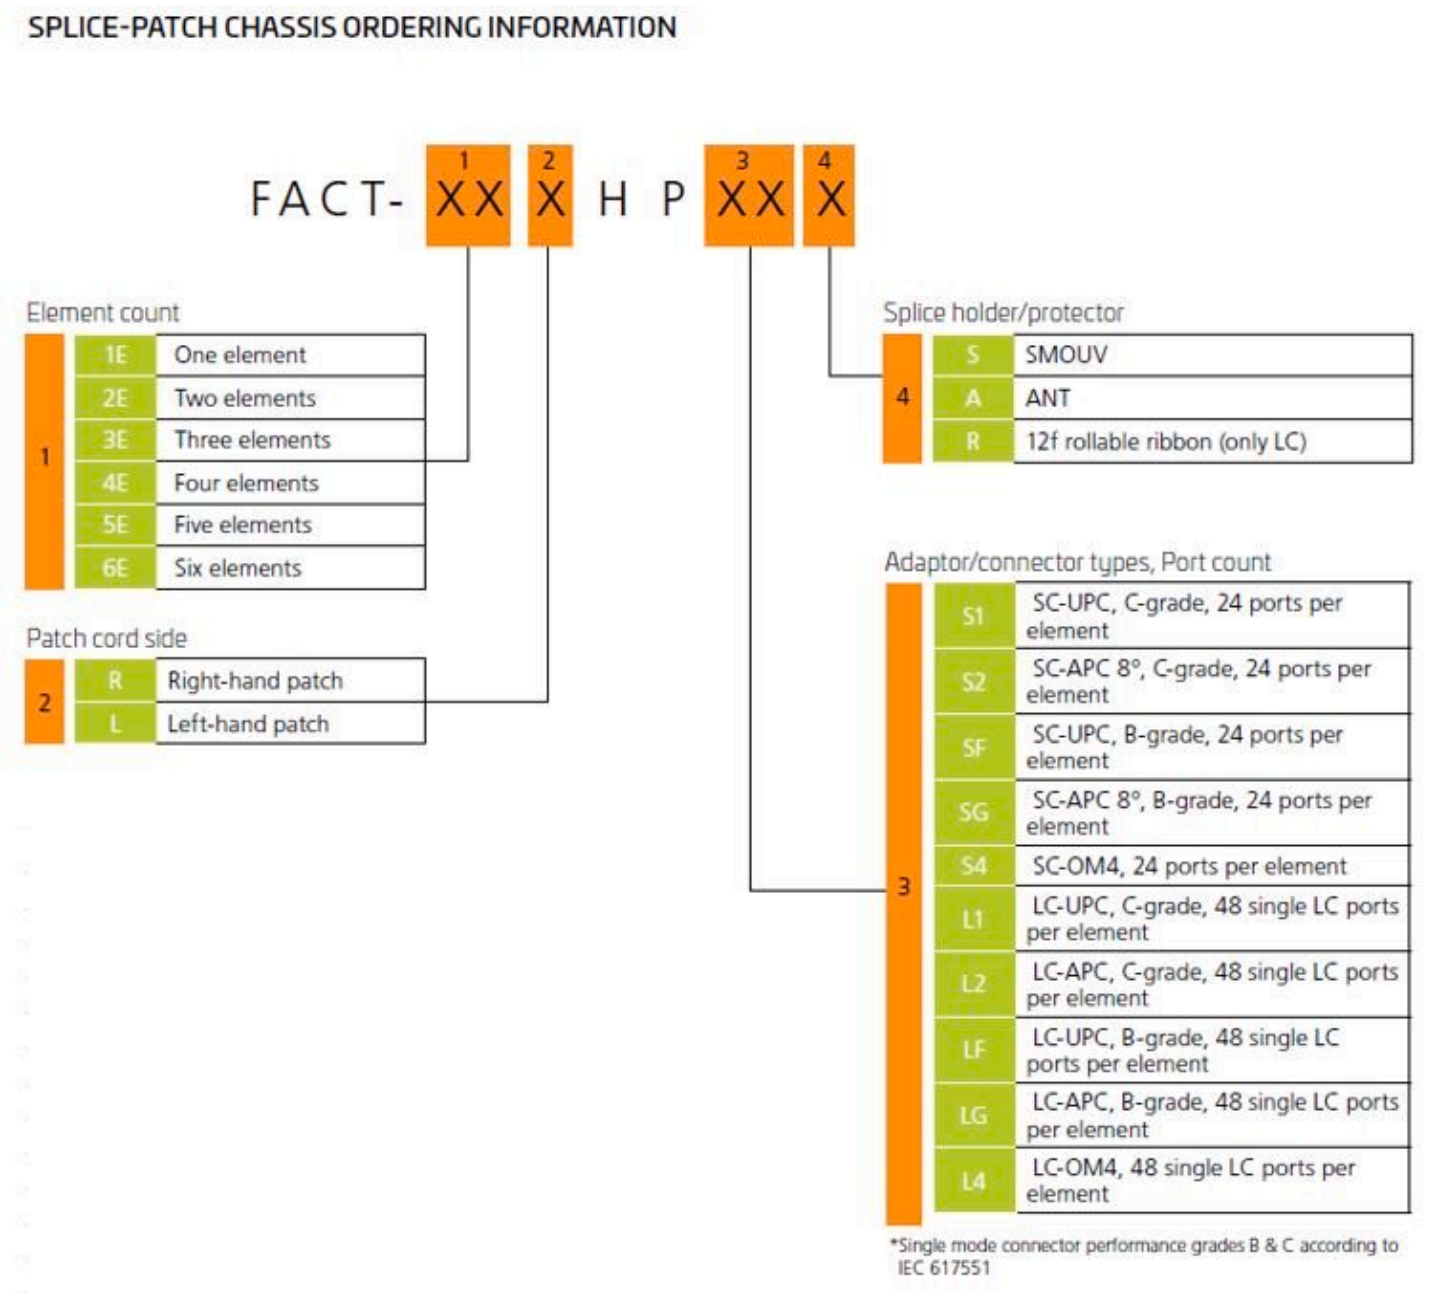

FACT-PATCH-SPLICE-CHASSIS

Packaging and Weights

Included	Mounting hardware
----------	-------------------