


FACT-SPLICE-CHASSIS

Base Product

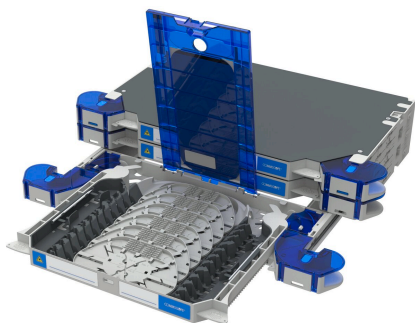

FACT® Fiber Optic Splice Chassis for FACT ODF

The building blocks of the FACT® optical distribution frame system are the FACT® chassis. FACT® chassis can be deployed individually as a single-element chassis, or up to six similar elements can be combined into high fiber-count FACT® chassis. The single-element FACT® chassis measures 30.95 mm (1.22 in.) tall, 30 percent less than the standard HU/1RU (44.45 mm/1.75 in.). Each FACT® element features two hinged trays, providing full front access to both sides of all connections and clear visibility of all ports.

The FACT® splice chassis is a multi-purpose splice shelf featuring up to 96 ANT splices or 72 SMOUV splices per FACT® element. In combination with the FACT-ACCCTU accessories, the FACT® splice chassis supports multiple splice applications, including:

- Outdoor-to-indoor loose-tube cable
- Loose-tube cable to pigtails (single aramid yarn termination)
- Loose-tube cable to breakout or intra-facility (IFC) cable
- Pigtail to pigtail (single aramid yarn termination)

The FACT® splice chassis is available in 4 height versions:

- 1E
- 2E
- 3E
- 4E

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber splice chassis
Product Brand	FACT®
Product Series	FACT

FACT-SPLICE-CHASSIS

General Specifications

Functionality	Splicing
Application	For use with FACT frames Compatible with FIST-GR3-R frames when backplate is used (optional)
Body Style	Symmetrical
Color	Gray
Growth Configuration	Unloaded
Interface, front	Unloaded
Rack Type	FACT FIST-GR3
Shelf Movement	Sliding

Dimensions


Width	524 mm 20.63 in
Depth	283 mm 11.142 in

Splicing Configuration

NUMBER OF TRAYS PER FACT-CHASSIS				
	AO4	S04	A12	S12
1E	12	12	8	6
2E	24	24	16	12
3E	36	36	24	18
4E	48	48	32	24

FACT-SPLICE-CHASSIS

Ordering Tree

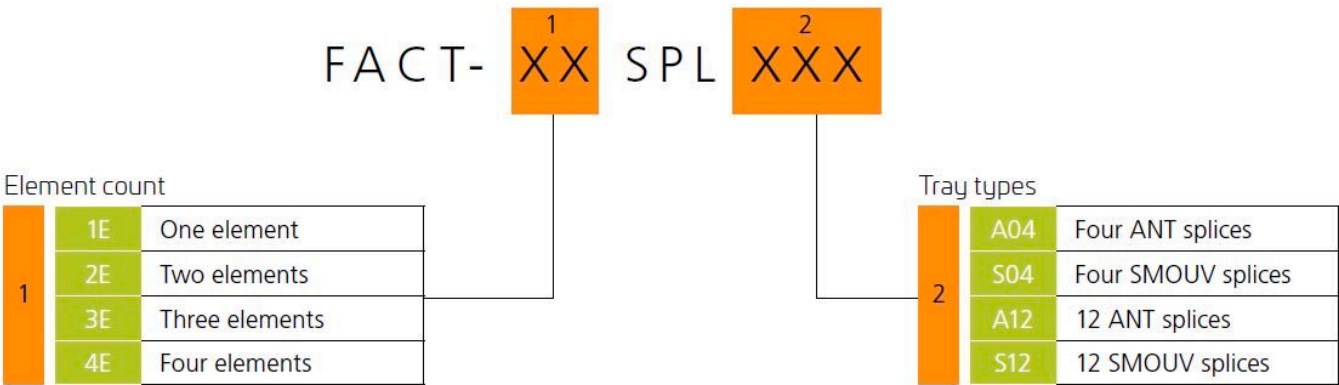

Environmental Specifications

Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-20 °C to +85 °C (-4 °F to +185 °F)
Flammability Rating	UL 94 V-0

Packaging and Weights

Included	Mounting hardware
----------	-------------------

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system