

EDGE™ MTP® Trunk 36F, 50 µm multimode (OM3), 100 ft

CORNING

Part Number:
G937936TPNCLZ100F

EDGE™ MTP® trunks provide the backbone of the EDGE solution. With non-pinned MTP connectors on both ends, these fiber trunk cable assemblies are designed to interface with the EDGE solutions or Plug & Play™ systems modules. All MTP trunks are manufactured with Corning® CleanAdvantage™, MTP trunk cables are shipped with strain-relief clips to allow easy tool-less installation.

Features and Benefits

Snap-in strain-relief clips

Provide easier cable management

Small outer diameter

Improves cable tray fill ratio and allows for imported airflow

Low-loss connectivity

Enables system design flexibility

Bend-improved fiber


Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Fiber optic trunk cable manufactured with Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

Non-pinned MTP connectors on both ends

Fiber optic trunks designed to interface with the EDGE solutions or Plug & Play™ systems modules

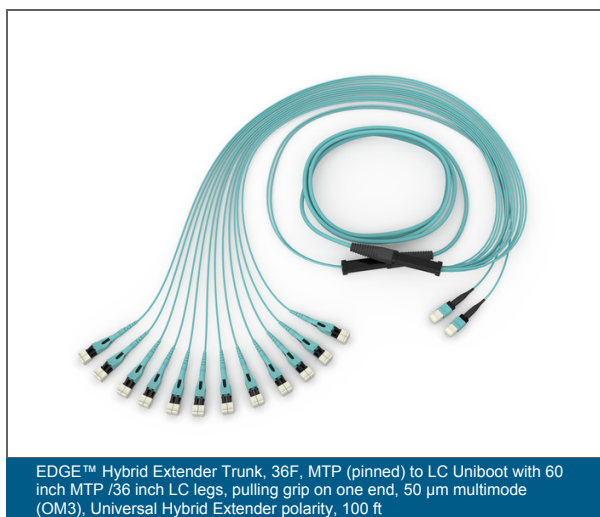

EDGE™ Hybrid Extender Trunk, 36F, MTP (pinned) to LC Uniboot with 60 inch MTP /36 inch LC legs, pulling grip on one end, 50 µm multimode (OM3), Universal Hybrid Extender polarity, 100 ft

EDGE™ MTP® Trunk 36F, 50 µm multimode (OM3), 100 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM3)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Cable Type	Indoor: ANSI/ICEA S-83-596
Connector Assembly Type	MTP to LC

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	36
Polarity	Universal hybrid
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	8 mm (0.31 in)
Min. Bend Radius Installation	120 mm (4.72 in)
Min. Bend Radius Operation	40 mm (1.57 in)
Minimum Conduit Size with 18-in Elbow	64 mm (2.52 in)

EDGE™ MTP® Trunk 36F, 50 µm multimode (OM3), 100 ft

CORNING

Optical Characteristics

Fiber Code	T
Performance Option Code	80
Fiber Category	OM3
Fiber Type	Multimode
Fiber Name	50 µm MM (OM3)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	300 m / -
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® (pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

Specifications - Connector B

Insertion Loss, Max.	0.15 dB
Boot Color	Aqua
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -20 dB

EDGE™ MTP® Trunk 36F, 50 µm multimode (OM3), 100 ft

CORNING

Pulling Grip - Connector A

Pulling grip	TRUE
Tensile Strength	440 N (98.92 lbf)

Dimensions

Length	100 ft
--------	--------

Ordering Information

Product Number	G937936TPNCLZ100F
Packaging Method	Plastic reel

Furcation - Connector A

Leg Length	1524 mm (60 in)
Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)
Leg Count	3

Furcation - Connector B

Leg Color	Aqua
Furcation Type	EDGE™ Size 2, 20 mm x 20 mm x 108.6 mm
Leg Diameter	2 mm (0.08 in)
Leg Length	914 mm (35.98 in)
Leg Count	18

EDGE™ MTP® Trunk 36F, 50 µm multimode (OM3), 100 ft

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.