

# ALTOS® Loose Tube, Gel-Free Cable 24 F, Single-mode (OS2)

CORNING

**Part Number:**  
**024EU4-T4100D20**

Corning ALTOS® all-dielectric gel-free cables are designed for outdoor and limited indoor use for backbones in lashed aerial and duct installations. The loose tube gel-free design is fully waterblocked using craft-friendly, water-swallowable materials, which means cable access is simple and no clean up is required. The flexible craft-friendly buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to strip.

## Features and Benefits

### **Gel-free waterblocking technology**


Craft-friendly cable preparation

### **Polyethylene jacket**


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

### **All-dielectric construction**

Requires no grounding or bonding

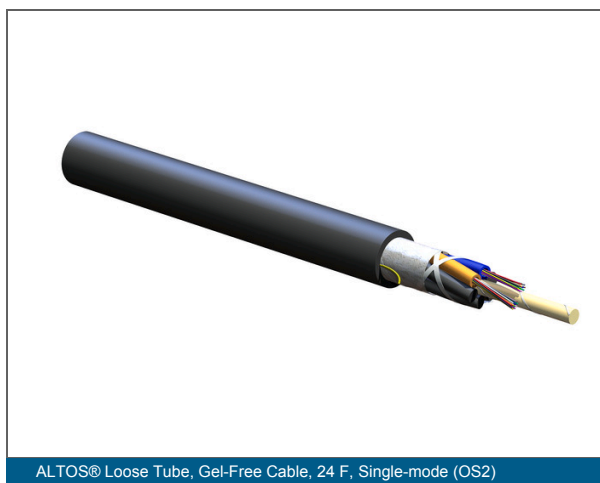

ALTOS® Loose Tube, Gel-Free Cable, 24 F, Single-mode (OS2)

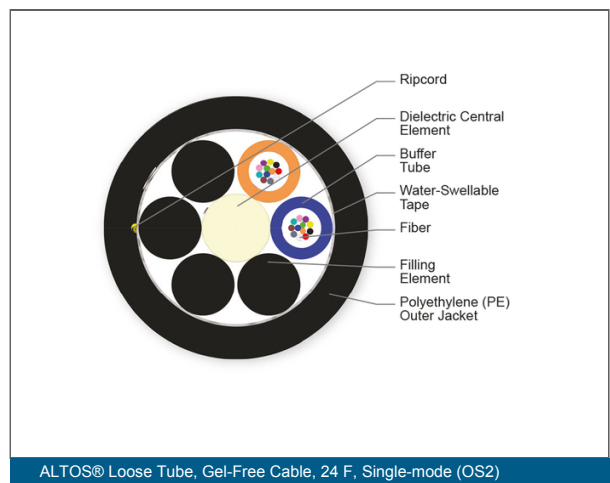

ALTOS® Loose Tube, Gel-Free Cable, 24 F, Single-mode (OS2)

# ALTOS® Loose Tube, Gel-Free Cable 24 F, Single-mode (OS2)

CORNING

## Specifications

### General Specifications

|                      |                   |
|----------------------|-------------------|
| Installation Methods | Aerial, Duct      |
| Cable Type           | Loose Tube        |
| Environment          | Outdoor           |
| Product Type         | Dielectric        |
| Fiber Category       | Single-mode (OS2) |
| Cable geometry       | Round             |

### Standards

|                          |                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------|
| RoHS                     | Free of hazardous substances according to RoHS 2011/65/EU                                                       |
| Common Installations     | Outdoor lashed aerial and duct, indoor when installed according to National Electrical Code® (NEC®) Article 770 |
| Design and Test Criteria | ANSI/ICEA S-87-640                                                                                              |

### Environmental Conditions

|                                 |                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes                           | Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results. |
| Temperature Range, Installation | -30 °C to 70 °C (-22 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Operation    | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Storage      | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |

### Cable Design

|                       |                   |
|-----------------------|-------------------|
| Central Element       | Dielectric        |
| Fiber Count           | 24                |
| Number of Ripcords    | 1                 |
| Outer Jacket Color    | Black             |
| Outer Jacket Material | Polyethylene (PE) |

# ALTOS® Loose Tube, Gel-Free Cable 24 F, Single-mode (OS2)

CORNING

## Cable Design

|                            |                                                                                  |
|----------------------------|----------------------------------------------------------------------------------|
| Buffer Tube Color          | Blue, Orange                                                                     |
| Buffer Tube Diameter       | 2.5 mm (0.1 in)                                                                  |
| Number of Active Tubes     | 2                                                                                |
| Number of Filling Elements | 4                                                                                |
| Number of Tube Positions   | 6                                                                                |
| Tape                       | Water-swellable                                                                  |
| Fiber Coloring             | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube            | 12                                                                               |
| Color Code Standards       | Telcordia                                                                        |

## Mechanical Specifications

|                                   |                     |
|-----------------------------------|---------------------|
| Max. Tensile Strength, Long-Term  | 890 N (200.08 lbf)  |
| Max. Tensile Strength, Short-Term | 2700 N (606.98 lbf) |
| Nominal Outer Diameter            | 10.5 mm (0.41 in )  |
| Min. Bend Diameter Installation   | 316 mm (12.44 in)   |
| Min. Bend Diameter Operation      | 210 mm (8.27 in)    |

## Optical Characteristics

|                         |                                      |
|-------------------------|--------------------------------------|
| Fiber Code              | E                                    |
| Performance Option Code | 00                                   |
| Fiber Category          | OS2                                  |
| Fiber Type              | Single-mode (OS2) / 250 µm           |
| Fiber Name              | Single-mode (OS2)                    |
| Maximum Attenuation     | 0.35 dB/km / 0.35 dB/km / 0.25 dB/km |
| Wavelengths             | 1310 nm / 1383 nm / 1550 nm          |
| Fiber Compliance        | ITU-T G.652.D                        |

# ALTOS® Loose Tube, Gel-Free Cable 24 F, Single-mode (OS2)



| Dimensions   |                             |
|--------------|-----------------------------|
| Cable Weight | 73 kg/km (49.05 lb/1000 ft) |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.