

12-Fiber MTP® PRO Jumper 12F, 50 μm multimode (OM4), 10 ft



Part Number:
J757512QE8-NB010F

EDGE™ MTP® PRO patch cords are used to create a connection between MTP adapter panels, conversion modules, and electronics, typically providing connectivity within the rack or the row. These cable assemblies feature a smaller (2.0 mm) outside diameter than traditional 12-fiber patch cords to improve finger access and reduce congestion and increase airflow in the horizontal and vertical rack space. EDGE 12-fiber MTP patch cords have the same connector size and cable footprint as LC duplex patch cords used today. The density, airflow, and cable management advantages of EDGE solutions was preserved as you migrate to higher data rates. These patch cords are manufactured using Corning® CleanAdvantage™ technology and shipped with optimized dust caps, eliminating the need for cleaning and scoping prior to the initial field connection. They are built with MTP PRO push-pull connectors, allowing for a simple one-step color-coded polarity change without removing the connector housing. The connector also provides the capability for field-friendly pinning configuration changes with safe handling of pins and easy color identification while maintaining product integrity.



Features and Benefits

Slim round 2-fiber interconnect cable

Improves airflow and reduces congestion

MTP® PRO connectors


Allows for pinning and polarity changes in the field

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

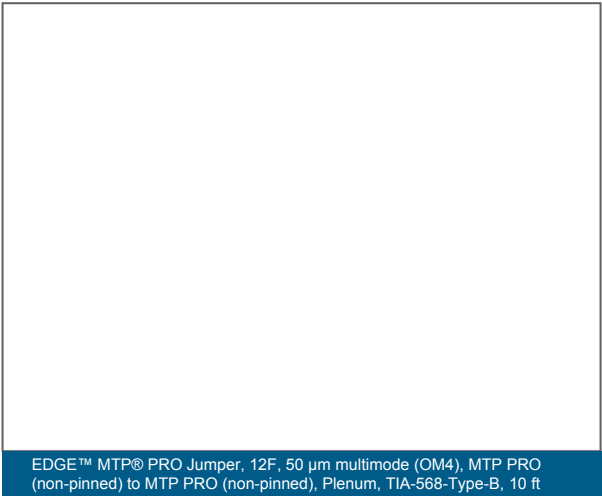

12-Fiber MTP® PRO Jumper 12F, 50 µm multimode (OM4), 10 ft

CORNING

Specifications

General Specifications

Flame Rating	NFPA 262 (for plenum, riser and general building applications)
Fiber Category	50 µm MM (OM4)
Cable Assembly Type	EDGE™ Jumper
Environment	Indoor
Application	Data Center
Cable Type	Interconnect
Assembly Insertion Loss	≤ 0.5 dB
Connector Assembly Type	MTP to MTP

Standards

Fiber Standards	TIA/EIA-492AAAC-A, Tested with minEMBc method to TIA/EIA-455-220, IEC 60793-2-10 Type A1a.2 Ed.2.0, IEC 60793-1-49 Ed.2.0, ITU-T G.651, ISO/IEC 11801 Ed.2.2 Cat. OM3
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)

Design

Fiber Count	12
Polarity	TIA-568 Type-B
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	2 mm (0.08 in)
------------------------	-----------------

12-Fiber MTP® PRO Jumper 12F, 50 µm multimode (OM4), 10 ft

CORNING

Mechanical Specifications

Max. Tensile Strength for Installation	220 N (49.46 lbf)
Min. Bend Radius Installation	30 mm (1.18 in)
Min. Bend Radius Operation	10 mm (0.39 in)
Weight	3.5 kg/km (2.35 lb/1000 ft)

Optical Characteristics

Fiber Code	T
Performance Option Code	90
Fiber Category	OM4
Fiber Type	Multimode
Fiber Name	50 µm MM (OM4)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km

Specifications - Connector A

Polish	PC
Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® PRO (non-pinned)
Ferrule Material	Composite
Boot Type	Simplex
Reflectance	< -20 dB

12-Fiber MTP® PRO Jumper 12F, 50 µm multimode (OM4), 10 ft

CORNING

Specifications - Connector B

Polish	PC
Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® PRO (non-pinned)
Ferrule Material	Composite
Boot Type	Simplex
Reflectance	< -20 dB

Dimensions

Length	10 ft
Cable Weight	3.5 kg/km (2.35 lb/1000 ft)

Ordering Information

Product Number	J757512QE8-NB010F
Units per Delivery	1/1

Cable Material

Fiber Count	12
Fiber Type	OM4 MM
Outer Diameter	Standard
Flame Rating	Plenum
Armor	Non-armored
Length	10
Unit of Measure	Feet
Cable Type	Interconnect
Fiber Mode	Multimode

12-Fiber MTP® PRO Jumper 12F, 50 µm multimode (OM4), 10 ft

CORNING

CONNECTOR_A_1 Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Loss	Low Loss
Connector Pinning	Non-Pinned

CONNECTOR_B Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Pinning	Non-Pinned
Connector Loss	Low Loss



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.