


TRANSMISSION TYPE	GRADE	KIT P/N	KIT DESCRIPTION	FERRULE P/N	BOOT P/N
SINGLE-MODE	STANDARD SM	19654	Kit, Ferrule 12F SM MT 80um, Pre-Angled, w/boot	18779	200002-01

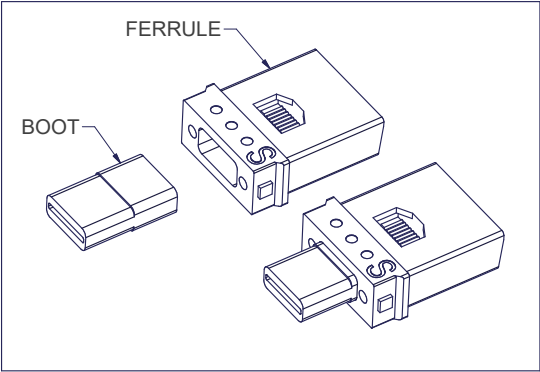

NOTES:

1. CONFIRM FIBER OD TOLERANCE IS COMPATIBLE.
2. US CONEC RECOMMENDS USING TERMINATION TOOL PART NUMBER 21083 TO CREATE RIBBONS WITH 250µM FIBER PITCH.

USCONEC LTD. PROPRIETARY

THIS DOCUMENT AND THE ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS USCONEC LTD. PROPERTY. DISCLOSE OR DUPLICATE FOR OTHERS ONLY AS AUTHORIZED BY USCONEC LTD.

Material: **N/A**

REV.	DATE	DESCRIPTION	ECN
X1	2/10/21	----	2241-rr
A	4/22/21	INITIAL RELEASE	2241-rr

CUSTOMER DRAWING

DIMENSIONS FOR REFERENCE ONLY

THIRD ANGLE PROJECTION

METRIC/mm

USCONEC

Hickory, NC
800-769-0944
www.usconec.com

TITLE
KITS, FERRULE & BOOT, 80 MICRON

SIZE B	S&M PART NO.: SEE TABLE	DWG NO.: C19654	REV A
SCALE N.T.S.	Drafter: R. RAWALD	Date: 10/28/2020	SHEET 1 OF 1

▲ DENOTES CRITICAL DIMENSION