


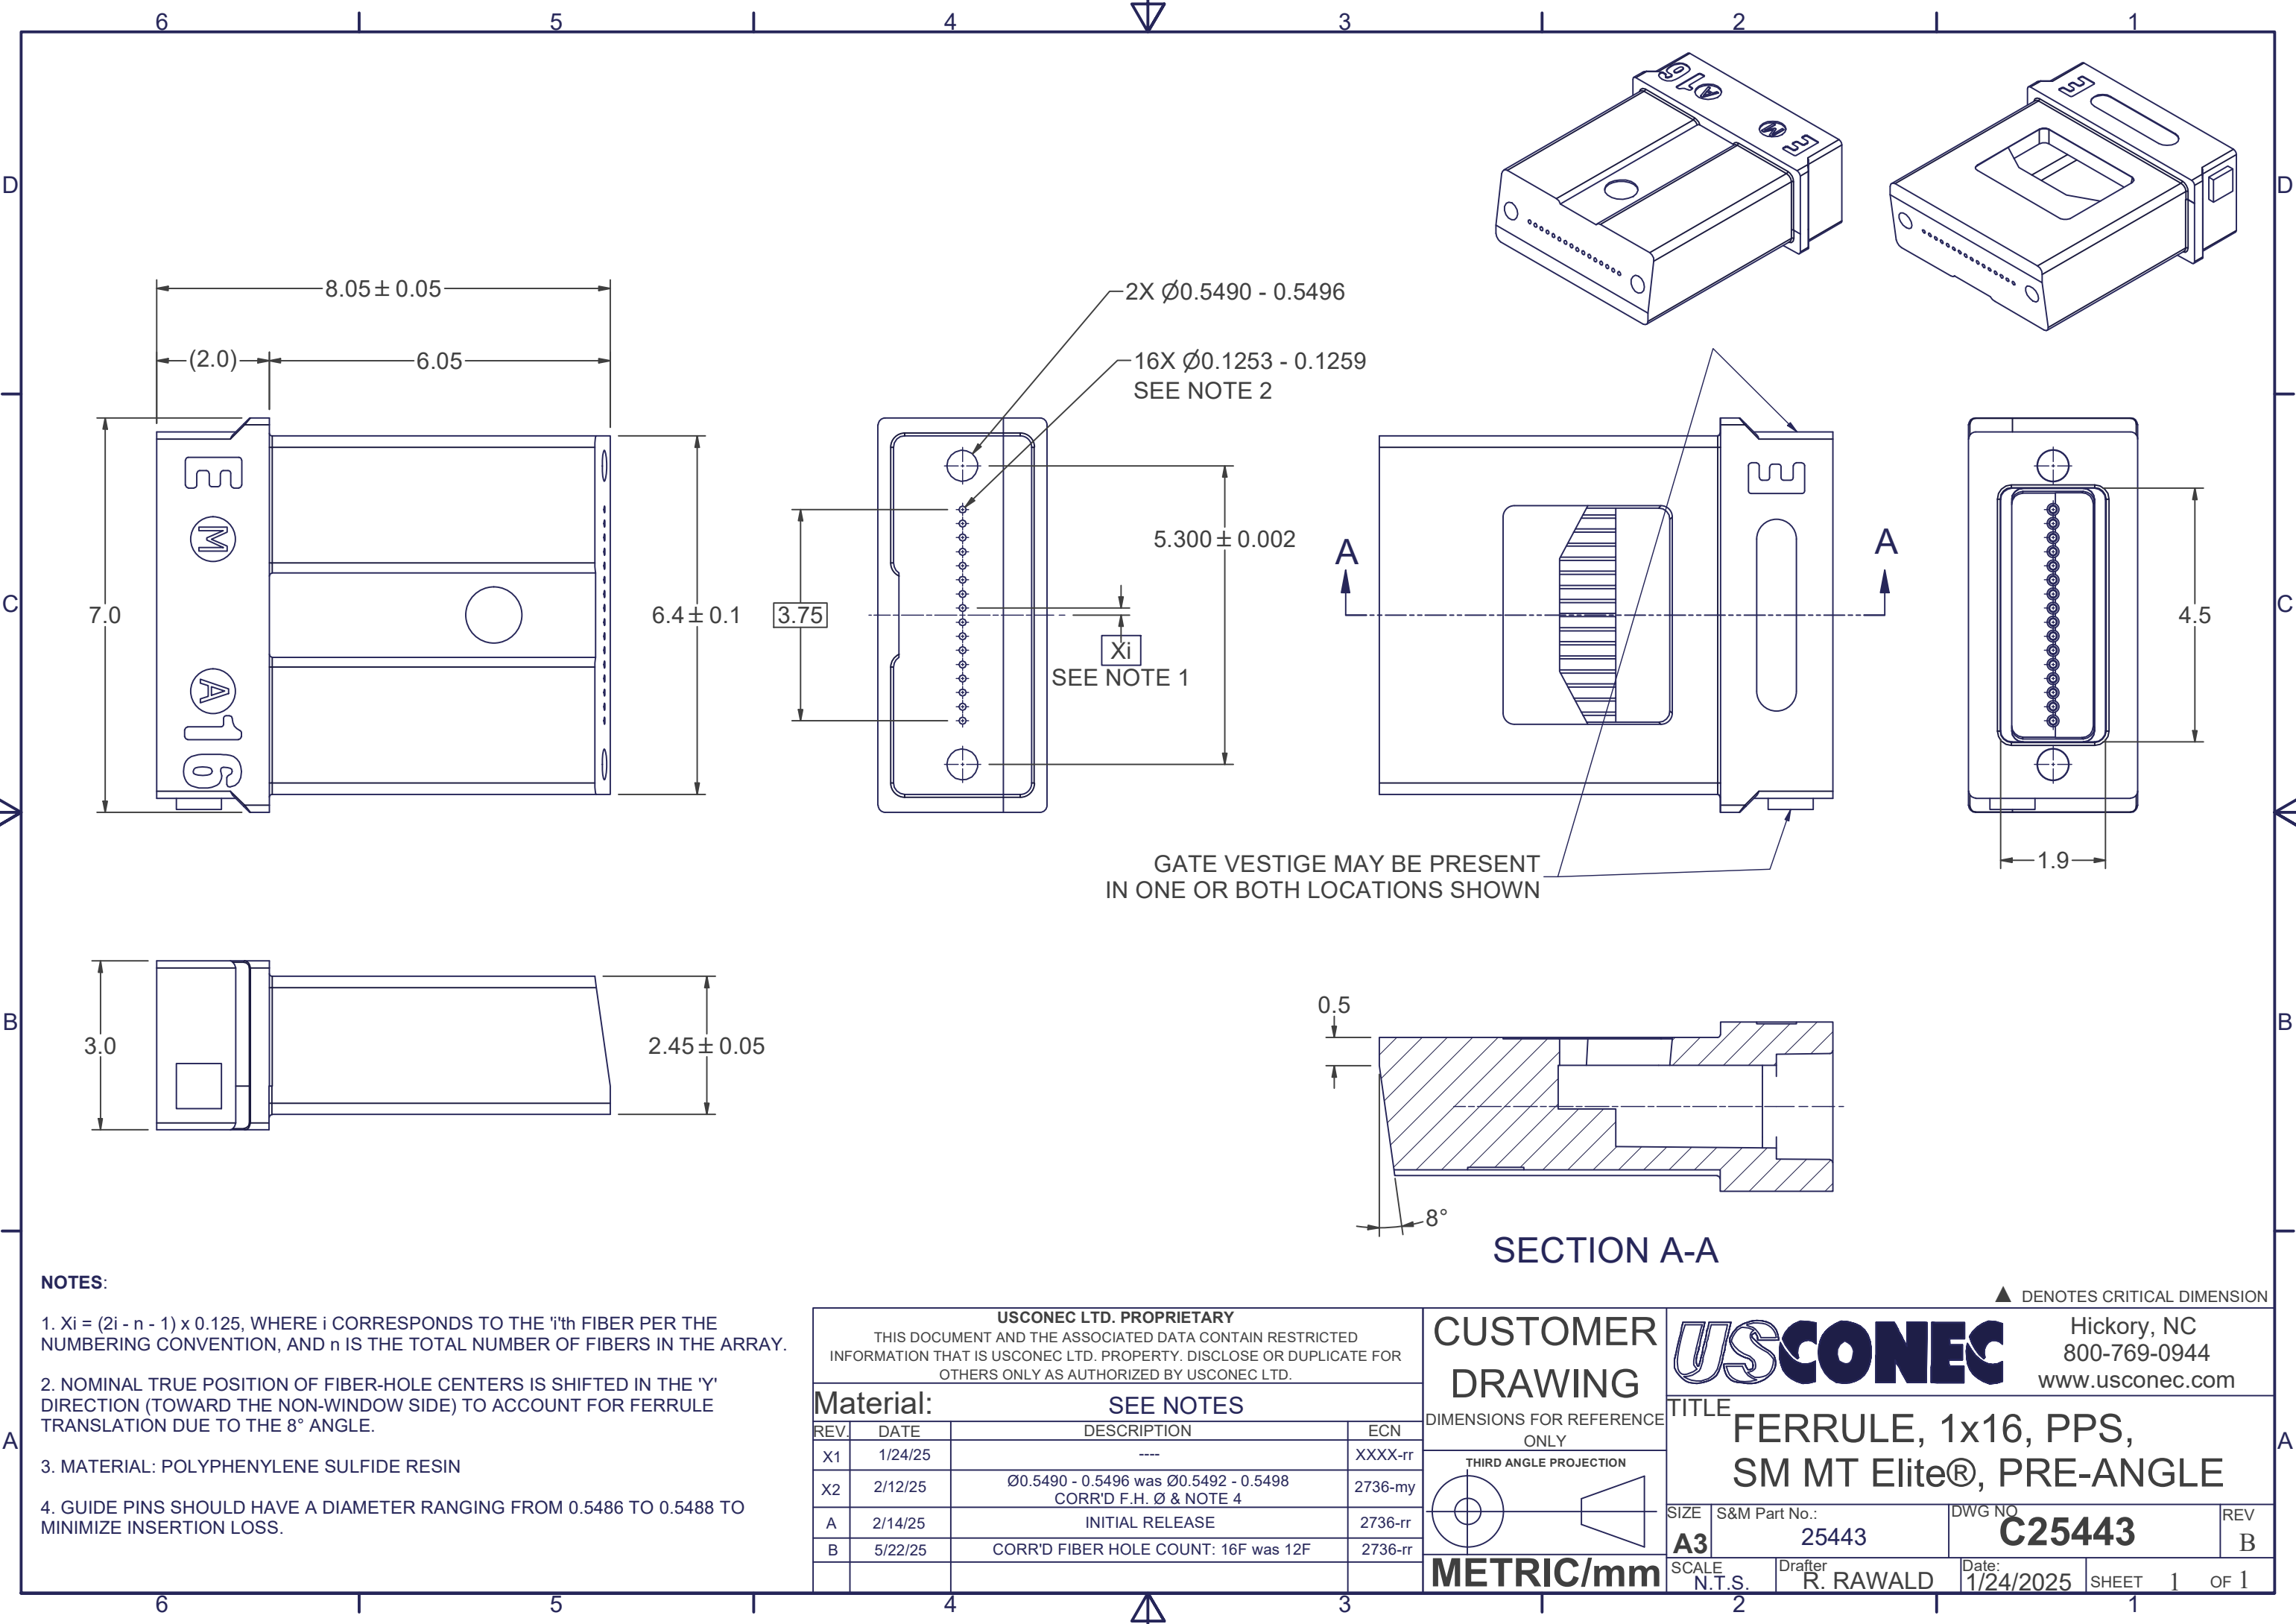

- NOTES:**
1. $X_i = (2i - n - 1) \times 0.125$, WHERE i CORRESPONDS TO THE i 'th FIBER PER THE NUMBERING CONVENTION, AND n IS THE TOTAL NUMBER OF FIBERS IN THE ARRAY.
 2. NOMINAL TRUE POSITION OF FIBER-HOLE CENTERS IS SHIFTED IN THE 'Y' DIRECTION (TOWARD THE NON-WINDOW SIDE) TO ACCOUNT FOR FERRULE TRANSLATION DUE TO THE 8° ANGLE.
 3. MATERIAL: POLYPHENYLENE SULFIDE RESIN
 4. GUIDE PINS SHOULD HAVE A DIAMETER RANGING FROM 0.5486 TO 0.5488 TO MINIMIZE INSERTION LOSS.

USCONEC LTD. PROPRIETARY			
THIS DOCUMENT AND THE ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS USCONEC LTD. PROPERTY. DISCLOSE OR DUPLICATE FOR OTHERS ONLY AS AUTHORIZED BY USCONEC LTD.			
Material:		SEE NOTES	
REV.	DATE	DESCRIPTION	ECN
X1	1/24/25	----	XXXX-rr
X2	2/12/25	Ø0.5490 - 0.5496 was Ø0.5492 - 0.5498 CORR'D F.H. Ø & NOTE 4	2736-my
A	2/14/25	INITIAL RELEASE	2736-rr
B	5/22/25	CORR'D FIBER HOLE COUNT: 16F was 12F	2736-rr

CUSTOMER
DRAWING

DIMENSIONS FOR REFERENCE
ONLY

THIRD ANGLE PROJECTION

METRIC/mm

Hickory, NC
800-769-0944
www.usconec.com

TITLE

FERRULE, 1x16, PPS,
SM MT Elite®, PRE-ANGLE

SIZE

A3

S&M Part No.:

25443

DWG NO

C25443

SCALE

N.T.S.

Drafter

R. RAWALD

Date:

1/24/2025

SHEET

1

OF

1

REV

B

▲ DENOTES CRITICAL DIMENSION