

Optical Distribution Frame Single EDGE™ 19 Frame, 7ft

CORNING

Part Number:
PF2TDAFG5RCANNNN2PADQ

The Corning® Optical Distribution Frame is optimized for high-density cross-connect applications. When fully loaded with EDGE 4U housings the optical distribution frame dual-frame model provides a total capacity of 5,760 LC Duplex or MTP ports / 11,520 LC Simplex ports while the single-frame provides total capacity of 2880 LC Duplex or MTP ports / 5,760 LC Simplex ports

With modular jumper management plates and segmented jumper management hubs, a single 4m patchcord length allows patching from any port to any other port on the dual or single optical distribution frame. Gravity managed slack storage ensures that any single jumper can be added or removed in less than 2 minutes even when fully populated. Bottom Jumper Management Channels allow routing fibers at the bottom of cabinet-frame row instead of in dedicated overhead cable trays.

Front and back doors and side panels are available as accessories. The modular construction means that the complete optical distribution frame can be quickly assembled by a single installer.

Features and Benefits

Modular Jumper management plates with cage nut holes that accept modular hub

Mounting modular hubs at the top part of mounting place allows usage of the same hub for both patching and keeping extra jumper over lengths in a common area

Bottom channel kit for 900 mm wide open cabinets

Allow routing fibers at the bottom of cabinet - frame instead of dedicated overhead trays

Cable and Trunk Strain relief kits mounted at the rear side of the cabinet


Easy routing, dressing and strain relieving optical cables or pre-terminated trunks

Fiber cable slack storage kit

Allows keeping extra loose tubes from outside plant cables that can be used for future troubleshooting purposes

Usage of 4 meter jumpers for single and dual frame cross connect system

Ability to keep inventory of only one type of 4 meter patch cords

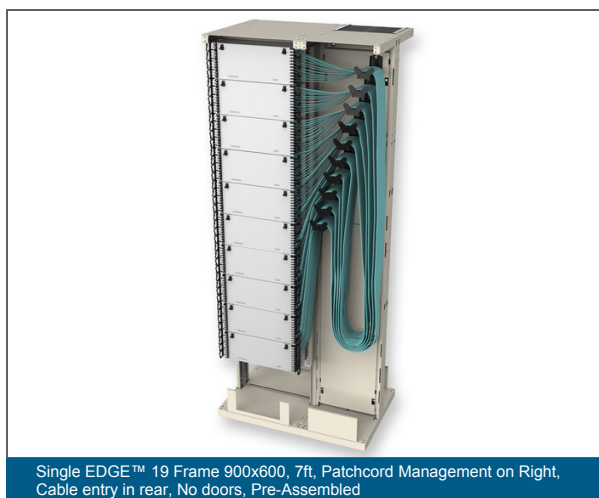

Single EDGE™ 19 Frame 900x600, 7ft, Patchcord Management on Right, Cable entry in rear, No doors, Pre-Assembled

Optical Distribution Frame Single EDGE™ 19 Frame, 7ft

CORNING

Specifications

General Specifications

Product Type	Frames and Cable Managers
Access Type	Front and rear access fixed
Mounting Type	Floor-mount
Application	Data Center
Security	Not Secured[not-secured]

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Lockable	No
Housing Material	Metal
Color	Platinum

Ordering Information

Product Number	PF2TDAFG5RCANNNN2PADQ
Package Contents	Optical Distribution Frame Assembly, Installation Instructions
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.