

EDGE™ Armored Trunk EDGE™ MTP® Trunk Universal, OM4 24F, Distribution Armored Indoor Plenum cable, MTP® 12F Non-pinned 840.0 legs to MTP® 12F Non-pinned 33 in legs, Grip: One End, 100 Feet

CORNING

Part Number:
G757524QADDDU100F

EDGE™ MTP® trunks provide the backbone of the EDGE Solution. With non-pinned MTP connectors on both ends of the cable, the trunks are designed to interface with EDGE or Plug & Play™ modules. All trunks are shipped with strain-relief clips that allow for tool-less installation in both EDGE and Plug & Play housings. The trunks conform to TIA-568 Type-B polarity.

Features and Benefits

Snap-in strain-relief clips

Provide easier cable management

Small outer diameter

Improves the cable tray fill ratio and allows for improved airflow

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

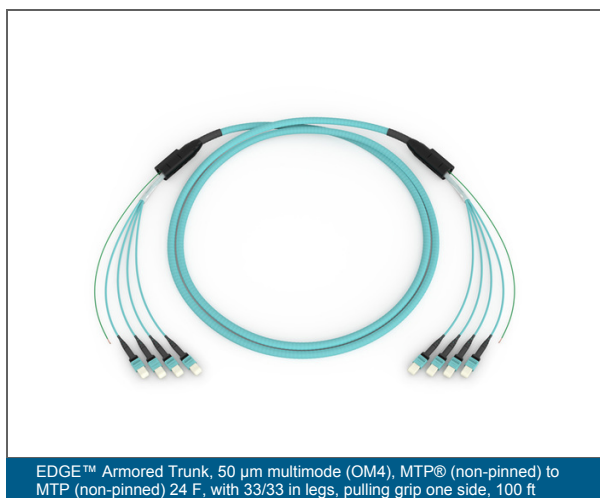

EDGE™ Armored Trunk EDGE™ MTP® Trunk Universal, OM4 24F, Distribution Armored Indoor Plenum cable, MTP® 12F Non-pinned 840.0 legs to MTP® 12F Non-pinned 33 in legs, Grip: One End, 100 Feet

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM4)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Application	Data Center
Cable Type	Indoor: ANSI/ICEA S-83-596

Standards

Fiber Standards	TIA/EIA-492AAAC-A, Tested with minEMBc method to TIA/EIA-455-220, IEC 60793-2-10 Type A1a.2 Ed.2.0, IEC 60793-1-49 Ed.2.0, ITU-T G.651, ISO/IEC 11801 Ed.2.2 Cat. OM3
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)

Design

Fiber Count	24
Polarity	Universal, TIA-568 Type-B

Mechanical Specifications

Nominal Outer Diameter	13.7 mm (0.54 in)
Min. Bend Radius Installation	205.5 mm (8.09 in)
Min. Bend Radius Operation	68.5 mm (2.7 in)

**EDGE™ Armored Trunk EDGE™ MTP® Trunk
Universal, OM4 24F, Distribution Armored Indoor
Plenum cable, MTP® 12F Non-pinned 840.0 legs to
MTP® 12F Non-pinned 33 in legs, Grip: One End,
100 Feet**

CORNING

Optical Characteristics

Fiber Code	T
Performance Option Code	90
Fiber Category	OM4
Fiber Type	Multimode
Fiber Name	50 µm MM (OM4)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	≤ -20 dB

Specifications - Connector B

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	≤ -20 dB

**EDGE™ Armored Trunk EDGE™ MTP® Trunk
Universal, OM4 24F, Distribution Armored Indoor
Plenum cable, MTP® 12F Non-pinned 840.0 legs to
MTP® 12F Non-pinned 33 in legs, Grip: One End,
100 Feet**

CORNING

Pulling Grip - Connector A

Pulling grip	Yes
Grip Outer Diameter	51 mm (2.01 in)

Dimensions

Length	100 ft
Weight	4350 kg

Ordering Information

Product Number	G757524QADDDU100F
Packaging Method	Plastic reel
Units per Delivery	1/1

Cable Material

Fiber Count	24
Fiber Type	OM4 MM
Outer Diameter	Standard
Flame Rating	Plenum
Aarmor	Armored
Length	100
Unit of Measure	Feet
Cable Type	Distribution
Fiber Mode	Multimode

CONNECTOR_A_1 Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Loss	Low Loss

**EDGE™ Armored Trunk EDGE™ MTP® Trunk
Universal, OM4 24F, Distribution Armored Indoor
Plenum cable, MTP® 12F Non-pinned 840.0 legs to
MTP® 12F Non-pinned 33 in legs, Grip: One End,
100 Feet**

CORNING

CONNECTOR_A_1 Material

Connector Pinning	Non-Pinned
-------------------	------------

CONNECTOR_B Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Pinning	Non-Pinned
Connector Loss	Low Loss

Furcation A Material

Leg Length	33 in
Leg Length	840 mm (33.07 in)
Furcation Type	Size 1
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)
Leg Count	2

Furcation - Connector B

Leg Color	Aqua
Furcation Type	Size 1
Leg Diameter	2 mm (0.08 in)
Leg Length	840 mm (33.07 in)
Leg Count	2
Leg Length	33 in

**EDGE™ Armored Trunk EDGE™ MTP® Trunk
Universal, OM4 24F, Distribution Armored Indoor
Plenum cable, MTP® 12F Non-pinned 840.0 legs to
MTP® 12F Non-pinned 33 in legs, Grip: One End,
100 Feet**

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.