

# EDGE™ Armored Trunk 50 µm multimode (OM4), MTP® (non-pinned) to MTP (non-pinned) 36 F, with 33/33 in legs, pulling grip one side, 100 ft

CORNING

**Part Number:**  
**G757536QADDDU100F**

EDGE™ MTP® trunks provide the backbone of the EDGE Solution. With non-pinned MTP connectors on both ends of the cable, the trunks are designed to interface with EDGE or Plug & Play™ modules. All trunks are shipped with strain-relief clips that allow for tool-less installation in both EDGE and Plug & Play housings. The trunks conform to TIA-568 Type-B polarity.

## Features and Benefits

### **Snap-in strain-relief clips**

Provide easier cable management

### **Small outer diameter**

Improves the cable tray fill ratio and allows for improved airflow

### **Low-loss connectivity**


Enables system design flexibility

### **Bend-improved fiber**

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

### **Corning® CleanAdvantage™ technology and optimized dust cap**

Eliminates the need for scoping and cleaning prior to initial field connection

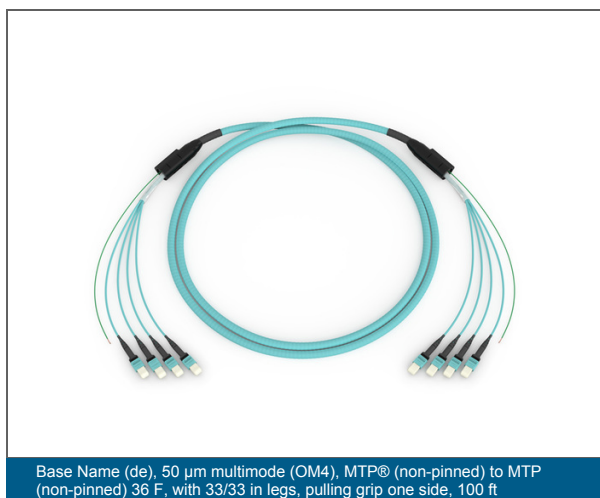

Base Name (de), 50 µm multimode (OM4), MTP® (non-pinned) to MTP (non-pinned) 36 F, with 33/33 in legs, pulling grip one side, 100 ft

# EDGE™ Armored Trunk 50 µm multimode (OM4), MTP® (non-pinned) to MTP (non-pinned) 36 F, with 33/33 in legs, pulling grip one side, 100 ft

CORNING

## Specifications

### Standards

|                 |                                                                                                                                                                       |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fiber Standards | TIA/EIA-492AAAC-A, Tested with minEMBc method to TIA/EIA-455-220, IEC 60793-2-10 Type A1a.2 Ed.2.0, IEC 60793-1-49 Ed.2.0, ITU-T G.651, ISO/IEC 11801 Ed.2.2 Cat. OM3 |
| RoHS            | Free of hazardous substances according to RoHS 2011/65/EU                                                                                                             |

### Environmental Conditions

|                     |                                         |
|---------------------|-----------------------------------------|
| Moisture Resistance | MIL-STD-202, Method 106, except Step 7B |
|---------------------|-----------------------------------------|

### Design

|          |                           |
|----------|---------------------------|
| Polarity | Universal, TIA-568 Type-B |
|----------|---------------------------|

### Optical Characteristics

|                                         |                          |
|-----------------------------------------|--------------------------|
| Fiber Code                              | T                        |
| Performance Option Code                 | 90                       |
| Fiber Category                          | OM4                      |
| Fiber Type                              | Multimode                |
| Fiber Name                              | 50 µm MM (OM4)           |
| Maximum Attenuation                     | 2.8 dB/km / 1.0 dB/km    |
| Wavelengths                             | 850 nm / 1300 nm         |
| Fiber Compliance                        | IEC 60793-2-10           |
| Fiber Core Diameter                     | 50 µm                    |
| Serial 1 Gigabit Ethernet               | 1000 m / 600 m           |
| Serial 10 Gigabit Ethernet              | 550 m / -                |
| Minimum Effective Modal Bandwidth (EMB) | 4700 MHz*km / -          |
| Min. Overfilled Launch (OFL) Bandwidth  | 3500 MHz*km / 500 MHz*km |

**EDGE™ Armored Trunk 50 µm multimode (OM4),  
MTP® (non-pinned) to MTP (non-pinned) 36 F, with  
33/33 in legs, pulling grip one side, 100 ft**

CORNING

**Dimensions**

|        |        |
|--------|--------|
| Length | 100 ft |
|--------|--------|

**Cable Material**

|                 |              |
|-----------------|--------------|
| Fiber Count     | 36           |
| Fiber Type      | OM4 MM       |
| Outer Diameter  | Standard     |
| Flame Rating    | Plenum       |
| Aarmor          | Armored      |
| Length          | 100          |
| Unit of Measure | Feet         |
| Cable Type      | Distribution |
| Fiber Mode      | Multimode    |

**CONNECTOR\_A\_1 Material**

|                   |                     |
|-------------------|---------------------|
| Connector         | MTP® 12F Non-pinned |
| Connector Keying  | Non-Keyed           |
| Connector Loss    | Low Loss            |
| Connector Pinning | Non-Pinned          |

**CONNECTOR\_B Material**

|                   |                     |
|-------------------|---------------------|
| Connector         | MTP® 12F Non-pinned |
| Connector Keying  | Non-Keyed           |
| Connector Pinning | Non-Pinned          |
| Connector Loss    | Low Loss            |

**Furcation A Material**

|            |       |
|------------|-------|
| Leg Length | 33 in |
|------------|-------|

**EDGE™ Armored Trunk 50 μm multimode (OM4),  
MTP® (non-pinned) to MTP (non-pinned) 36 F, with  
33/33 in legs, pulling grip one side, 100 ft**



| Furcation B Material |       |
|----------------------|-------|
| Leg Length           | 33 in |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.