

# EDGE™ MTP® Extender Trunk 12F, Bend-Improved single-mode (OS2), 100 ft

CORNING

**Part Number:**  
**G899012GPNCDX100F**

The EDGE™ MTP® Extender Trunks provide additional distance for the backbone of the EDGE Solution. With a non-pinned MTP on one end of the cable, a pinned MTP on the other and a TIA-568 Type-A polarity, these trunks are designed to interface with a EDGE or Plug & Play™ module and an MTP trunk. All trunks are shipped with strain-relief clips that allow for the tool-less installation in both EDGE and Plug & Play housings. Most often these extender trunks will be used in a Zone Distribution Area (ZDA).

## Features and Benefits

### **Snap-in strain-relief clips**

Provide easier cable management

### **Small outer diameter**

Improves cable tray fill ratio and allows for imported airflow

### **Low-loss connectivity**


Enables system design flexibility

### **Bend-improved fiber**

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

### **Corning® CleanAdvantage™ technology and optimized dust cap**

Eliminates the need for scoping and cleaning prior to initial field connection

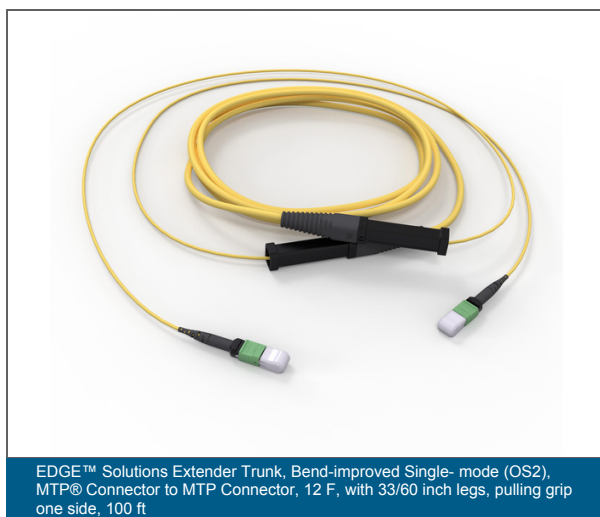

# EDGE™ MTP® Extender Trunk 12F, Bend-Improved single-mode (OS2), 100 ft

CORNING

## Specifications

### General Specifications

|                         |                            |
|-------------------------|----------------------------|
| Flame Rating            | Plenum (OFNP)              |
| Fiber Category          | Bend-improved SM (OS2)     |
| Cable Assembly Type     | EDGE™ Trunk                |
| Environment             | Indoor                     |
| Cable Type              | Indoor: ANSI/ICEA S-83-596 |
| Pulling grip            | Yes                        |
| Connector Assembly Type | MTP to MTP                 |

### Standards

|                        |                                                            |
|------------------------|------------------------------------------------------------|
| Fiber Standards        | ITU-T G.652.D and ITU-T G.657.A1                           |
| RoHS                   | Free of hazardous substances according to RoHS 2011/65/EU  |
| Approvals and Listings | NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6 |

### Environmental Conditions

|                              |                                    |
|------------------------------|------------------------------------|
| Temperature Range, Operation | -10 °C to 60 °C (14 °F to 140 °F ) |
|------------------------------|------------------------------------|

### Design

|             |                          |
|-------------|--------------------------|
| Fiber Count | 12                       |
| Polarity    | Extender, TIA-568 Type-A |
| Fiber Type  | Single-mode              |

### Mechanical Specifications

|                                        |                   |
|----------------------------------------|-------------------|
| Nominal Outer Diameter                 | 5.5 mm (0.22 in ) |
| Max. Tensile Strength for Installation | 440 N (98.92 lbf) |
| Min. Bend Radius Installation          | 82.5 mm (3.25 in) |

# EDGE™ MTP® Extender Trunk 12F, Bend-Improved single-mode (OS2), 100 ft

CORNING

## Mechanical Specifications

|                                       |                   |
|---------------------------------------|-------------------|
| Min. Bend Radius Operation            | 27.5 mm (1.08 in) |
| Minimum Conduit Size with 18-in Elbow | 64 mm (2.52 in)   |

## Optical Characteristics

|                         |                                   |
|-------------------------|-----------------------------------|
| Fiber Code              | Z                                 |
| Performance Option Code | 01                                |
| Fiber Category          | OS2                               |
| Fiber Type              | Single-mode (OS2) / 250 µm        |
| Fiber Name              | Bend-Improved Single-mode (OS2)   |
| Maximum Attenuation     | 0.4 dB/km / 0.4 dB/km / 0.3 dB/km |
| Wavelengths             | 1310 nm / 1383 nm / 1550 nm       |
| Fiber Compliance        | ITU-T G.652.D and ITU-T G.657.A1  |

## Specifications - Connector A

|                      |               |
|----------------------|---------------|
| Insertion Loss, Max. | 0.35 dB       |
| Boot Color           | Black         |
| Connector Type       | MTP® (pinned) |
| Ferrule Material     | Composite     |
| Reflectance          | < -65 dB      |

## Specifications - Connector B

|                      |                   |
|----------------------|-------------------|
| Insertion Loss, Max. | 0.35 dB           |
| Boot Color           | Black             |
| Connector Type       | MTP® (non-pinned) |
| Ferrule Material     | Composite         |
| Reflectance          | < -65 dB          |

# EDGE™ MTP® Extender Trunk 12F, Bend-Improved single-mode (OS2), 100 ft

CORNING

## Pulling Grip - Connector A

|                     |                   |
|---------------------|-------------------|
| Pulling grip        | Yes               |
| Tensile Strength    | 440 N (98.92 lbf) |
| Grip Outer Diameter | 41 mm (1.61 in)   |

## Pulling Grip - Connector B

|                         |                 |
|-------------------------|-----------------|
| Min. Duct Size Diameter | 64 mm (2.52 in) |
|-------------------------|-----------------|

## Dimensions

|              |                            |
|--------------|----------------------------|
| Length       | 100 ft                     |
| Cable Weight | 32 kg/km (21.5 lb/1000 ft) |

## Ordering Information

|                    |                   |
|--------------------|-------------------|
| Product Number     | G899012GPNCDX100F |
| Packaging Method   | Plastic reel      |
| Reel Diameter      | 23.5 in           |
| Reel Width         | 5 in              |
| Units per Delivery | 1/1               |

## Furcation - Connector A

|                |                                            |
|----------------|--------------------------------------------|
| Leg Length     | 1524 mm -0 / +76mm (60 in -0 / +2.99in)    |
| Furcation Type | EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm |
| Leg Color      | Yellow                                     |
| Leg Diameter   | 2 mm (0.08 in)                             |
| Leg Count      | 1                                          |

# EDGE™ MTP® Extender Trunk 12F, Bend-Improved single-mode (OS2), 100 ft

CORNING

## Furcation - Connector B

|                |                                            |
|----------------|--------------------------------------------|
| Leg Color      | Yellow                                     |
| Furcation Type | EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm |
| Leg Diameter   | 2 mm (0.08 in)                             |
| Leg Length     | 838 mm -0 / +76mm (32.99 in -0 / +2.99in)  |
| Leg Count      | 1                                          |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.