

EDGE™ MTP® Extender Trunk 24F, 50 µm multimode (OM3), 100 ft

CORNING

Part Number:
G937524TPNCDX100F

The EDGE™ MTP® Extender Trunks provide additional distance for the backbone of the EDGE Solution. With a non-pinned MTP on one end of the cable, a pinned MTP on the other and a TIA-568 Type-A polarity, these trunks are designed to interface with a EDGE or Plug & Play™ module and an MTP trunk. All trunks are shipped with strain-relief clips that allow for the tool-less installation in both EDGE and Plug & Play housings. Most often these extender trunks will be used in a Zone Distribution Area (ZDA).

Features and Benefits

Snap-in strain-relief clips

Provide easier cable management

Small outer diameter

Improves cable tray fill ratio and allows for imported airflow

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

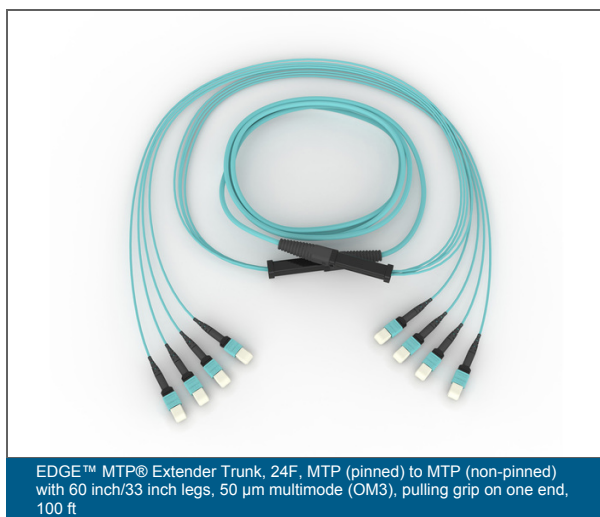

EDGE™ MTP® Extender Trunk, 24F, MTP (pinned) to MTP (non-pinned) with 60 inch/33 inch legs, 50 µm multimode (OM3), pulling grip on one end, 100 ft

EDGE™ MTP® Extender Trunk 24F, 50 µm multimode (OM3), 100 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM3)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Cable Type	Indoor: ANSI/ICEA S-83-596
Pulling grip	Yes
Connector Assembly Type	MTP to MTP

Standards

Fiber Standards	IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAC-A (OM3); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM3
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	24
Polarity	Extender, TIA-568 Type-A
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	7.7 mm (0.3 in)
Max. Tensile Strength for Installation	660 N (148.37 lbf)

EDGE™ MTP® Extender Trunk 24F, 50 µm multimode (OM3), 100 ft

CORNING

Mechanical Specifications

Min. Bend Radius Installation	115.5 mm (4.55 in)
Min. Bend Radius Operation	38.5 mm (1.52 in)
Minimum Conduit Size with 18-in Elbow	64 mm (2.52 in)

Optical Characteristics

Fiber Code	T
Performance Option Code	80
Fiber Category	OM3
Fiber Type	Multimode
Fiber Name	50 µm MM (OM3)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	300 m / -
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® (pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

Specifications - Connector B

Insertion Loss, Max.	0.25 dB
----------------------	---------

EDGE™ MTP® Extender Trunk 24F, 50 µm multimode (OM3), 100 ft

CORNING

Specifications - Connector B

Boot Color	Black
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

Pulling Grip - Connector A

Pulling grip	Yes
Tensile Strength	440 N (98.92 lbf)
Grip Outer Diameter	41 mm (1.61 in)

Pulling Grip - Connector B

Min. Duct Size Diameter	64 mm (2.52 in)
-------------------------	-----------------

Dimensions

Length	100 ft
Cable Weight	50 kg/km (33.6 lb/1000 ft)

Ordering Information

Product Number	G937524TPNCDX100F
Packaging Method	Plastic reel
Reel Diameter	23.5 in
Reel Width	5 in
Units per Delivery	1/1

Furcation - Connector A

Leg Length	1524 mm -0 / +76mm (60 in -0 / +2.99in)
------------	---

EDGE™ MTP® Extender Trunk 24F, 50 µm multimode (OM3), 100 ft

CORNING

Furcation - Connector A

Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)
Leg Count	2

Furcation - Connector B

Leg Color	Aqua
Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Diameter	2 mm (0.08 in)
Leg Length	838 mm -0 / +76mm (32.99 in -0 / +2.99in)
Leg Count	2



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.