

EDGE™ Non-Staggered MTP to LC Harness 12F, Bend-improved Single-mode (OS2), MTP PRO to LC Uniboot, 10 ft

CORNING

Part Number:
H907812GPH-RB010F

EDGE™ MTP® to LC uniboot nonstaggered harnesses provide breakout from 12-fiber MTP PRO connectors to LC uniboot connectors. These harnesses come with nonstaggered legs in several length options.

The EDGE module harness is designed to create a cross-connect point near the electronics by enabling port replication. This harness uses LC uniboot connectors to interface with the electronics and a non-pinned MTP PRO connector to connect into the back of a module. This solution can be used in a horizontal distribution area (HDA).

The EDGE trunk harness is designed to facilitate an interconnect point when the electronics are located in a separate area than the cross-connect or patching field. This harness uses LC uniboot connectors to interface with the electronics and a pinned MTP PRO connector to connect into a trunk. This solution can be used in an equipment distribution area (EDA).

Features and Benefits

Slim round 2-fiber interconnect cable

Improves airflow and reduces congestion

MTP® PRO connectors

Allows for pinning and polarity changes in the field

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

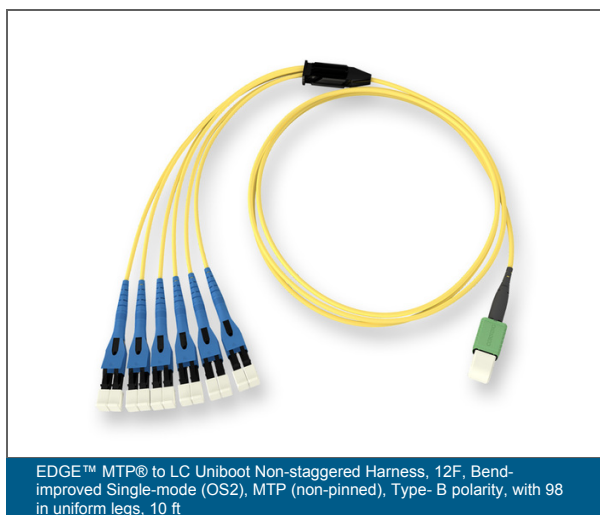

EDGE™ MTP® to LC Uniboot Non-staggered Harness, 12F, Bend-improved Single-mode (OS2), MTP (non-pinned), Type- B polarity, with 98 in uniform legs, 10 ft

EDGE™ Non-Staggered MTP to LC Harness 12F, Bend-improved Single-mode (OS2), MTP PRO to LC Uniboot, 10 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	Bend-improved SM (OS2)
Cable Assembly Type	EDGE™ Harness
Environment	Indoor
Cable Type	Indoor: ANSI/ICEA S-83-596
Connector Assembly Type	MTP to LC

Standards

Fiber Standards	ITU-T G.652.D and ITU-T G.657.A1
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)

Design

Fiber Count	12
Polarity	Type-B with Universal LCs
Fiber Type	Single-mode

Mechanical Specifications

Nominal Outer Diameter	2 mm (0.08 in)
Max. Tensile Strength for Installation	220 N (49.46 lbf)
Min. Bend Radius Installation	44 mm (1.73 in)

EDGE™ Non-Staggered MTP to LC Harness 12F, Bend-improved Single-mode (OS2), MTP PRO to LC Uniboot, 10 ft

CORNING

Mechanical Specifications

Min. Bend Radius Operation	15 mm (0.59 in)
----------------------------	-----------------

Optical Characteristics

Fiber Code	Z
Performance Option Code	31
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.4 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1

Specifications - Connector A

Insertion Loss, Max.	0.35 dB
Boot Color	Black
Connector Type	MTP® PRO (non-pinned)
Ferrule Material	Composite
Reflectance	< -65 dB

Specifications - Connector B

Insertion Loss, Max.	0.25 dB
Boot Color	Blue
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -55 dB

EDGE™ Non-Staggered MTP to LC Harness 12F, Bend-improved Single-mode (OS2), MTP PRO to LC Uniboot, 10 ft

CORNING

Dimensions

Length	10 ft -0 / +0.04m
Cable Weight	20 kg/km (13.44 lb/1000 ft)

Ordering Information

Product Number	H907812GPH-RB010F
Units per Delivery	1/1

Cable Material

Fiber Count	12
Fiber Type	OS2 Bend-improved SM
Outer Diameter	Standard
Flame Rating	Plenum
Aarmor	Non-armored
Length	10
Unit of Measure	Feet
Cable Type	Interconnect
Fiber Mode	Single-Mode

CONNECTOR_A_1 Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Loss	Standard Loss
Connector Pinning	Non-Pinned

CONNECTOR_B Material

Connector	LC UPC Uniboot
Connector Pairing	Duplex

EDGE™ Non-Staggered MTP to LC Harness 12F, Bend-improved Single-mode (OS2), MTP PRO to LC Uniboot, 10 ft

CORNING

CONNECTOR_B Material

Connector Keying	Non-Keyed
------------------	-----------

Furcation A Material

Leg Length	None
Leg Length non-unit	Non-staggered (2500 mm/98 in)
Furcation Type	EDGE™ Harness Plug
Leg Color	Yellow
Leg Diameter	2 mm (0.08 in)

Furcation - Connector B

Leg Color	Yellow
Furcation Type	EDGE™ Harness Plug
Leg Diameter	2 mm (0.08 in)
Leg Length	2489.2 mm (98 in)
Leg Length non-unit	Non-staggered (2500 mm/98 in)
Leg Count	6
Leg Length	98 in



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.