

EDGE™ Non-Staggered MTP to LC Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft

CORNING

Part Number:
H937912QPH-NA010F

EDGE™ MTP® to LC uniboot nonstaggered harnesses provide breakout from 12-fiber MTP PRO connectors to LC uniboot connectors. These harnesses come with nonstaggered legs in several length options.

The EDGE module harness is designed to create a cross-connect point near the electronics by enabling port replication. This harness uses LC uniboot connectors to interface with the electronics and a non-pinned MTP PRO connector to connect into the back of a module. This solution can be used in a horizontal distribution area (HDA).

The EDGE trunk harness is designed to facilitate an interconnect point when the electronics are located in a separate area than the cross-connect or patching field. This harness uses LC uniboot connectors to interface with the electronics and a pinned MTP PRO connector to connect into a trunk. This solution can be used in an equipment distribution area (EDA).

Features and Benefits

Slim round 2-fiber interconnect cable

Improves airflow and reduces congestion

MTP® PRO connectors

Allows for pinning and polarity changes in the field

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

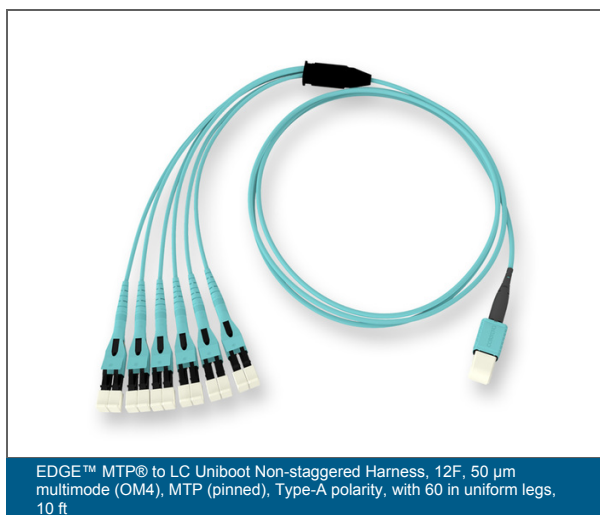

EDGE™ MTP® to LC Uniboot Non-staggered Harness, 12F, 50 µm multimode (OM4), MTP (pinned), Type-A polarity, with 60 in uniform legs, 10 ft

EDGE™ Non-Staggered MTP to LC Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM4)
Cable Assembly Type	EDGE™ Harness
Environment	Indoor
Application	Data Center, High-density Field Switches
Cable Type	Indoor: ANSI/ICEA S-83-596
Connector Assembly Type	MTP to LC

Standards

Fiber Standards	IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAD (OM4); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM4
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)

Design

Fiber Count	12
Polarity	Type-A with Universal LCs
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	2 mm (0.08 in)
------------------------	-----------------

EDGE™ Non-Staggered MTP to LC Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft

CORNING

Mechanical Specifications

Max. Tensile Strength for Installation	220 N (49.46 lbf)
Min. Bend Radius Installation	44 mm (1.73 in)
Min. Bend Radius Operation	15 mm (0.59 in)

Optical Characteristics

Fiber Code	T
Performance Option Code	90
Fiber Category	OM4
Fiber Type	Multimode
Fiber Name	50 µm MM (OM4)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® PRO (pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

Specifications - Connector B

Insertion Loss, Max.	0.1 dB
----------------------	--------

EDGE™ Non-Staggered MTP to LC Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft

CORNING

Specifications - Connector B

Boot Color	Aqua
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -20 dB

Dimensions

Length	10 ft -0 / +0.04m
Cable Weight	20 kg/km (13.44 lb/1000 ft)

Ordering Information

Product Number	H937912QPH-NA010F
Units per Delivery	1/1

Furcation - Connector A

Leg Length non-unit	Non-staggered (1500 mm/60 in)
Furcation Type	EDGE™ Harness Plug
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)

Furcation - Connector B

Leg Color	Aqua
Furcation Type	EDGE™ Harness Plug
Leg Diameter	2 mm (0.08 in)
Leg Length	1524 mm (60 in)
Leg Length non-unit	Non-staggered (1500 mm/60 in)
Leg Count	6

EDGE™ Non-Staggered MTP to LC Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft

The Corning logo consists of a solid blue square. Inside the square, the word "CORNING" is written in a white, serif, all-caps font, centered horizontally and vertically.

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.