

# EDGE™ Staggered Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

**Part Number:**  
**H937912QPH-2A010F**

EDGE™ MTP® to LC uniboot staggered harnesses provide breakout from 12-fiber MTP PRO connectors to LC uniboot connectors. These harnesses are available in five stagger configurations to meet various port-replication needs. Stagger options replicate the specific switch ports to save on excess cable length. The EDGE module harness is designed to create a crossconnect point near the electronics by enabling port replication. This harness uses LC uniboot connectors to interface with the electronics and a non-pinned MTP PRO connector to connect into the back of a module. With port replication, the installation will look the same even after multiple moves, adds, and changes (MACs). This solution can be used in a horizontal distribution area (HDA). The EDGE trunk harness is designed to facilitate an interconnect point when the electronics are located in a separate area than the cross-connect or patching field. This harness uses LC uniboot connectors to interface with the electronics and a pinned MTP PRO connector to connect into a trunk. This solution can be used in an equipment distribution area (EDA).

## Features and Benefits

### **Slim round 2-fiber interconnect cable**

Improves airflow and reduces congestion

### **MTP® PRO connectors**

Allows for pinning and polarity changes in the field

### **Low-loss connectivity**


Enables system design flexibility

### **Bend-improved fiber**

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

### **Corning® CleanAdvantage™ technology and optimized dust cap**

Eliminates the need for scoping and cleaning prior to initial field connection

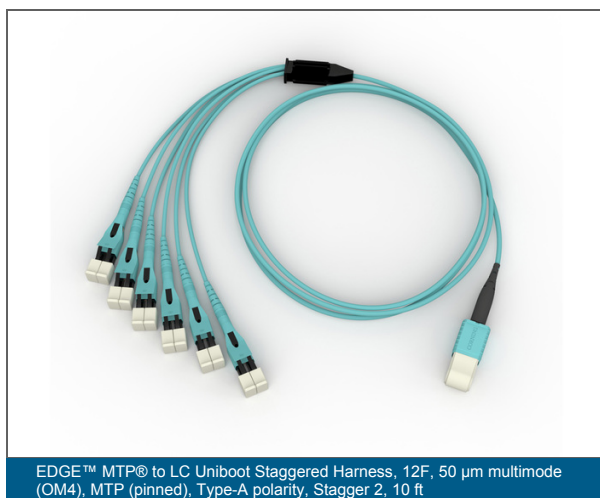

EDGE™ MTP® to LC Uniboot Staggered Harness, 12F, 50 µm multimode (OM4), MTP (pinned), Type-A polarity, Stagger 2, 10 ft

# EDGE™ Staggered Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

## Specifications

### General Specifications

|                         |                                          |
|-------------------------|------------------------------------------|
| Flame Rating            | Plenum (OFNP)                            |
| Fiber Category          | 50 µm MM (OM4)                           |
| Cable Assembly Type     | EDGE™ Harness                            |
| Environment             | Indoor                                   |
| Application             | Data Center, High-density Field Switches |
| Cable Type              | Indoor: ANSI/ICEA S-83-596               |
| Connector Assembly Type | MTP to LC                                |

### Standards

|                        |                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Fiber Standards        | IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAD (OM4); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM4 |
| RoHS                   | Free of hazardous substances according to RoHS 2011/65/EU                                                                               |
| Approvals and Listings | NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6                                                                              |

### Environmental Conditions

|                                 |                                    |
|---------------------------------|------------------------------------|
| Temperature Range, Installation | 0 °C to 50 °C (32 °F to 122 °F )   |
| Temperature Range, Operation    | -10 °C to 60 °C (14 °F to 140 °F ) |

### Design

|             |                           |
|-------------|---------------------------|
| Fiber Count | 12                        |
| Polarity    | Type-A with Universal LCs |
| Fiber Type  | Multimode                 |

### Mechanical Specifications

|                        |                   |
|------------------------|-------------------|
| Nominal Outer Diameter | 2.9 mm (0.11 in ) |
|------------------------|-------------------|

# EDGE™ Staggered Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

## Mechanical Specifications

|                                        |                   |
|----------------------------------------|-------------------|
| Max. Tensile Strength for Installation | 220 N (49.46 lbf) |
| Min. Bend Radius Installation          | 44 mm (1.73 in)   |
| Min. Bend Radius Operation             | 15 mm (0.59 in)   |

## Optical Characteristics

|                                         |                          |
|-----------------------------------------|--------------------------|
| Fiber Code                              | T                        |
| Performance Option Code                 | 90                       |
| Fiber Category                          | OM4                      |
| Fiber Type                              | Multimode                |
| Fiber Name                              | 50 µm MM (OM4)           |
| Maximum Attenuation                     | 2.8 dB/km / 1.0 dB/km    |
| Wavelengths                             | 850 nm / 1300 nm         |
| Fiber Compliance                        | IEC 60793-2-10           |
| Fiber Core Diameter                     | 50 µm                    |
| Serial 1 Gigabit Ethernet               | 1000 m / 600 m           |
| Serial 10 Gigabit Ethernet              | 550 m / -                |
| Minimum Effective Modal Bandwidth (EMB) | 4700 MHz*km / -          |
| Min. Overfilled Launch (OFL) Bandwidth  | 3500 MHz*km / 500 MHz*km |

## Specifications - Connector A

|                      |                   |
|----------------------|-------------------|
| Insertion Loss, Max. | 0.25 dB           |
| Boot Color           | Black             |
| Connector Type       | MTP® PRO (pinned) |
| Ferrule Material     | Composite         |
| Reflectance          | < -20 dB          |

## Specifications - Connector B

|                      |        |
|----------------------|--------|
| Insertion Loss, Max. | 0.1 dB |
|----------------------|--------|

# EDGE™ Staggered Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

## Specifications - Connector B

|                  |            |
|------------------|------------|
| Boot Color       | Aqua       |
| Connector Type   | LC Uniboot |
| Ferrule Material | Ceramic    |
| Reflectance      | < -20 dB   |

## Dimensions

|              |                             |
|--------------|-----------------------------|
| Length       | 10 ft -0 / +0.04m           |
| Cable Weight | 20 kg/km (13.44 lb/1000 ft) |

## Ordering Information

|                    |                   |
|--------------------|-------------------|
| Product Number     | H937912QPH-2A010F |
| Units per Delivery | 1/1               |

## Furcation - Connector A

|                     |                    |
|---------------------|--------------------|
| Leg Length non-unit | Stagger 2          |
| Furcation Type      | EDGE™ Harness Plug |
| Leg Color           | Aqua               |
| Leg Diameter        | 2 mm (0.08 in)     |

## Furcation - Connector B

|                     |                    |
|---------------------|--------------------|
| Leg Color           | Aqua               |
| Furcation Type      | EDGE™ Harness Plug |
| Leg Diameter        | 2 mm (0.08 in)     |
| Leg Length non-unit | Stagger 2          |
| Leg Count           | 6                  |

# EDGE™ Staggered Harness 12F, 50 µm multimode (OM4), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.