

EDGE™ Staggered Harness 12F, 50 µm multimode (OM3), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

Part Number:
H937912TPH-2A010F

EDGE™ MTP® to LC uniboot staggered harnesses provide breakout from 12-fiber MTP PRO connectors to LC uniboot connectors. These harnesses are available in five stagger configurations to meet various port-replication needs. Stagger options replicate the specific switch ports to save on excess cable length. The EDGE module harness is designed to create a crossconnect point near the electronics by enabling port replication. This harness uses LC uniboot connectors to interface with the electronics and a non-pinned MTP PRO connector to connect into the back of a module. With port replication, the installation will look the same even after multiple moves, adds, and changes (MACs). This solution can be used in a horizontal distribution area (HDA). The EDGE trunk harness is designed to facilitate an interconnect point when the electronics are located in a separate area than the cross-connect or patching field. This harness uses LC uniboot connectors to interface with the electronics and a pinned MTP PRO connector to connect into a trunk. This solution can be used in an equipment distribution area (EDA).

Features and Benefits

Slim round 2-fiber interconnect cable

Improves airflow and reduces congestion

MTP® PRO connectors

Allows for pinning and polarity changes in the field

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

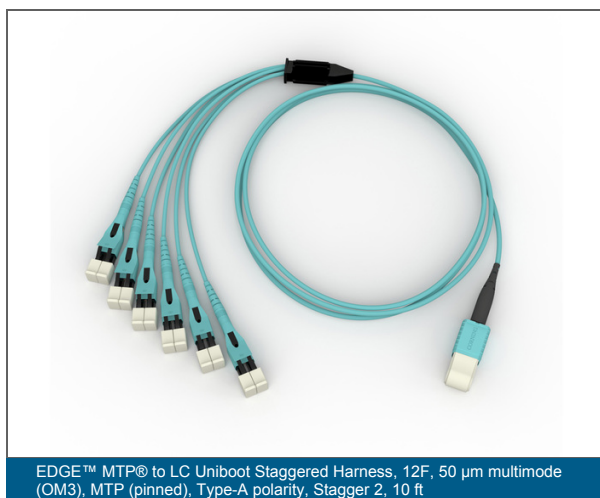

EDGE™ MTP® to LC Uniboot Staggered Harness, 12F, 50 µm multimode (OM3), MTP (pinned), Type-A polarity, Stagger 2, 10 ft

EDGE™ Staggered Harness 12F, 50 µm multimode (OM3), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM3)
Cable Assembly Type	EDGE™ Harness
Environment	Indoor
Application	Data Center, High-density Field Switches
Cable Type	Indoor: ANSI/ICEA S-83-596
Connector Assembly Type	MTP to LC

Standards

Fiber Standards	IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAC-A (OM3); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM3
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)

Design

Fiber Count	12
Polarity	Type-A with Universal LCs
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	2.9 mm (0.11 in)
------------------------	-------------------

EDGE™ Staggered Harness 12F, 50 µm multimode (OM3), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

Mechanical Specifications

Max. Tensile Strength for Installation	220 N (49.46 lbf)
Min. Bend Radius Installation	44 mm (1.73 in)
Min. Bend Radius Operation	15 mm (0.59 in)

Optical Characteristics

Fiber Code	T
Performance Option Code	80
Fiber Category	OM3
Fiber Type	Multimode
Fiber Name	50 µm MM (OM3)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	300 m / -
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® PRO (pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

Specifications - Connector B

Insertion Loss, Max.	0.1 dB
----------------------	--------

EDGE™ Staggered Harness 12F, 50 µm multimode (OM3), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

Specifications - Connector B

Boot Color	Aqua
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -20 dB

Dimensions

Length	10 ft -0 / +0.04m
Cable Weight	20 kg/km (13.44 lb/1000 ft)

Ordering Information

Product Number	H937912TPH-2A010F
Units per Delivery	1/1

Cable Material

Fiber Count	12
Fiber Type	OM3 MM
Outer Diameter	Standard
Flame Rating	Plenum
Aarmor	Non-armored
Length	10
Unit of Measure	Feet
Cable Type	Interconnect
Fiber Mode	Multimode

CONNECTOR_A_1 Material

Connector	MTP® 12F Pinned
Connector Keying	Non-Keyed

EDGE™ Staggered Harness 12F, 50 µm multimode (OM3), MTP PRO to LC Uniboot, 10 ft, Stagger 2

CORNING

CONNECTOR_A_1 Material

Connector Loss	Low Loss
Connector Pinning	Pinned

CONNECTOR_B Material

Connector	LC PC Uniboot
Connector Pairing	Duplex
Connector Keying	Non-Keyed

Furcation A Material

Leg Length	None
Leg Length non-unit	Stagger 2
Furcation Type	EDGE™ Harness Plug
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)

Furcation - Connector B

Leg Color	Aqua
Furcation Type	EDGE™ Harness Plug
Leg Diameter	2 mm (0.08 in)
Leg Length non-unit	Stagger 2
Leg Count	6
Leg Length	Stagger 2



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.