

EDGE™ Staggered Harness 8F, Bend-improved Single-mode (OS2), MTP® PRO (pinned), Plenum, TIA-568 Type-B polarity, with 60 in legs, 10 ft

CORNING

Part Number:
HE77808GLZ-NB003M

EDGE™ MTP® to LC uniboot staggered harnesses provide breakout from 12-fiber MTP PRO connectors to LC uniboot connectors. These harnesses are available in five stagger configurations to meet various port-replication needs. Stagger options replicate the specific switch ports to save on excess cable length. The EDGE module harness is designed to create a crossconnect point near the electronics by enabling port replication. This harness uses LC uniboot connectors to interface with the electronics and a non-pinned MTP PRO connector to connect into the back of a module. With port replication, the installation will look the same even after multiple moves, adds, and changes (MACs). This solution can be used in a horizontal distribution area (HDA). The EDGE trunk harness is designed to facilitate an interconnect point when the electronics are located in a separate area than the cross-connect or patching field. This harness uses LC uniboot connectors to interface with the electronics and a pinned MTP PRO connector to connect into a trunk. This solution can be used in an equipment distribution area (EDA).

Features and Benefits

Slim round 2-fiber interconnect cable

Improves airflow and reduces congestion

MTP® PRO connectors

Allows for pinning and polarity changes in the field

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

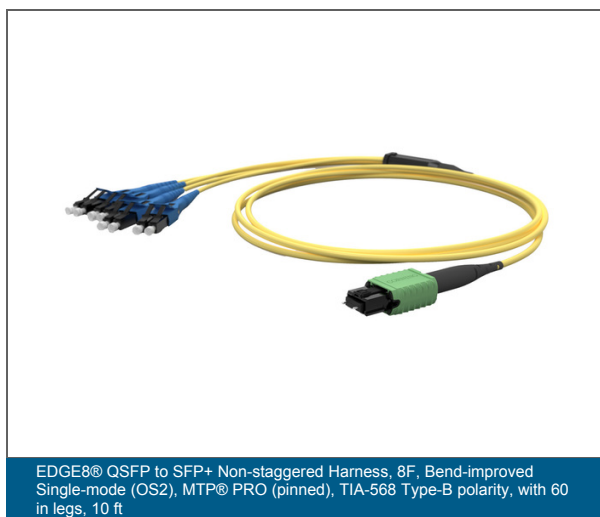

EDGE8® QSFP to SFP+ Non-staggered Harness, 8F, Bend-improved Single-mode (OS2), MTP® PRO (pinned), TIA-568 Type-B polarity, with 60 in legs, 10 ft

EDGE™ Staggered Harness 8F, Bend-improved Single-mode (OS2), MTP® PRO (pinned), Plenum, TIA-568 Type-B polarity, with 60 in legs, 10 ft

CORNING

Specifications

General Specifications

Flame Rating	LSZH/FRNC
Fiber Category	Bend-improved SM (OS2)
Cable Assembly Type	EDGE8® Harness
Application	Data Center, High-density Field Switches
Cable Type	Interconnect

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Intermateability	TIA/EIA-604-5 / TIA/EIA-604-5

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-10 °C to -60 °C (14 °F to -76 °F)

Design

Fiber Count	8
Polarity	TIA-568 Type-B

Mechanical Specifications

Nominal Outer Diameter	2 mm (0.08 in)
Max. Tensile Strength for Installation	220 N (49.46 lbf)
Min. Bend Radius Installation	30 mm (1.18 in)
Min. Bend Radius Operation	10 mm (0.39 in)

EDGE™ Staggered Harness 8F, Bend-improved Single-mode (OS2), MTP® PRO (pinned), Plenum, TIA-568 Type-B polarity, with 60 in legs, 10 ft

CORNING

Optical Characteristics	
Fiber Code	Z
Performance Option Code	20
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.20 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Core Diameter	8.2 µm
Cladding diameter	125 µm
Coating diameter	242 µm
Dispersion @ 1550 nm	≤ 18 [ps/(nm*km)]
Dispersion @ 1625 nm	≤ 22 [ps/(nm*km)]
Cable cutoff wavelength	1260 nm
Mode-Field Diameter at 1310 nm	9.2 µm
Mode-Field Diameter at 1550 nm	10.4 µm
PMD Link Design Value	≤ 0.04 ps/√km
PMD maximum individual fiber	≤ 0.1 ps/√km

Specifications - Connector A	
Polish	APC
Insertion Loss, Max.	0.35 dB
Boot Color	Black
Connector Type	MTP® PRO (pinned)
Ferrule Material	Composite
Boot Type	Simplex
Reflectance	< -55 dB

EDGE™ Staggered Harness 8F, Bend-improved Single-mode (OS2), MTP® PRO (pinned), Plenum, TIA-568 Type-B polarity, with 60 in legs, 10 ft

CORNING

Specifications - Connector B

Insertion Loss, Max.	0.25 dB
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -55 dB

Furcation - Connector A

Leg Length non-unit	Non-staggered (1500 mm/60 in)
Leg Length	609.6 mm (24 in)
Furcation Type	EDGE™ Harness Plug
Leg Color	Yellow
Leg Diameter	2 mm (0.08 in)

Furcation - Connector B

Leg Length non-unit	Non-staggered (1500 mm/60 in)
---------------------	-------------------------------

Dimensions

Length	3 m (9.84 ft)
Cable Weight	4.6 kg/km (3.09 lb/1000 ft)

Ordering Information

Product Number	HE77808GLZ-NB003M
Units per Delivery	1/1

EDGE™ Staggered Harness 8F, Bend-improved Single-mode (OS2), MTP® PRO (pinned), Plenum, TIA-568 Type-B polarity, with 60 in legs, 10 ft

The Corning logo consists of the word "CORNING" in a white, serif, all-caps font, centered within a solid blue square.

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.