

EDGE™ 4x4 Mesh Module 32F, MTP® to MTP, 50 µm multimode (OM4)

CORNING

Part Number:
EMM-MM32-9393Q

EDGE™ 4x4 Mesh Modules are used to break out the 40G SR4 ports to create a 10G fabric, eliminating the need to break the MTP® into LC connectivity. The mesh modules contain four 8-fiber MTP's in the rear for mating to backbone trunks and break out to four 8-fiber MTP's in the front for connectivity to the electronics. These modules allow customers to take advantage of higher port densities per switch with lower power consumption and a lower cost per 10G port, as well as improves their ability to create port diversification when using QSFP+ transceivers for 1-G applications.

Features and Benefits

Four 8-fiber MTP inputs shuffled to four 8-fiber MTP outputs


75% less rack space required

SR4 and PSM4 mesh without breaking connections out into LC connectivity


75% less congestion at MDA

Integrates into all EDGE housings

10% less insertion loss in link and 5% less cost to deploy than traditional breakout to LC connectivity

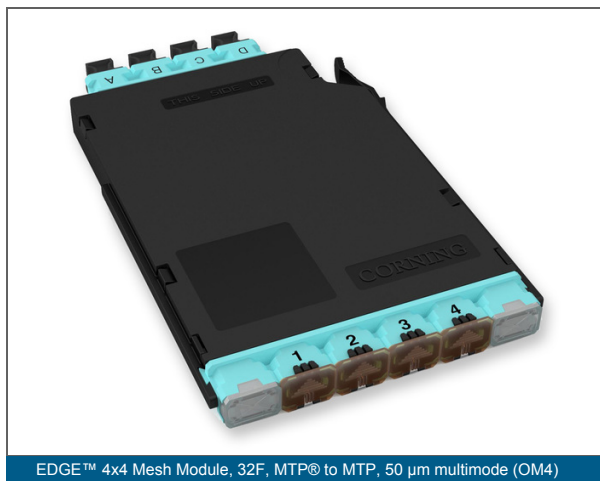

EDGE™ 4x4 Mesh Module, 32F, MTP® to MTP, 50 µm multimode (OM4)

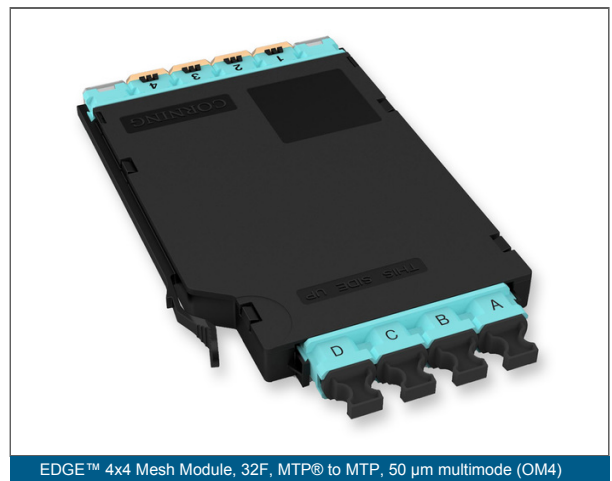

EDGE™ 4x4 Mesh Module, 32F, MTP® to MTP, 50 µm multimode (OM4)

EDGE™ 4x4 Mesh Module 32F, MTP® to MTP, 50 µm multimode (OM4)

CORNING

Specifications

General Specifications

Product Type	Panels and Modules
Fiber Category	Bend-improved 50 µm MM (OM4)
Application	Data Center

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	32
Adapter Type Back	MTP®
Adapter Color Back	Aqua
Adapter Color Front	Aqua
Adapter Type Front	MTP®
Housing Type	Modules
Panel or Module Type	EDGE
Number of Adapters per Panel	4

Cable Design

Fiber Count	32
Polarity	Universal, TIA-568 Type-B

Optical Specification - Hardware

Module Insertion Loss, Max	0.5 dB
Wavelengths	850 nm / 1300 nm
Fiber Category	50 µm MM (OM4)

EDGE™ 4x4 Mesh Module 32F, MTP® to MTP, 50 µm multimode (OM4)

CORNING

Specifications - Connector A

Connector Type	MTP® (pinned)
Ferrule Material	Composite

Specifications - Connector B

Connector Type	MTP® (pinned)
Ferrule Material	Composite

Dimensions

Width	116 mm (4.57 in)
Depth	124 mm (4.88 in)

Ordering Information

Product Number	EMM-MM32-9393Q
Shipping Weight	0.91 kg
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.