

EDGE™ Conversion Modules 24F, MTP® (pinned) to MTP (pinned), 50 µm multimode (OM4)

CORNING

Part Number:
ECM-UM24-93-93Q

EDGE™ Solutions conversion modules have 12-fiber MTP® adapters in the rear for mating to backbone trunks and breakout to 8-fiber MTP adapters in the front for connectivity to electronics. The conversion modules fully utilize all fibers in each Base-12 set in the trunk by breaking out Base-12 MTP adapters at the rear of the module into a proportionate number of Base-8 MTP adapters at the front.

EDGE conversion modules are available in two configurations: 2x3 (two 12 F MTP adapters in the rear and three 8 F MTP adapters in the front) and 4x6 (four adapters in the rear and six in the front).

These modules come from the factory as a TIA-568 Type-B component. However, EDGE conversion modules also offer on-site MTP connectivity changes to manage field polarity. Every EDGE conversion module features translucent shuttered adapters that eliminate the need for separate dust caps.

Features and Benefits

VFL-compatible shuttered LC adapters

Creates one-hand operation and decreases time needed to test and troubleshoot a link

Rear-loading capability

Decreases the time to prepare and install modules into fiber housings

High density


Module enables 576 fibers in a 4U housing and 144 fibers in a 1U

Low insertion loss performance

Improved performance specs allow for more mated pairs and/or longer link distances

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

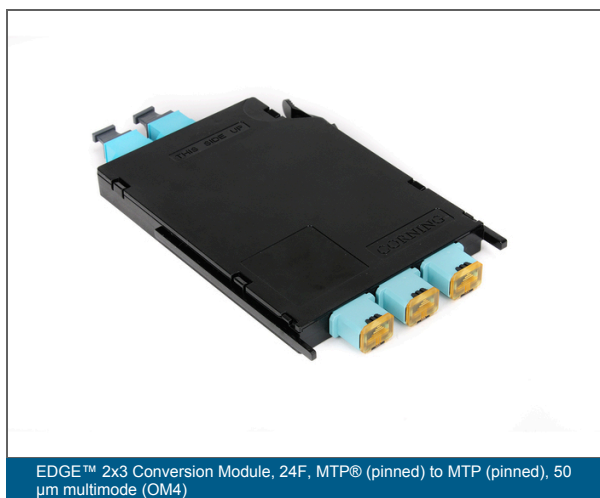

EDGE™ 2x3 Conversion Module, 24F, MTP® (pinned) to MTP (pinned), 50 µm multimode (OM4)

EDGE™ Conversion Modules 24F, MTP® (pinned) to MTP (pinned), 50 µm multimode (OM4)

CORNING

Specifications

General Specifications

Product Type	Panels and Modules
Fiber Category	50 µm MM (OM4)
Application	Data Center

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	24
Adapter Type Back	MTP®
Adapter Color Back	Aqua
Adapter Color Front	Aqua
Adapter Type Front	Shuttered MTP 3x8F
Housing Type	Panels and Modules
Number of Adapters per Panel	3

Cable Design

Polarity	TIA-568 Type-B
----------	----------------

Optical Specification - Hardware

Module Insertion Loss, Max	0.5 dB
Wavelengths	850 nm / 1300 nm

EDGE™ Conversion Modules 24F, MTP® (pinned) to MTP (pinned), 50 µm multimode (OM4)

CORNING

Optical Specification - Hardware

Fiber Category	50 µm MM (OM4)
----------------	----------------

Specifications - Connector A

Connector Type	MTP® (pinned)
Ferrule Material	Composite

Specifications - Connector B

Connector Type	MTP® (pinned)
Ferrule Material	Composite

Dimensions

Height	12 mm (0.47 in)
Width	90 mm (3.54 in)
Depth	144.3 mm (5.68 in)
Weight	11 kg

Ordering Information

Product Number	ECM-UM24-93-93Q
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.