


# EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM

CORNING

**Part Number:**  
**ECM-RM12-18-89G-ULL**

EDGE™ modules provide the interface between the MTP® connector on the trunk and the LC duplex patch cords that will then connect directly into the electronics or as a crossconnect in the main distribution area (MDA). These modules feature VFL-compatible LC shuttered adapters and are manufactured with Corning® CleanAdvantage™ Technology, an innovative factory cleaning and sealing process that minimizes debris transfer and allows you to connect with confidence.

The ultra-low-loss modules allow for extended-reach capabilities in high-speed serial duplex transmission. OM3/OM4/OM5 EDGE ultra-low-loss modules are specified to 0.35 dB compared to 0.5 dB for the low-loss EDGE module. The OS2 EDGE ultra-low-loss modules are specified to 0.60 dB compared to 1.0 dB for the standard EDGE module.

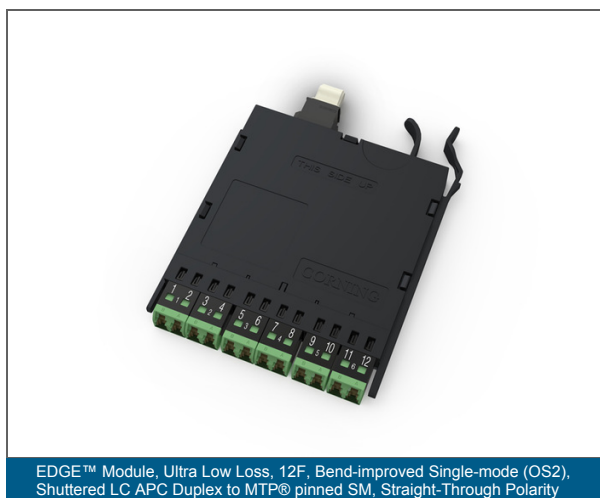

EDGE™ Module, Ultra Low Loss, 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM, Straight-Through Polarity

# EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM

CORNING

## Specifications

### General Specifications

|                |                        |
|----------------|------------------------|
| Product Type   | Modules                |
| Fiber Category | Bend-improved SM (OS2) |
| Mounting Type  | Rack-mount             |
| Application    | Data Center            |

### Standards

|      |                                                           |
|------|-----------------------------------------------------------|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|-----------------------------------------------------------|

### Design

|                     |                     |
|---------------------|---------------------|
| Fiber Count         | 12                  |
| Adapter Type Back   | MTP®                |
| Adapter Color Back  | Black               |
| Adapter Color Front | Green               |
| Adapter Type Front  | Shuttered LC Duplex |
| Housing Type        | Modules             |
| Product Family      | EDGE                |

### Cable Design

|          |                  |
|----------|------------------|
| Polarity | Straight through |
|----------|------------------|

### Optical Specification - Hardware

|                            |        |
|----------------------------|--------|
| Module Insertion Loss, Max | 0.6 dB |
|----------------------------|--------|

### Specifications - Connector A

|                |           |
|----------------|-----------|
| Connector Type | LC duplex |
|----------------|-----------|

# EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM

CORNING

## Specifications - Connector A

|                  |           |
|------------------|-----------|
| Polish           | APC       |
| Ferrule Material | Composite |
| Endface Type     | APC       |

## Specifications - Connector B

|                  |               |
|------------------|---------------|
| Connector Type   | MTP® (pinned) |
| Polish           | APC           |
| Ferrule Material | Ceramic       |

## Dimensions

|        |                  |
|--------|------------------|
| Width  | 95 mm (3.74 in)  |
| Depth  | 125 mm (4.92 in) |
| Weight | 6 kg             |

## Ordering Information

|                    |                          |
|--------------------|--------------------------|
| Product Number     | ECM-RM12-18-89G-ULL      |
| Packaging Method   | Individual Blister Packs |
| Units per Delivery | 1/1                      |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.