



EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM

CORNING

Part Number:
ECM-UM12-18-89G-ULL

EDGE™ modules provide the interface between the MTP® connector on the trunk and the LC duplex patch cords that will then connect directly into the electronics or as a crossconnect in the main distribution area (MDA). These modules feature VFL-compatible LC shuttered adapters and are manufactured with Corning® CleanAdvantage™ Technology, an innovative factory cleaning and sealing process that minimizes debris transfer and allows you to connect with confidence.

The ultra-low-loss modules allow for extended-reach capabilities in high-speed serial duplex transmission. OM3/OM4/OM5 EDGE ultra-low-loss modules are specified to 0.35 dB compared to 0.5 dB for the low-loss EDGE module. The OS2 EDGE ultra-low-loss modules are specified to 0.60 dB compared to 1.0 dB for the standard EDGE module.

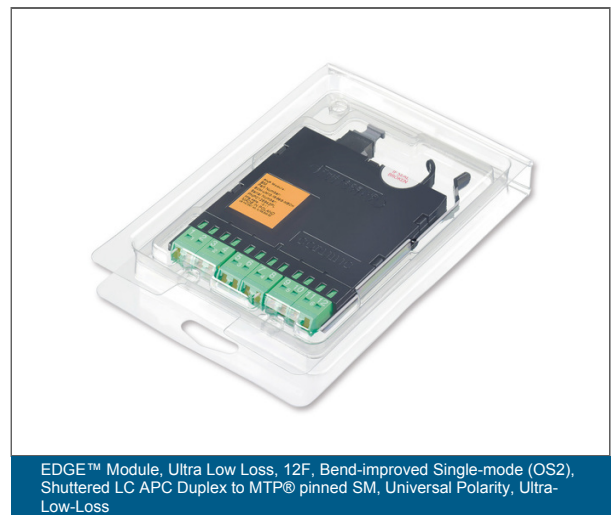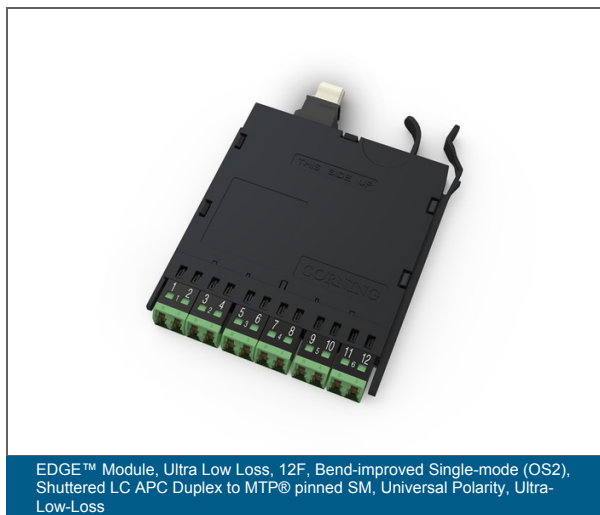

EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM



EDGE™ Module, Ultra Low Loss, 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM, Universal Polarity, Ultra-Low-Loss

Specifications

General Specifications	
Product Type	Modules
Fiber Category	Bend-improved SM (OS2)
Application	Data Center

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Design	
Fiber Count	12
Adapter Type Back	MTP®
Adapter Color Back	Black
Adapter Color Front	Green

EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM

CORNING

Design

Adapter Type Front	LC duplex
Housing Type	Modules
Panel or Module Type	EDGE
Product Family	EDGE

Cable Design

Polarity	Universal
----------	-----------

Design - Adapter

Adapter Style	Shuttered
---------------	-----------

Optical Specification - Hardware

Module Insertion Loss, Max	0.6 dB
Wavelengths	1310 nm / 1550 nm

Specifications - Connector A

Connector Type	LC duplex
Polish	APC
Ferrule Material	Composite
Endface Type	APC

Specifications - Connector B

Connector Type	MTP® (pinned)
Polish	APC
Ferrule Material	Ceramic
Endface Type	APC

EDGE™ Module, Ultra Low Loss 12F, Bend-improved Single-mode (OS2), Shuttered LC APC Duplex to MTP® pinned SM

CORNING

Dimensions

Width	101 mm (3.98 in)
Depth	125 mm (4.92 in)

Ordering Information

Product Number	ECM-UM12-18-89G-ULL
Packaging Method	Individual Blister Packs
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.