

# Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2)

CORNING

**Part Number:**  
**MAM-UM12-04N-89BG-FD**

The Secure Preterminated FTTD module provides the interface between the MTP® connectors on the trunk and the LC duplex jumpers that will provide individual user connectivity to the desk. The module fits into a standard opening in a metal floor box or wall-mount junction box. The module allows for the rapid deployment of FTTD solutions.

## Features and Benefits

### Shuttered adapters

Creates one-hand operation while eliminating the need to remove and store dust caps

### VFL-compatible shutters

Decreases time needed to test and troubleshoot a link

### MTP footprint


Reduces the labor and time to deploy the horizontal cabling in a FTTD installation

### Keyed offerings

Eliminates the risk of a user accessing a restricted network

### Two mounting options

Provides design flexibility for different FTTD applications

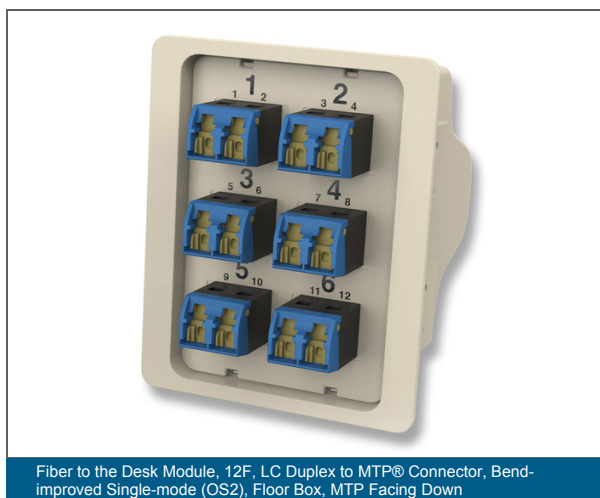

Fiber to the Desk Module, 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2), Floor Box, MTP Facing Down

# Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2)

CORNING

## Specifications

### General Specifications

|                |                        |
|----------------|------------------------|
| Product Type   | Modules                |
| Fiber Category | Bend-improved SM (OS2) |
| Mounting Type  | Rack-mount             |
| Application    | Fiber to the Premises  |

### Standards

|      |                                                           |
|------|-----------------------------------------------------------|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|-----------------------------------------------------------|

### Design

|                     |              |
|---------------------|--------------|
| Module Type         | Floorbox     |
| Fiber Count         | 12           |
| Adapter Type Back   | MTP®         |
| Adapter Color Back  | Black        |
| Adapter Color Front | Blue         |
| Adapter Type Front  | Shuttered LC |
| Number of Adapters  | 6            |

### Cable Design

|          |           |
|----------|-----------|
| Polarity | Universal |
|----------|-----------|

### Optical Specification - Hardware

|                            |                   |
|----------------------------|-------------------|
| Module Insertion Loss, Max | 1 dB              |
| Wavelengths                | 1310 nm / 1550 nm |

# Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2)

CORNING

## Specifications - Connector A

|                  |               |
|------------------|---------------|
| Connector Type   | MTP® (pinned) |
| Ferrule Material | Composite     |

## Specifications - Connector B

|                  |            |
|------------------|------------|
| Connector Type   | LC Uniboot |
| Ferrule Material | Ceramic    |

## Dimensions

|        |                 |
|--------|-----------------|
| Height | 78 mm (3.07 in) |
| Width  | 61 mm (2.4 in)  |
| Weight | 11 kg           |

## Ordering Information

|                    |                      |
|--------------------|----------------------|
| Product Number     | MAM-UM12-04N-89BG-FD |
| Units per Delivery | 1/1                  |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.