

Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2)

CORNING

Part Number:
MAM-UM12-04N-89BG-JD

The Secure Preterminated FTTD module provides the interface between the MTP® connectors on the trunk and the LC duplex jumpers that will provide individual user connectivity to the desk. The module fits into a standard opening in a metal floor box or wall-mount junction box. The module allows for the rapid deployment of FTTD solutions.

Features and Benefits

Shuttered adapters

Creates one-hand operation while eliminating the need to remove and store dust caps

VFL-compatible shutters

Decreases time needed to test and troubleshoot a link

MTP footprint


Reduces the labor and time to deploy the horizontal cabling in a FTTD installation

Keyed offerings

Eliminates the risk of a user accessing a restricted network

Two mounting options

Provides design flexibility for different FTTD applications

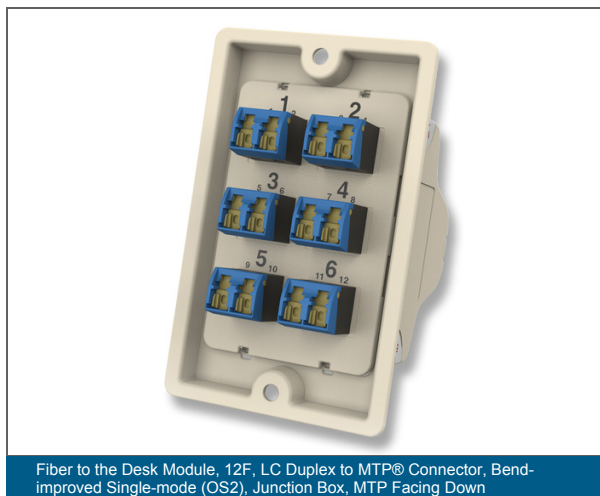

Fiber to the Desk Module, 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2), Junction Box, MTP Facing Down

Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2)

CORNING

Specifications

General Specifications

Product Type	Panels and Modules
Fiber Category	Bend-improved SM (OS2)
Application	Fiber to the Premises

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	12
Adapter Type Back	MTP®
Adapter Color Back	Black
Adapter Color Front	Blue
Adapter Type Front	Shuttered LC
Panel or Module Type	Junction Box, Wall-mount
Number of Adapters	6

Cable Design

Polarity	Universal
----------	-----------

Optical Specification - Hardware

Module Insertion Loss, Max	1 dB
Wavelengths	1310 nm / 1550 nm

Specifications - Connector A

Connector Type	MTP® (pinned)
----------------	---------------

Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, Bend-improved Single-mode (OS2)

CORNING

Specifications - Connector A

Ferrule Material	Composite
------------------	-----------

Specifications - Connector B

Connector Type	LC Uniboot
Ferrule Material	Ceramic

Dimensions

Height	94 mm (3.7 in)
Width	59 mm (2.32 in)

Ordering Information

Product Number	MAM-UM12-04N-89BG-JD
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.