

Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, 50 µm multimode (OM4)

CORNING

Part Number:
MAM-UM12-05A-93AQ-JD

The Secure Preterminated FTDD module provides the interface between the MTP® connectors on the trunk and the LC duplex jumpers that will provide individual user connectivity to the desk. The module fits into a standard opening in a metal floor box or wall-mount junction box. The module allows for the rapid deployment of FTDD solutions.

Features and Benefits

Shuttered adapters

Creates one-hand operation while eliminating the need to remove and store dust caps

VFL-compatible shutters

Decreases time needed to test and troubleshoot a link

MTP footprint


Reduces the labor and time to deploy the horizontal cabling in a FTDD installation

Keyed offerings

Eliminates the risk of a user accessing a restricted network

Two mounting options

Provides design flexibility for different FTDD applications

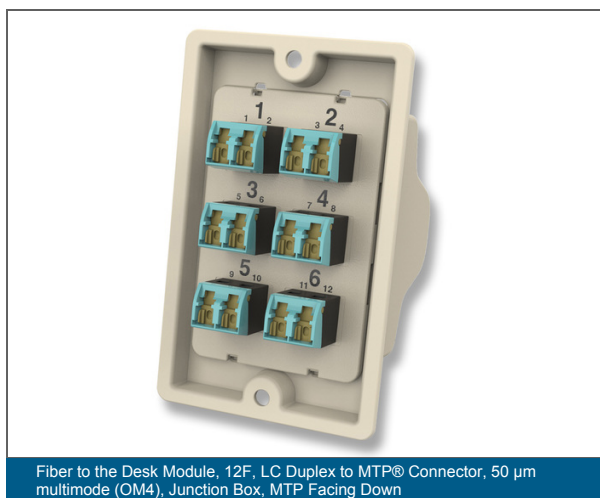

Fiber to the Desk Module, 12F, LC Duplex to MTP® Connector, 50 µm multimode (OM4), Junction Box, MTP Facing Down

Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, 50 µm multimode (OM4)

CORNING

Specifications

General Specifications

Product Type	Panels and Modules
Fiber Category	50 µm MM (OM4)
Application	Fiber to the Premises

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	12
Adapter Type Back	MTP®
Adapter Color Back	Aqua
Adapter Color Front	Aqua
Adapter Type Front	Shuttered LC
Panel or Module Type	Junction Box, Wall-mount
Number of Adapters	6

Cable Design

Polarity	Universal
----------	-----------

Optical Specification - Hardware

Module Insertion Loss, Max	0.5 dB
Wavelengths	850 nm / 1300 nm
Fiber Category	50 µm MM (OM4)

Fiber to the Desk Module 12F, LC Duplex to MTP® Connector, 50 µm multimode (OM4)

CORNING

Specifications - Connector A

Connector Type	MTP® (pinned)
Ferrule Material	Composite

Specifications - Connector B

Connector Type	LC Uniboot
Ferrule Material	Ceramic

Dimensions

Height	94 mm (3.7 in)
Width	59 mm (2.32 in)
Weight	11 kg

Ordering Information

Product Number	MAM-UM12-05A-93AQ-JD
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.