

EDGE™ Hybrid Trunk 12F, 50 µm multimode (OM4), 100 ft

CORNING

Part Number:
G757912QPNDLW100F

EDGE™ MTP® to LC uniboot hybrid trunks combine non-pinned MTP connectors, which connect to EDGE modules, and LC uniboot connectors, which connect directly to the electronics. These trunks enable additional options for cabling of data centers. All hybrid trunks are manufactured with Corning® CleanAdvantage™ technology and shipped with strain-relief clips to allow easy tool-less installation.

Features and Benefits

Snap-in strain-relief clips

Provide easier cable management

Small outer diameter

Improves cable tray fill ratio and allows for imported airflow

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

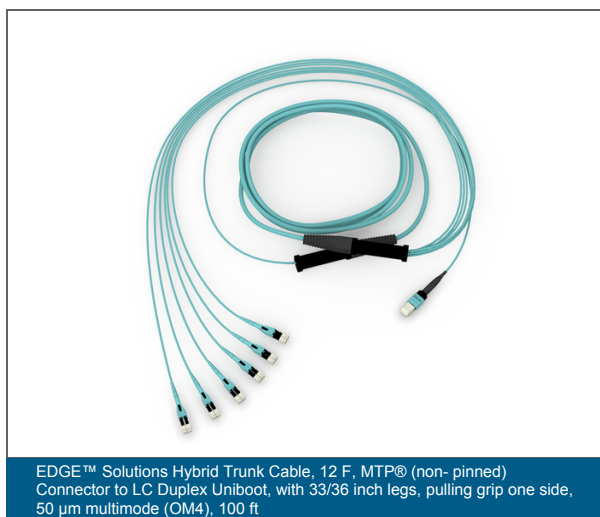

EDGE™ Solutions Hybrid Trunk Cable, 12 F, MTP® (non-pinned) Connector to LC Duplex Uniboot, with 33/36 inch legs, pulling grip one side, 50 µm multimode (OM4), 100 ft

EDGE™ Hybrid Trunk 12F, 50 µm multimode (OM4), 100 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM4)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Application	Data Center
Pulling grip	Yes
Connector Assembly Type	MTP to LC

Standards

Fiber Standards	IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAD (OM4); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM4
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6
Design and Test Criteria	ANSI/ICEA S-83-596

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	12
Polarity	Universal hybrid
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	5.5 mm (0.22 in)
------------------------	-------------------

EDGE™ Hybrid Trunk 12F, 50 µm multimode (OM4), 100 ft

CORNING

Mechanical Specifications

Max. Tensile Strength for Installation	445 N (100.04 lbf)
Min. Bend Radius Installation	82.55 mm (3.25 in)
Min. Bend Radius Operation	27.43 mm (1.08 in)
Weight	32 kg/km (21.5 lb/1000 ft)
Minimum Conduit Size with 18-in Elbow	64 mm (2.52 in)

Optical Characteristics

Fiber Code	T
Performance Option Code	90
Fiber Category	OM4
Fiber Type	Multimode
Fiber Name	50 µm MM (OM4)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 µm
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

EDGE™ Hybrid Trunk 12F, 50 µm multimode (OM4), 100 ft

CORNING

Specifications - Connector B

Insertion Loss, Max.	0.15 dB
Boot Color	Aqua
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -20 dB

Pulling Grip - Connector A

Pulling grip	Yes
Tensile Strength	440 N (98.92 lbf)
Grip Outer Diameter	41 mm (1.61 in)

Pulling Grip - Connector B

Min. Duct Size Diameter	64 mm (2.52 in)
-------------------------	-----------------

Dimensions

Length	100 ft
Cable Weight	32 kg/km (21.5 lb/1000 ft)

Ordering Information

Product Number	G757912QPNDLW100F
Packaging Method	Plastic reel
Reel Diameter	23.5 in
Reel Width	5 in
Units per Delivery	1/1

EDGE™ Hybrid Trunk 12F, 50 µm multimode (OM4), 100 ft

CORNING

Furcation - Connector A

Leg Length non-unit	Non-staggered (900 mm/36 in)
Leg Length	838 mm -0 / +76mm (32.99 in -0 / +2.99in)
Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)
Leg Count	1

Furcation - Connector B

Leg Color	Aqua
Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Diameter	2 mm (0.08 in)
Leg Length	914 mm (35.98 in)
Leg Length non-unit	Non-staggered (900 mm/36 in)
Leg Count	6



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.