

EDGE™ Hybrid Trunk 72F, 50 µm multimode (OM3), 100 ft

CORNING

Part Number:
G757972TPNDLW100F

EDGE™ MTP® to LC uniboot hybrid trunks combine non-pinned MTP connectors, which connect to EDGE modules, and LC uniboot connectors, which connect directly to the electronics. These trunks enable additional options for cabling of data centers. All hybrid trunks are manufactured with Corning® CleanAdvantage™ technology and shipped with strain-relief clips to allow easy tool-less installation.

Features and Benefits

Snap-in strain-relief clips

Provide easier cable management

Small outer diameter

Improves cable tray fill ratio and allows for imported airflow

Low-loss connectivity


Enables system design flexibility

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

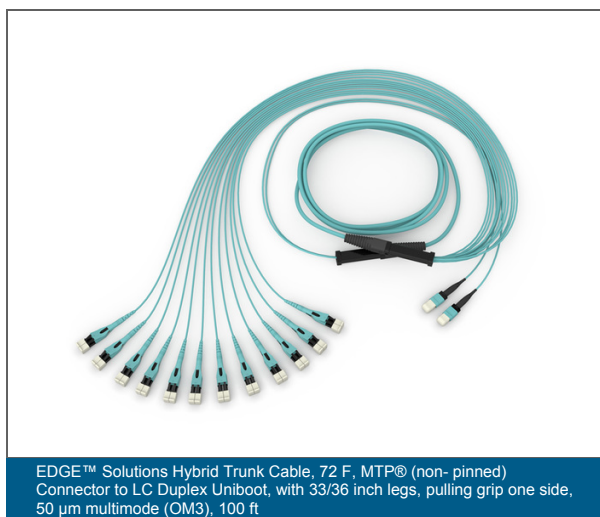

EDGE™ Solutions Hybrid Trunk Cable, 72 F, MTP® (non-pinned) Connector to LC Duplex Uniboot, with 33/36 inch legs, pulling grip one side, 50 µm multimode (OM3), 100 ft

EDGE™ Hybrid Trunk 72F, 50 µm multimode (OM3), 100 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM3)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Pulling grip	Yes
Connector Assembly Type	MTP to LC

Standards

Fiber Standards	IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAC-A (OM3); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM3
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6
Design and Test Criteria	ANSI/ICEA S-83-596

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	72
Polarity	Universal hybrid
Fiber Type	Multimode

Mechanical Specifications

Nominal Outer Diameter	10.5 mm (0.41 in)
Max. Tensile Strength for Installation	445 N (100.04 lbf)

EDGE™ Hybrid Trunk 72F, 50 µm multimode (OM3), 100 ft

CORNING

Mechanical Specifications

Min. Bend Radius Installation	157.5 mm (6.2 in)
Min. Bend Radius Operation	52.58 mm (2.07 in)
Minimum Conduit Size with 18-in Elbow	76 mm (2.99 in)

Specifications - Connector A

Insertion Loss, Max.	0.25 dB
Boot Color	Black
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	< -20 dB

Specifications - Connector B

Insertion Loss, Max.	0.15 dB
Boot Color	Aqua
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Reflectance	< -20 dB

Pulling Grip - Connector A

Pulling grip	Yes
Tensile Strength	440 N (98.92 lbf)
Grip Outer Diameter	56 mm (2.2 in)

Pulling Grip - Connector B

Min. Duct Size Diameter	76 mm (2.99 in)
-------------------------	-----------------

EDGE™ Hybrid Trunk 72F, 50 µm multimode (OM3), 100 ft

CORNING

Dimensions

Length	100 ft
Cable Weight	93 kg/km (62.49 lb/1000 ft)

Ordering Information

Product Number	G757972TPNDLW100F
Packaging Method	Plastic reel
Reel Diameter	23.5 in
Reel Width	5 in
Units per Delivery	1/1

Cable Material

Fiber Count	72
Fiber Type	OM3 MM
Outer Diameter	Standard
Flame Rating	Plenum
Armor	Non-armored
Length	100
Unit of Measure	Feet
Cable Type	Distribution
Fiber Mode	Multimode

CONNECTOR_A_1 Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Loss	Low Loss
Connector Pinning	Non-Pinned

EDGE™ Hybrid Trunk 72F, 50 µm multimode (OM3), 100 ft

CORNING

CONNECTOR_B Material

Connector	LC PC Uniboot
Connector Pairing	Duplex
Connector Keying	Non-Keyed

Furcation A Material

Leg Length	33 in
Leg Length	838 mm -0 / +76mm (32.99 in -0 / +2.99in)
Furcation Type	EDGE™ Size 2, 20 mm x 20 mm x 108.6 mm
Leg Color	Aqua
Leg Diameter	2 mm (0.08 in)
Leg Count	6

Furcation - Connector B

Leg Color	Aqua
Furcation Type	EDGE™ Size 2, 20 mm x 20 mm x 108.6 mm
Leg Diameter	2 mm (0.08 in)
Leg Length	914 mm (35.98 in)
Leg Count	36
Leg Length	36 in



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.