

# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cables with Binderless\* FastAccess® Technology 72 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

**Part Number:**  
**072ZU4-T3F22D20**

Corning ALTOS® cable with Binderless\* FastAccess® technology is an all-dielectric gel-free cable designed for outdoor and limited indoor use for lashed aerial and duct installations. The innovative FastAccess technology feature combined with the gel-free binderless loose tube design simplifies removal of the cable jacket and accessing the buffer tubes. The loose tube design uses Corning SMF-28® Ultra fiber to provide reliable transmission parameters for a variety of voice, data, video and imaging applications. The cable is fully waterblocked using craft-friendly, water-swallowable materials, which means no cleanup is required. The flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy midspan access. The all-dielectric gel-free cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to handle.

\*Corning's patented Binderless FastAccess Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes.

## Features and Benefits

### Binderless\* FastAccess® Technology

Corning's Binderless FastAccess Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes and resulting in a 25 percent improvement in cable access time. These technologies also reduce the overall risk of inadvertent fiber damage by reducing the need for sharp cable access tools.

### Binderless stranded optical core

Elimination of overlapping yarn binders around stranded tubes to reduce end access time

### Fully waterblocked loose tube, gel-free design



Simple access and no clean up

### Polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

### Available with G.652.D and/or G.657.A1 fiber

Ready for any application

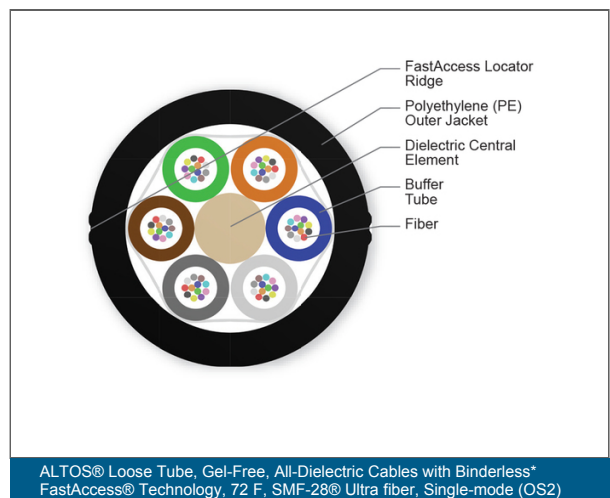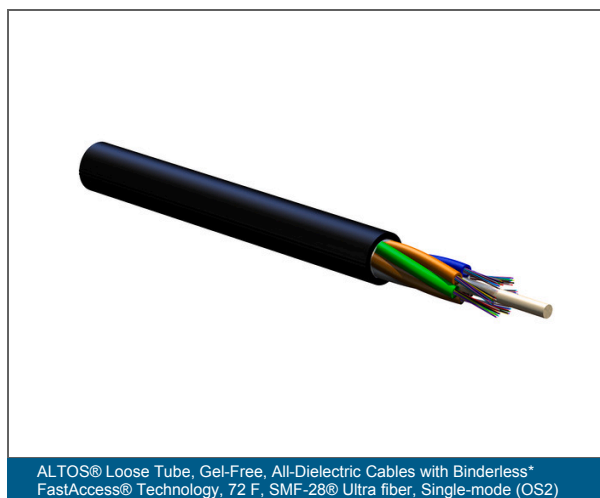

# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cables with Binderless\* FastAccess® Technology 72 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

## Specifications

### General Specifications

|                      |                   |
|----------------------|-------------------|
| Installation Methods | Aerial, Duct      |
| Cable Type           | Loose Tube        |
| Environment          | Outdoor           |
| Product Type         | Dielectric        |
| Fiber Category       | Single-mode (OS2) |
| Cable geometry       | Round             |

### Standards

|                          |                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------|
| RoHS                     | Free of hazardous substances according to RoHS 2011/65/EU                                                       |
| Common Installations     | Outdoor lashed aerial and duct, indoor when installed according to National Electrical Code® (NEC®) Article 770 |
| Design and Test Criteria | ANSI/ICEA S-87-640, Telcordia GR-20, RDUP PE-90                                                                 |

### Environmental Conditions

|                                 |                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes                           | Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results. |
| Temperature Range, Installation | -30 °C to 70 °C (-22 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Operation    | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Storage      | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |

### Cable Design

|                             |                                                                                                                                                |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable Print Unit of Measure | Meter                                                                                                                                          |
| Cable Marking               | Meter - Handset - Sine - CORNING OPTICAL CABLE - Year - 72 F, SMF-28® Ultra fiber, with ALTOS (R) CABLE WITH BINDERLESS FAST ACCESS TECHNOLOGY |
| Central Element             | Dielectric                                                                                                                                     |
| Fiber Count                 | 72                                                                                                                                             |

# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cables with Binderless\* FastAccess® Technology 72 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

## Cable Design

|                          |                                                                                  |
|--------------------------|----------------------------------------------------------------------------------|
| Outer Jacket Color       | Black                                                                            |
| Outer Jacket Material    | Polyethylene (PE)                                                                |
| Buffer Tube Color        | Blue, Orange, Green, Brown, Slate, White                                         |
| Buffer Tube Diameter     | 2.5 mm (0.1 in)                                                                  |
| Number of Active Tubes   | 6                                                                                |
| Number of Tube Positions | 6                                                                                |
| Fiber Coloring           | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube          | 12                                                                               |
| SAP Powder               | Water-swellaable                                                                 |
| Color Code Standards     | Telcordia                                                                        |

## Mechanical Specifications

|                                   |                     |
|-----------------------------------|---------------------|
| Max. Tensile Strength, Long-Term  | 890 N (200.08 lbf)  |
| Max. Tensile Strength, Short-Term | 2700 N (606.98 lbf) |
| Nominal Outer Diameter            | 10.2 mm (0.4 in )   |
| Min. Bend Diameter Installation   | 306 mm (12.05 in)   |
| Min. Bend Diameter Operation      | 204 mm (8.03 in)    |

## Optical Characteristics

|                         |                                      |
|-------------------------|--------------------------------------|
| Fiber Code              | Z                                    |
| Performance Option Code | 22                                   |
| Fiber Category          | OS2                                  |
| Fiber Type              | Single-mode (OS2) / 250 µm           |
| Fiber Name              | Bend-Improved Single-mode (OS2)      |
| Maximum Attenuation     | 0.34 dB/km / 0.34 dB/km / 0.22 dB/km |
| Wavelengths             | 1310 nm / 1383 nm / 1550 nm          |
| Fiber Compliance        | ITU-T G.652.D and ITU-T G.657.A1     |

**ALTOS® Loose Tube, Gel-Free, All-Dielectric  
Cables with Binderless\* FastAccess®  
Technology 72 F, SMF-28® Ultra fiber, Single-  
mode (OS2)**



| Dimensions   |                               |
|--------------|-------------------------------|
| Cable Weight | 66.8 kg/km (44.89 lb/1000 ft) |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.