

# EDGE™ Solutions 2x3 Conversion Harness 2 x MTP® Pro (12 F) to 3 x MTP Pro (8 F), 50 µm multimode (OM4)

CORNING

**Part Number:**  
**H937524QLZ-KKA003M**

EDGE™ Solutions conversion harness is a LS0H-rated preterminated harness that, like the EDGE module, provides the conversion from 12- to 8-fiber connectivity for full-fiber utilization. It is offered as a 2x3 MTP® harness (two 12-fiber MTP PRO connectors on one end, three 8-fiber MTP PRO connectors on the other) for connection to electronics with MPO-style ports. EDGE harnesses are a TIA-568 Type-A component.

## Features and Benefits

### **Reversible MTP PRO adapters allow on-site polarity changes**


Reduced risk of installation delays or errors during commissioning of new devices

### **Utilises existing EDGE Solutions hardware and backbone cabling**

Higher return on investment and reduced capitalisation and installation costs

### **Corning®**

Fiber-enabled components create smaller form factor, more rugged cabling

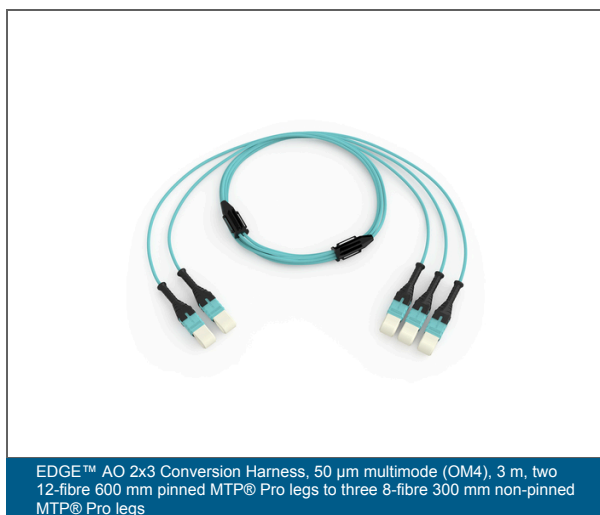

EDGE™ AO 2x3 Conversion Harness, 50 µm multimode (OM4), 3 m, two 12-fibre 600 mm pinned MTP® Pro legs to three 8-fibre 300 mm non-pinned MTP® Pro legs

# EDGE™ Solutions 2x3 Conversion Harness 2 x MTP® Pro (12 F) to 3 x MTP Pro (8 F), 50 µm multimode (OM4)

CORNING

## Specifications

### General Specifications

|                     |                            |
|---------------------|----------------------------|
| Flame Rating        | Plenum (OFNP)              |
| Fiber Category      | 50 µm MM (OM4)             |
| Cable Assembly Type | EDGE™ Harness              |
| Cable Type          | Indoor: ANSI/ICEA S-83-596 |

### Standards

|      |                                                           |
|------|-----------------------------------------------------------|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|-----------------------------------------------------------|

### Environmental Conditions

|                              |                                    |
|------------------------------|------------------------------------|
| Temperature Range, Operation | -10 °C to 60 °C (14 °F to 140 °F ) |
| Temperature Range, Storage   | -10 °C to 60 °C (14 °F to 140 °F ) |

### Design

|                       |           |
|-----------------------|-----------|
| Fiber Count           | 24        |
| Outer Jacket Material | LSZH/FRNC |
| Polarity              | Universal |

### Mechanical Specifications

|                                        |                   |
|----------------------------------------|-------------------|
| Nominal Outer Diameter                 | 2 mm (0.08 in )   |
| Max. Tensile Strength for Installation | 220 N (49.46 lbf) |
| Min. Bend Radius Installation          | 30 mm (1.18 in)   |
| Min. Bend Radius Operation             | 10 mm (0.39 in)   |

### Optical Characteristics

|            |   |
|------------|---|
| Fiber Code | T |
|------------|---|

# EDGE™ Solutions 2x3 Conversion Harness 2 x MTP® Pro (12 F) to 3 x MTP Pro (8 F), 50 µm multimode (OM4)

CORNING

## Optical Characteristics

|                                         |                          |
|-----------------------------------------|--------------------------|
| Performance Option Code                 | 98                       |
| Fiber Category                          | OM4                      |
| Fiber Type                              | Multimode                |
| Fiber Name                              | 50 µm MM (OM4)           |
| Maximum Attenuation                     | 2.8 dB/km / 1.0 dB/km    |
| Wavelengths                             | 850 nm / 1300 nm         |
| Fiber Compliance                        | IEC 60793-2-10           |
| Fiber Core Diameter                     | 50 µm                    |
| Cladding diameter                       | 125 µm                   |
| Coating diameter                        | 242 µm                   |
| Serial 1 Gigabit Ethernet               | 1000 m / 600 m           |
| Serial 10 Gigabit Ethernet              | 550 m / -                |
| Minimum Effective Modal Bandwidth (EMB) | 4700 MHz*km / -          |
| Min. Overfilled Launch (OFL) Bandwidth  | 3500 MHz*km / 500 MHz*km |

## Specifications - Connector A

|                      |                   |
|----------------------|-------------------|
| Reflectance, Typical | < -20 dB          |
| Insertion Loss, Max. | 0.35 dB           |
| Connector Type       | MTP® PRO (pinned) |
| Ferrule Material     | Composite         |

## Specifications - Connector B

|                      |                       |
|----------------------|-----------------------|
| Reflectance, Typical | < -20 dB              |
| Insertion Loss, Max. | 0.15 dB               |
| Connector Type       | MTP® PRO (non-pinned) |
| Ferrule Material     | Composite             |

# EDGE™ Solutions 2x3 Conversion Harness 2 x MTP® Pro (12 F) to 3 x MTP Pro (8 F), 50 µm multimode (OM4)

CORNING

## Furcation - Connector A

|           |      |
|-----------|------|
| Leg Color | Aqua |
|-----------|------|

## Dimensions

|              |                             |
|--------------|-----------------------------|
| Length       | 3 m (9.84 ft)               |
| Cable Weight | 4.6 kg/km (3.09 lb/1000 ft) |

## Ordering Information

|                    |                    |
|--------------------|--------------------|
| Product Number     | H937524QLZ-KKA003M |
| Units per Delivery | 1/1                |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.