

EDGE™ Indoor Ribbon Trunk Riser LSZH™ with Routable Subunit, 288F, Single-mode Ultra (OS2), 100 ft

CORNING

Part Number:
A0090U8GQJ0BP100F

EDGE™ Indoor Ribbon Trunks with Routable Subunits provide the backbone of the structured cabling solution while reducing time required to prepare and furcate the cable for field splicing. With MTP® connectors on one end, these trunks are designed to interface with EDGE Solutions or Plug & Play™ Solutions modules. Blunt cable with routable subunits on the other end decreases installation time by reducing the labor needed to furcate and prepare the cable for splicing. These trunks are dual-rated Riser LSZH™ for global use. They are shipped with a mesh pulling grip on the pigtail end and a protective cover on the MTP connectors.

Features and Benefits

Preterminated MTP

Factory assembly results in quicker deployment and better performance while reducing risks associated with field installation, rework, or high insertion loss. MTP connectivity provides the flexibility to migrate to parallel optics, clearing the path to 40G/100G/400G

Flexible, routable subunit

Eliminates the need for furcation when routing directly into hardware and enabling individual access to each ribbon for efficient management in splice trays

Reduced Cable Pathways


With fiber counts ranging from 12 to 864 fibers, deploying a single high-fiber-count trunk can provide pathway savings of 25-70% compared to deploying multiple cables, which is of importance when passing through a conduit

Bend-improved fiber

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Reduced Install Time

Deploying a single high-fiber-count trunk can reduce installation speed and cost by up to 50% when compared to deploying multiple cables in lower fiber counts

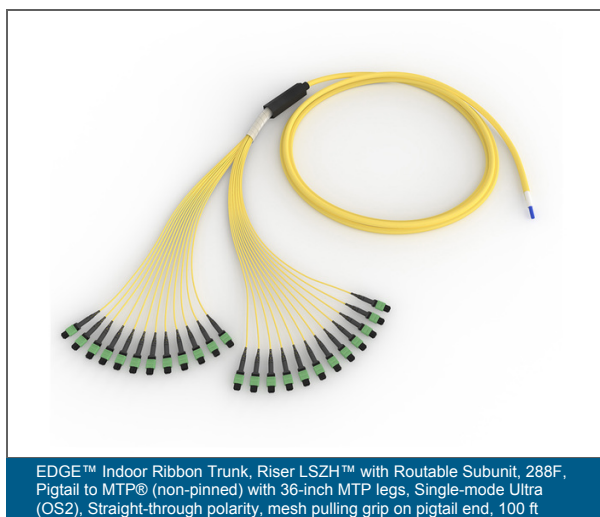

EDGE™ Indoor Ribbon Trunk, Riser LSZH™ with Routable Subunit, 288F, Pigtail to MTP® (non-pinned) with 36-inch MTP legs, Single-mode Ultra (OS2), Straight-through polarity, mesh pulling grip on pigtail end, 100 ft

EDGE™ Indoor Ribbon Trunk Riser LSZH™ with Routable Subunit, 288F, Single-mode Ultra (OS2), 100 ft

CORNING

Specifications

General Specifications

Flame Rating	Riser (ONFR) / LSZH Dual Rating
Fiber Category	Bend-improved SM (OS2)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Application	Data Center
Cable Type	Indoor LSZH
Connector Assembly Type	MTP to Pigtail

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	288
Polarity	Straight through
Fiber Type	Single-mode

Mechanical Specifications

Nominal Outer Diameter	13.6 mm (0.54 in)
Min. Bend Radius Installation	204 mm (8.03 in)
Min. Bend Radius Operation	170 mm (6.69 in)
Weight	196.7 kg/km (132.18 lb/1000 ft)

Optical Characteristics

Fiber Code	Z
Performance Option Code	01

EDGE™ Indoor Ribbon Trunk Riser LSZH™ with Routable Subunit, 288F, Single-mode Ultra (OS2), 100 ft

CORNING

Optical Characteristics

Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1

Specifications - Connector B

Insertion Loss, Max.	0.75 dB
Boot Color	Black
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	< -65 dB

Pulling Grip - Connector A

Pulling grip	Yes
--------------	-----

Dimensions

Length	100 ft
Cable Weight	196.7 kg/km (132.18 lb/1000 ft)

Ordering Information

Product Number	A0090U8GQJ0BP100F
Units per Delivery	1/1

**EDGE™ Indoor Ribbon Trunk Riser LSZH™ with
Routable Subunit, 288F, Single-mode Ultra (OS2),
100 ft**



Furcation - Connector B	
Leg Color	Yellow
Leg Diameter	2.9 mm (0.11 in)
Leg Length	914 mm (35.98 in)
Leg Count	24



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.