

EDGE™ MTP® Trunk Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 12 F, with 33/33 inch legs, pulling grip one side, 150 ft

CORNING

Part Number:
G909012GPNDDU150F

EDGE™ MTP® trunks provide the backbone of the EDGE solution. With non-pinned MTP connectors on both ends, these fiber trunk cable assemblies are designed to interface with the EDGE solutions or Plug & Play™ systems modules. All MTP trunks are manufactured with Corning® CleanAdvantage™, MTP trunk cables are shipped with strain-relief clips to allow easy tool-less installation.

Features and Benefits

Snap-in strain-relief clips

Provide easier cable management

Small outer diameter

Improves cable tray fill ratio and allows for imported airflow

Low-loss connectivity

Enables system design flexibility

Bend-improved fiber


Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

Fiber optic trunk cable manufactured with Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

Non-pinned MTP connectors on both ends

Fiber optic trunks designed to interface with the EDGE solutions or Plug & Play™ systems modules

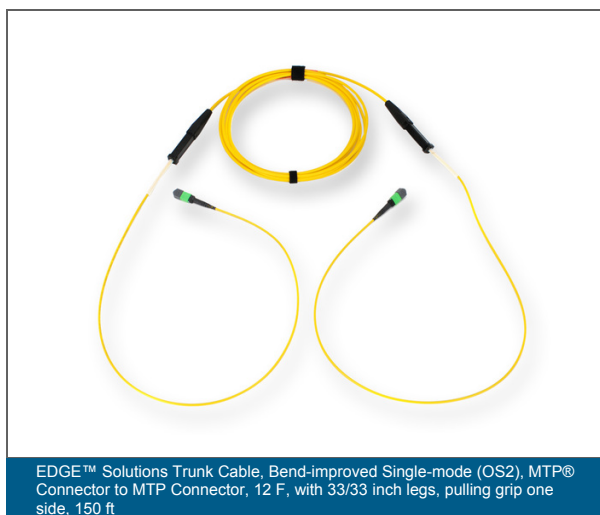

EDGE™ MTP® Trunk Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 12 F, with 33/33 inch legs, pulling grip one side, 150 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	Bend-improved SM (OS2)
Cable Assembly Type	EDGE™ Trunk
Environment	Indoor
Pulling grip	Yes
Connector Assembly Type	MTP to MTP

Standards

Fiber Standards	ITU-T G.652.D and ITU-T G.657.A1
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6
Design and Test Criteria	ANSI/ICEA S-83-596

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	12
Polarity	Universal, TIA-568 Type-B
Strain-Relief Bracket Type	1
Fiber Type	Single-Mode Ultra-Bendable Fiber

Mechanical Specifications

Nominal Outer Diameter	5.5 mm ± 0.3mm (0.22 in ± 0.01in)
Max. Tensile Strength for Installation	440 N (98.92 lbf)

EDGE™ MTP® Trunk Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 12 F, with 33/33 inch legs, pulling grip one side, 150 ft

CORNING

Mechanical Specifications

Min. Bend Radius Installation	82.5 mm (3.25 in)
Min. Bend Radius Operation	27.5 mm (1.08 in)
Minimum Conduit Size with 18-in Elbow	63.5 mm (2.5 in)

Optical Characteristics

Fiber Code	Z
Performance Option Code	01
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1

Specifications - Connector A

Insertion Loss, Max.	0.75 dB
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	< -55 dB

Specifications - Connector B

Insertion Loss, Max.	0.75 dB
Connector Type	MTP® (non-pinned)
Ferrule Material	Composite
Reflectance	< -55 dB

EDGE™ MTP® Trunk Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 12 F, with 33/33 inch legs, pulling grip one side, 150 ft

CORNING

Pulling Grip - Connector A

Pulling grip	Yes
Tensile Strength	440 N (98.92 lbf)
Grip Outer Diameter	41 mm (1.61 in)

Pulling Grip - Connector B

Min. Duct Size Diameter	64 mm (2.52 in)
-------------------------	-----------------

Dimensions

Length	150 ft
Cable Weight	32 kg/km (21.5 lb/1000 ft)

Ordering Information

Product Number	G909012GPNDDU150F
Reel Diameter	23.5 in
Reel Width	5 in
Units per Delivery	1/1

Cable Material

Fiber Count	12
Fiber Type	OS2 Bend-improved SM
Outer Diameter	Standard
Flame Rating	Plenum
Aarmor	Non-armored
Length	150
Unit of Measure	Feet
Cable Type	Distribution
Fiber Mode	Single-Mode

EDGE™ MTP® Trunk Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 12 F, with 33/33 inch legs, pulling grip one side, 150 ft

CORNING

CONNECTOR_A_1 Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Loss	Standard Loss
Connector Pinning	Non-Pinned

CONNECTOR_B Material

Connector	MTP® 12F Non-pinned
Connector Keying	Non-Keyed
Connector Pinning	Non-Pinned
Connector Loss	Standard Loss

Furcation A Material

Leg Length	33 in
Leg Length	838 mm -0 / +76mm (32.99 in -0 / +2.99in)
Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Color	Yellow
Leg Diameter	2 mm (0.08 in)

Furcation - Connector B

Furcation Type	EDGE™ Size 1, 14.7 mm x 14.7 mm x 108.6 mm
Leg Diameter	2 mm (0.08 in)
Leg Length	838 mm (32.99 in)
Leg Length	33 in

EDGE™ MTP® Trunk Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 12 F, with 33/33 inch legs, pulling grip one side, 150 ft

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.