


# EDGE™ Module 12F, Bend-improved Single-mode (OS2)

CORNING

**Part Number:**  
**ECM-UM12-18-89G**

EDGE™ low-loss modules provide an interface between the MTP® connector on an MTP trunk and the LC duplex jumpers that connect directly to the electronics. These modules feature VFL-compatible LC shuttered adapters and are manufactured with Corning® CleanAdvantage™ Technology, an innovative factory cleaning and sealing process that minimizes debris transfer and allows you to connect with confidence.

All EDGE modules meet RoHS standards and are ideal for data center, local area network (LAN), and storage area network (SAN) applications.

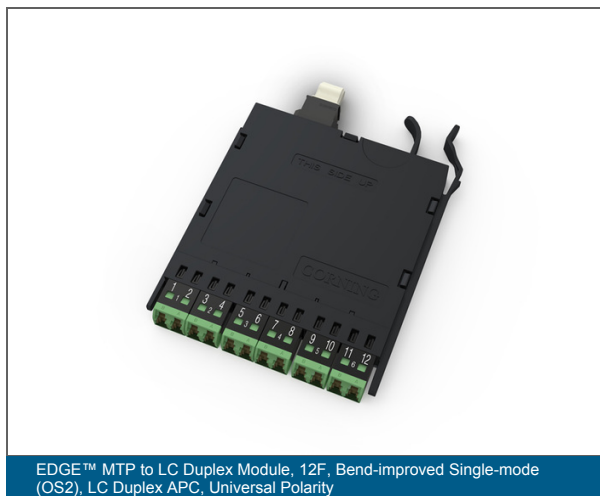

EDGE™ MTP to LC Duplex Module, 12F, Bend-improved Single-mode (OS2), LC Duplex APC, Universal Polarity

# EDGE™ Module 12F, Bend-improved Single-mode (OS2)

CORNING

## Specifications

### General Specifications

|                |                        |
|----------------|------------------------|
| Product Type   | Modules                |
| Fiber Category | Bend-improved SM (OS2) |
| Application    | Data Center            |

### Standards

|      |                                                           |
|------|-----------------------------------------------------------|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|-----------------------------------------------------------|

### Design

|                     |                    |
|---------------------|--------------------|
| Fiber Count         | 12                 |
| Adapter Type Back   | MTP®               |
| Adapter Color Back  | Black              |
| Adapter Color Front | Green              |
| Adapter Type Front  | LC duplex          |
| Housing Type        | Panels and Modules |
| Product Family      | EDGE               |

### Cable Design

|          |           |
|----------|-----------|
| Polarity | Universal |
|----------|-----------|

### Design - Adapter

|               |           |
|---------------|-----------|
| Housing Color | Green     |
| Adapter Style | Shuttered |

### Optical Specification - Hardware

|                            |      |
|----------------------------|------|
| Module Insertion Loss, Max | 1 dB |
|----------------------------|------|

# EDGE™ Module 12F, Bend-improved Single-mode (OS2)

CORNING

## Optical Specification - Hardware

|             |                   |
|-------------|-------------------|
| Wavelengths | 1310 nm / 1550 nm |
|-------------|-------------------|

## Connector Specs

|               |       |
|---------------|-------|
| Housing Color | Green |
|---------------|-------|

## Specifications - Connector A

|                      |           |
|----------------------|-----------|
| Connector Type       | LC duplex |
| Housing Color        | Green     |
| Polish               | APC       |
| Housing Material     | Composite |
| Ferrule Material     | Composite |
| Keyed (security)     | No        |
| Endface Type         | APC       |
| Insertion Loss, Max. | 0.5 dB    |
| Reflectance, Typical | ≤ -65 dB  |

## Specifications - Connector B

|                  |               |
|------------------|---------------|
| Connector Type   | MTP® (pinned) |
| Polish           | APC           |
| Housing Material | Composite     |
| Ferrule Material | Ceramic       |
| Endface Type     | APC           |

## Dimensions

|       |                  |
|-------|------------------|
| Width | 102 mm (4.02 in) |
| Depth | 125 mm (4.92 in) |

# EDGE™ Module 12F, Bend-improved Single-mode (OS2)

CORNING

## Ordering Information

|                    |                          |
|--------------------|--------------------------|
| Product Number     | ECM-UM12-18-89G          |
| Packaging Method   | Individual Blister Packs |
| Units per Delivery | 1/1                      |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.