

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 96 F, 50 µm multimode (OM2)

CORNING

**Part Number:**  
**096TUB-T4131D20**

Corning ALTOS® figure-8 gel-free cables are self-supporting aerial cables designed for easy and economical one-step installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The gel-free design is fully waterblocked using craft-friendly water-swallowable materials, making cable access simple and requiring no clean up. While the flexible, craft-friendly buffer tubes are easy to route in closures, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates mid-span access. The figure-8 cable design allows easy, one-step installation, using standard hardware and installation methods. These cables have a medium density polyethylene jacket that is rugged, durable and easy to strip.

## Features and Benefits

### Gel-free waterblocking technology


Craft-friendly cable preparation

### Polyethylene jacket


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

### Figure-8 cable design

Easy, one-step installation

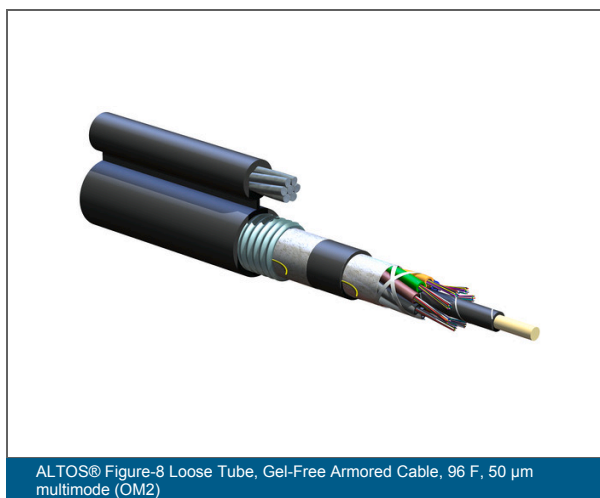

ALTOS® Figure-8 Loose Tube, Gel-Free Armored Cable, 96 F, 50 µm multimode (OM2)

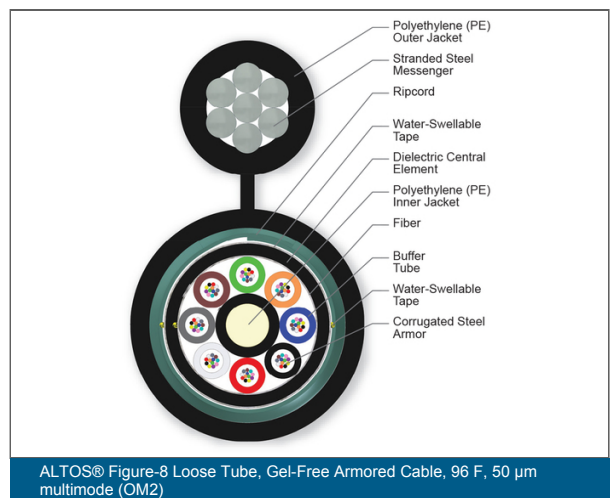

ALTOS® Figure-8 Loose Tube, Gel-Free Armored Cable, 96 F, 50 µm multimode (OM2)

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 96 F, 50 µm multimode (OM2)

CORNING

## Specifications

### General Specifications

|                      |                           |
|----------------------|---------------------------|
| Installation Methods | Aerial                    |
| Cable Type           | Loose Tube                |
| Environment          | Outdoor                   |
| Product Type         | Self-Supporting, Figure-8 |
| Fiber Category       | 50 µm MM (OM2)            |
| Cable geometry       | Other                     |

### Standards

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| RoHS                     | Free of hazardous substances according to RoHS 2011/65/EU |
| Common Installations     | Outdoor self-supporting aerial                            |
| Design and Test Criteria | ANSI/ICEA S-87-640                                        |

### Environmental Conditions

|                                 |                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes                           | Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results. |
| Temperature Range, Installation | -30 °C to 70 °C (-22 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Operation    | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Storage      | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |

### Cable Design

|                       |                   |
|-----------------------|-------------------|
| Central Element       | Dielectric        |
| Fiber Count           | 96                |
| Number of Ripcords    | 3                 |
| Outer Jacket Color    | Black             |
| Outer Jacket Material | Polyethylene (PE) |

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 96 F, 50 µm multimode (OM2)

CORNING

## Cable Design

|                                                     |                                                                                  |
|-----------------------------------------------------|----------------------------------------------------------------------------------|
| Tensile Strength Elements and/or Armoring - Layer 1 | Corrugated steel tape armor                                                      |
| Buffer Tube Color                                   | Blue, Orange, Green, Brown, Slate, White, Red, Black                             |
| Buffer Tube Diameter                                | 2.5 mm (0.1 in)                                                                  |
| Inner Jacket Material                               | Polyethylene (PE)                                                                |
| Messenger                                           | Stranded steel                                                                   |
| Number of Active Tubes                              | 8                                                                                |
| Number of Tube Positions                            | 8                                                                                |
| Tape                                                | Water-swellable                                                                  |
| Fiber Coloring                                      | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube                                     | 12                                                                               |
| Color Code Standards                                | Telcordia                                                                        |

## Mechanical Specifications

|                                 |                   |
|---------------------------------|-------------------|
| Nominal Cable Height            | 27.6 mm (1.09 in) |
| Nominal Outer Diameter          | 16 mm (0.63 in )  |
| Min. Bend Diameter Installation | 480 mm (18.9 in)  |
| Min. Bend Diameter Operation    | 320 mm (12.6 in)  |

## Optical Characteristics

|                         |                       |
|-------------------------|-----------------------|
| Fiber Code              | T                     |
| Performance Option Code | 31                    |
| Fiber Category          | OM2                   |
| Fiber Type              | Multimode             |
| Fiber Name              | 50 µm MM (OM2)        |
| Maximum Attenuation     | 3.0 dB/km / 1.0 dB/km |
| Wavelengths             | 850 nm / 1300 nm      |
| Fiber Compliance        | IEC 60793-2-10        |
| Fiber Core Diameter     | 50 µm                 |

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 96 F, 50 µm multimode (OM2)

CORNING

## Optical Characteristics

|                                         |                         |
|-----------------------------------------|-------------------------|
| Serial 1 Gigabit Ethernet               | 750 m / 600 m           |
| Serial 10 Gigabit Ethernet              | 150 m / -               |
| Minimum Effective Modal Bandwidth (EMB) | 950 MHz*km / -          |
| Min. Overfilled Launch (OFL) Bandwidth  | 700 MHz*km / 500 MHz*km |

## Dimensions

|              |                               |
|--------------|-------------------------------|
| Cable Weight | 432 kg/km (290.29 lb/1000 ft) |
|--------------|-------------------------------|



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.