

ALTOS® Figure-8 Loose Tube, Gel-Free Cable 192 F, 62.5 µm multimode (OM1)

CORNING

Part Number:
192KUB-T4130D20

Corning ALTOS® figure-8 gel-free cables are self-supporting aerial cables designed for easy and economical one-step installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The gel-free design is fully waterblocked using craft-friendly water-swallowable materials, making cable access simple and requiring no clean up. While the flexible, craft-friendly buffer tubes are easy to route in closures, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates mid-span access. The figure-8 cable design allows easy, one-step installation, using standard hardware and installation methods. These cables have a medium density polyethylene jacket that is rugged, durable and easy to strip.

Features and Benefits

Gel-free waterblocking technology


Craft-friendly cable preparation

Polyethylene jacket


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Figure-8 cable design

Easy, one-step installation

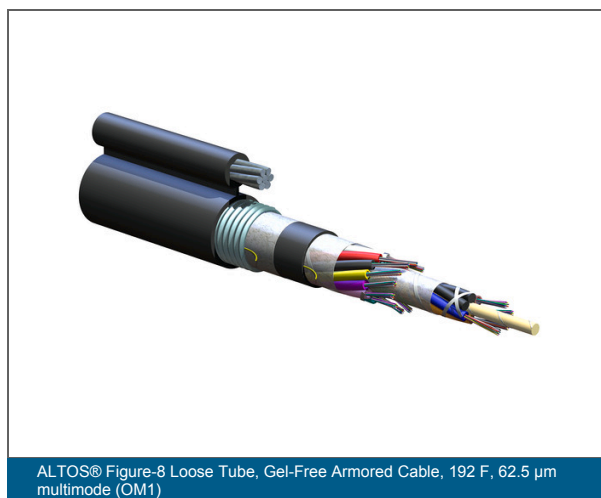

ALTOS® Figure-8 Loose Tube, Gel-Free Armored Cable, 192 F, 62.5 µm multimode (OM1)

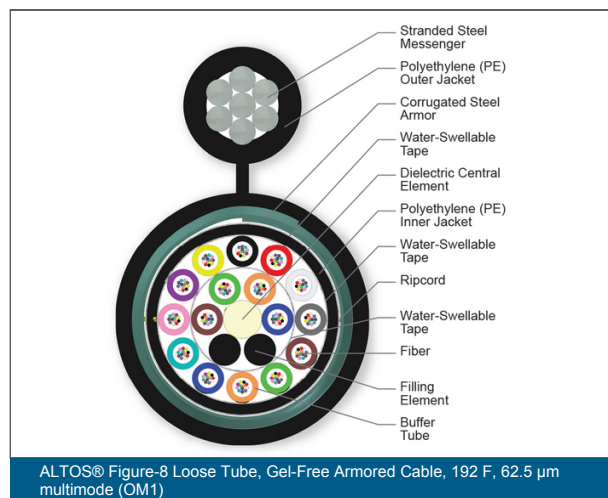

ALTOS® Figure-8 Loose Tube, Gel-Free Armored Cable, 192 F, 62.5 µm multimode (OM1)

ALTOS® Figure-8 Loose Tube, Gel-Free Cable 192 F, 62.5 µm multimode (OM1)

CORNING

Specifications

General Specifications

Installation Methods	Aerial
Cable Type	Loose Tube
Environment	Outdoor
Product Type	Self-Supporting, Figure-8
Fiber Category	62.5 µm MM (OM1)
Cable geometry	Other

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Outdoor self-supporting aerial
Design and Test Criteria	ANSI/ICEA S-87-640

Environmental Conditions

Notes	Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.
Temperature Range, Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	192
Number of Ripcords	3
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown
Outer Jacket Color	Black

ALTOS® Figure-8 Loose Tube, Gel-Free Cable 192 F, 62.5 µm multimode (OM1)

CORNING

Cable Design	
Outer Jacket Material	Polyethylene (PE)
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Buffer Tube Diameter	2.5 mm (0.1 in)
Inner Jacket Material	Polyethylene (PE)
Messenger	Stranded steel
Number of Active Tubes	16
Number of Filling Elements	2
Number of Tube Positions	18
Tape	Water-swellaable
Tape, Layer 1	Water-swellaable
Tape, Layer 2	Water-swellaable
Tape, Layer 3	Water-swellaable
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Color Code Standards	Telcordia

Mechanical Specifications	
Nominal Cable Height	31.5 mm (1.24 in)
Nominal Outer Diameter	19.9 mm (0.78 in)
Min. Bend Diameter Installation	598 mm (23.54 in)
Min. Bend Diameter Operation	398 mm (15.67 in)

Optical Characteristics	
Fiber Code	K
Performance Option Code	30
Fiber Category	OM1
Fiber Type	Multimode
Fiber Name	62.5 µm MM (OM1)

ALTOS® Figure-8 Loose Tube, Gel-Free Cable 192 F, 62.5 µm multimode (OM1)

CORNING

Optical Characteristics

Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	ISO/IEC 11801
Fiber Core Diameter	62.5 µm
Coating diameter	242 µm
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km

Dimensions

Cable Weight	513 kg/km (344.72 lb/1000 ft)
--------------	-------------------------------



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.