

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 216 F, 62.5 µm multimode (OM1)

CORNING

## Part Number: 216KUA-T4130D20

Corning ALTOS® figure-8 gel-free cables are self-supporting aerial cables designed for easy and economical one-step installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The gel-free design is fully waterblocked using craft-friendly water-swappable materials, making cable access simple and requiring no clean up. While the flexible, craft-friendly buffer tubes are easy to route in closures, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates mid-span access. The figure-8 cable design allows easy, one-step installation, using standard hardware and installation methods. These cables have a medium density polyethylene jacket that is rugged, durable and easy to strip.

## Features and Benefits

### Gel-free waterblocking technology


Craft-friendly cable preparation

### Polyethylene jacket


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

### Figure-8 cable design

Easy, one-step installation

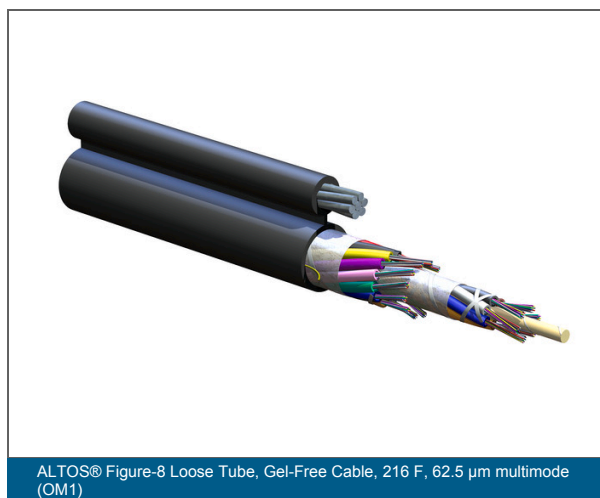

ALTOS® Figure-8 Loose Tube, Gel-Free Cable, 216 F, 62.5 µm multimode (OM1)

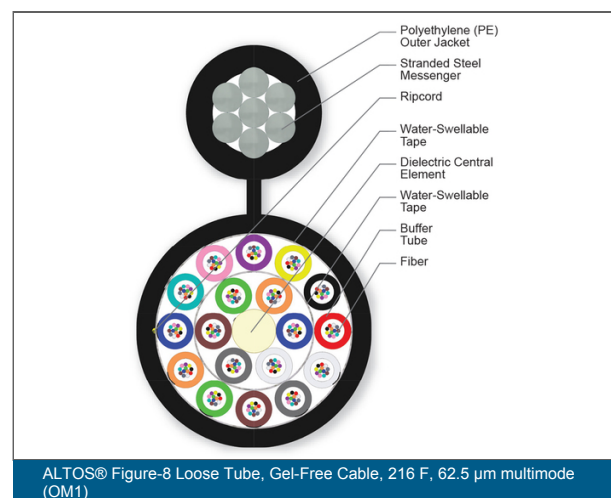

ALTOS® Figure-8 Loose Tube, Gel-Free Cable, 216 F, 62.5 µm multimode (OM1)

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 216 F, 62.5 µm multimode (OM1)

CORNING

## Specifications

### General Specifications

|                      |                           |
|----------------------|---------------------------|
| Installation Methods | Aerial                    |
| Cable Type           | Loose Tube                |
| Environment          | Outdoor                   |
| Product Type         | Self-Supporting, Figure-8 |
| Fiber Category       | 62.5 µm MM (OM1)          |
| Cable geometry       | Other                     |

### Standards

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| RoHS                     | Free of hazardous substances according to RoHS 2011/65/EU |
| Common Installations     | Outdoor self-supporting aerial                            |
| Design and Test Criteria | ANSI/ICEA S-87-640                                        |

### Environmental Conditions

|                                 |                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes                           | Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results. |
| Temperature Range, Installation | -30 °C to 70 °C (-22 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Operation    | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |
| Temperature Range, Storage      | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                                                                                                            |

### Cable Design

|                                   |                                          |
|-----------------------------------|------------------------------------------|
| Central Element                   | Dielectric                               |
| Fiber Count                       | 216                                      |
| Number of Ripcords                | 1                                        |
| Buffer Tube Color Coding, Layer 1 | Blue, Orange, Green, Brown, Slate, White |
| Outer Jacket Color                | Black                                    |

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 216 F, 62.5 µm multimode (OM1)

CORNING

## Cable Design

|                          |                                                                                  |
|--------------------------|----------------------------------------------------------------------------------|
| Outer Jacket Material    | Polyethylene (PE)                                                                |
| Buffer Tube Diameter     | 2.5 mm (0.1 in)                                                                  |
| Messenger                | Stranded steel                                                                   |
| Number of Active Tubes   | 18                                                                               |
| Number of Tube Positions | 18                                                                               |
| Tape                     | Water-swellable                                                                  |
| Tape, Layer 2            | Water-swellable                                                                  |
| Fiber Coloring           | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube          | 12                                                                               |
| Color Code Standards     | Telcordia                                                                        |

## Mechanical Specifications

|                                 |                   |
|---------------------------------|-------------------|
| Nominal Cable Height            | 27.6 mm (1.09 in) |
| Nominal Outer Diameter          | 16 mm (0.63 in )  |
| Min. Bend Diameter Installation | 480 mm (18.9 in)  |
| Min. Bend Diameter Operation    | 320 mm (12.6 in)  |

## Optical Characteristics

|                         |                       |
|-------------------------|-----------------------|
| Fiber Code              | K                     |
| Performance Option Code | 30                    |
| Fiber Category          | OM1                   |
| Fiber Type              | Multimode             |
| Fiber Name              | 62.5 µm MM (OM1)      |
| Maximum Attenuation     | 3.4 dB/km / 1.0 dB/km |
| Wavelengths             | 850 nm / 1300 nm      |
| Fiber Compliance        | ISO/IEC 11801         |
| Fiber Core Diameter     | 62.5 µm               |
| Coating diameter        | 242 µm                |

# ALTOS® Figure-8 Loose Tube, Gel-Free Cable 216 F, 62.5 µm multimode (OM1)

CORNING

## Optical Characteristics

|                                         |                         |
|-----------------------------------------|-------------------------|
| Serial 1 Gigabit Ethernet               | 300 m / 550 m           |
| Serial 10 Gigabit Ethernet              | 33 m / -                |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / -          |
| Min. Overfilled Launch (OFL) Bandwidth  | 200 MHz*km / 500 MHz*km |

## Dimensions

|              |                              |
|--------------|------------------------------|
| Cable Weight | 371 kg/km (249.3 lb/1000 ft) |
|--------------|------------------------------|



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.