

ALTOS® HD Gel-Free, All-Dielectric Cable with Binderless* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Part Number:
096ZU4-Y4F22D20

Corning® ALTOS® HD cable with Binderless* FastAccess® technology is a high-density, all-dielectric gel-free cable designed for outdoor use for lashed aerial and duct installations.

The 24 fiber high-density buffer tube provides a 30 percent reduction in cable OD and a 2x increase in fiber density, which equals additional space for maximizing duct capacity. The buffer tubes and the fibers contained within are color-coded for quick and easy identification.

The innovative FastAccess technology feature combined with the gel-free binderless loose tube design simplifies cable jacket removal and tube access. The flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy midspan access.

The all-dielectric gel-free cable construction requires no bonding or grounding, and its medium-density polyethylene jacket that is rugged, durable, and easy to handle. The cable is fully waterblocked using craft-friendly, water-swallowable materials, which means no cleanup is required.

Features and Benefits

ALTOS® HD FastAccess® Technology

With the combination of a jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes and up to a 60 percent improvement in cable access time. These technologies also reduce the overall risk of inadvertent fiber damage by reducing the need for sharp cable access tools.

Binderless stranded optical core

Elimination of overlapping yarn binders around stranded tubes to reduce end access time

Fully waterblocked loose tube all-dielectric gel-free design


Simple access and no clean up

Polyethylene jacket


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Available with Corning's SMF-28® Ultra fiber and SMF-28e+

ITU-T G.652.D and ITU.T G.657.A1 compliant fiber ready for any application.

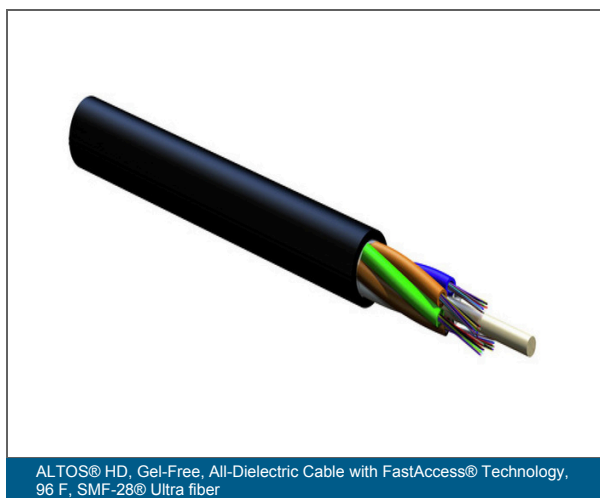


ALTOS® HD, Gel-Free, All-Dielectric Cable with FastAccess® Technology, 96 F, SMF-28® Ultra fiber

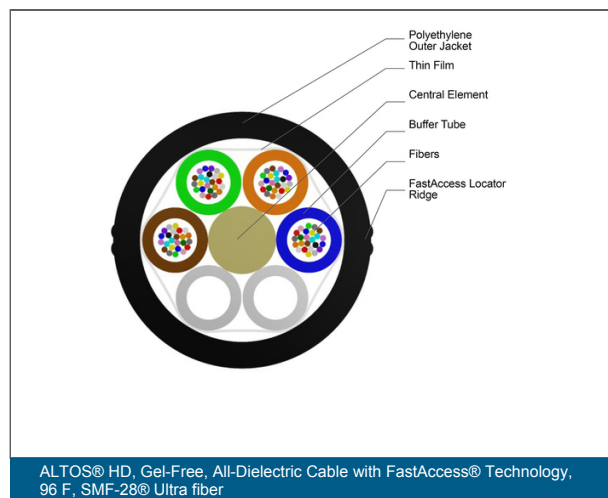

ALTOS® HD, Gel-Free, All-Dielectric Cable with FastAccess® Technology, 96 F, SMF-28® Ultra fiber

ALTOS® HD Gel-Free, All-Dielectric Cable with Binderless* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

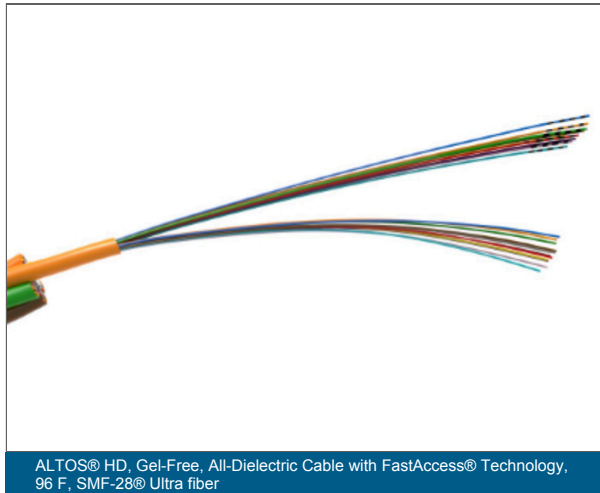

Specifications

General Specifications

Installation Methods	Aerial, Duct
Cable Type	Loose Tube
Environment	Outdoor
Product Type	Dielectric
Fiber Category	SMF-28® Ultra
Cable geometry	Round

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Outdoor lashed aerial and duct, indoor when installed according to National Electrical Code® (NEC®) Article 770
Design and Test Criteria	ANSI/ICEA S-87-640, Telcordia GR-20, RDUP PE-90

ALTOS® HD Gel-Free, All-Dielectric Cable with Binderless* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Environmental Conditions

Notes	Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.
Temperature Range, Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	96
Outer Jacket Color	Black
Outer Jacket Material	Polyethylene (PE)
Buffer Tube Color	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.7 mm (0.11 in)
Number of Active Tubes	4
Number of Filling Elements	2
Number of Tube Positions	6
Tape	Thin Film
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	24
Color Code Standards	Telcordia

Mechanical Specifications

Max. Tensile Strength, Long-Term	890 N (200.08 lbf)
Max. Tensile Strength, Short-Term	2700 N (606.98 lbf)
Nominal Outer Diameter	10.9 mm (0.43 in)
Min. Bend Diameter Installation	328 mm (12.91 in)
Min. Bend Diameter Operation	300 mm (11.81 in)

ALTOS® HD Gel-Free, All-Dielectric Cable with Binderless* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Optical Characteristics

Fiber Code	Z
Performance Option Code	22
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.22 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1

Dimensions

Cable Weight	75 kg/km (50.4 lb/1000 ft)
--------------	----------------------------



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.