


EDGE™ Solutions 24 F Y Harness 24 F MTP® (non-pinned) to 12 F MTP (pinned) MTP, Plenum, OS2, Type-9 polarity, 12 F leg length of 24 in (K), 10 ft

CORNING

Part Number:
HA98924GPH-K9010F

EDGE™ Solutions 24-fiber "Y" jumper is a preterminated assembly that provides the conversion from 24- to 12-fiber connectivity for full-fiber utilization of an existing Base-12 backbone. It is offered as a 1x2 MTP® assembly (one 24-fiber MTP connector on one end, two 12 F MTP connectors on the other), allowing breakout 100G port (Base-24) into 10 or 12, 10G duplex ports utilizing Base-12 MTP to LC modules utilizing Base-12 backbone.

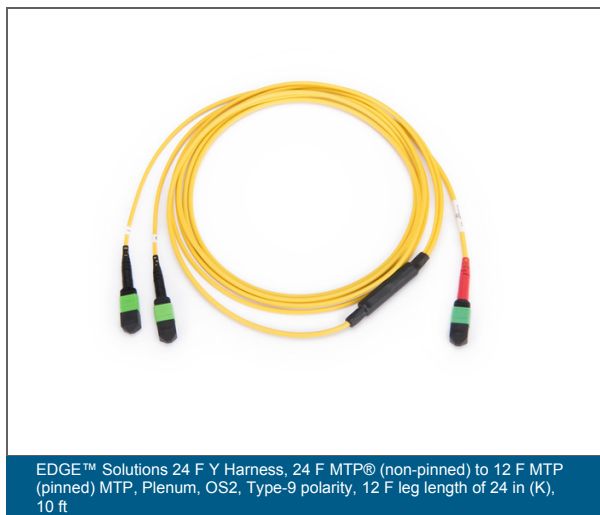

EDGE™ Solutions 24 F Y Harness, 24 F MTP® (non-pinned) to 12 F MTP (pinned) MTP, Plenum, OS2, Type-9 polarity, 12 F leg length of 24 in (K), 10 ft

EDGE™ Solutions 24 F Y Harness 24 F MTP® (non-pinned) to 12 F MTP (pinned) MTP, Plenum, OS2, Type-9 polarity, 12 F leg length of 24 in (K), 10 ft

CORNING

Specifications

General Specifications

Flame Rating	Plenum (OFNP)
Fiber Category	Bend-improved SM (OS2)
Cable Assembly Type	EDGE™ Harness
Application	Data Center, High-density Field Switches
Cable Type	Indoor: ANSI/ICEA S-83-596
Solution	EDGE
Connector Assembly Type	MTP to MTP

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
------------------------------	------------------------------------

Design

Fiber Count	24
Outer Jacket Material	Plenum
Polarity	Refer to AE Note 150

Mechanical Specifications

Nominal Outer Diameter	3.6 mm (0.14 in)
Max. Tensile Strength for Installation	220 N (49.46 lbf)
Min. Bend Radius Installation	36 mm (1.42 in)
Min. Bend Radius Operation	54 mm (2.13 in)

**EDGE™ Solutions 24 F Y Harness 24 F MTP®
(non-pinned) to 12 F MTP (pinned) MTP, Plenum,
OS2, Type-9 polarity, 12 F leg length of 24 in (K),
10 ft**

CORNING

Optical Characteristics

Fiber Code	Z
Performance Option Code	01
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1

Specifications - Connector A

Polish	APC
Insertion Loss, Max.	0.75 dB
Boot Color	Red
Connector Type	24 F MTP® (non-pinned)
Ferrule Material	Composite
Housing Color	Green

Specifications - Connector B

Polish	APC
Insertion Loss, Max.	0.35 dB
Boot Color	Black
Connector Type	12 F MTP® (pinned)
Ferrule Material	Composite
Housing Color	Green

Furcation - Connector A

Furcation Type	Heat Shrink
Leg Diameter	2.9 mm (0.11 in)

**EDGE™ Solutions 24 F Y Harness 24 F MTP®
(non-pinned) to 12 F MTP (pinned) MTP, Plenum,
OS2, Type-9 polarity, 12 F leg length of 24 in (K),
10 ft**

CORNING

Furcation - Connector A

Shortest Staggering Leg Length (mm)	609 mm (23.98 in)
-------------------------------------	-------------------

Dimensions

Length	10 ft
--------	-------

Ordering Information

Product Number	HA98924GPH-K9010F
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.