

# EDGE™ MTP® Trunk 50 µm multimode (OM4), MTP® Connector to MTP Connector, 96 F, with 33/ 33 inch legs, pulling grip one side, 100 ft

CORNING

**Part Number:**  
**G757596QPNDDU100F**

EDGE™ MTP® trunks provide the backbone of the EDGE solution. With non-pinned MTP connectors on both ends, these fiber trunk cable assemblies are designed to interface with the EDGE solutions or Plug & Play™ systems modules. All MTP trunks are manufactured with Corning® CleanAdvantage™, MTP trunk cables are shipped with strain-relief clips to allow easy tool-less installation.

## Features and Benefits

### **Snap-in strain-relief clips**

Provide easier cable management

### **Small outer diameter**

Improves cable tray fill ratio and allows for imported airflow

### **Low-loss connectivity**

Enables system design flexibility

### **Bend-improved fiber**


Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

### **Fiber optic trunk cable manufactured with Corning® CleanAdvantage™ technology and optimized dust cap**

Eliminates the need for scoping and cleaning prior to initial field connection

### **Non-pinned MTP connectors on both ends**

Fiber optic trunks designed to interface with the EDGE solutions or Plug & Play™ systems modules

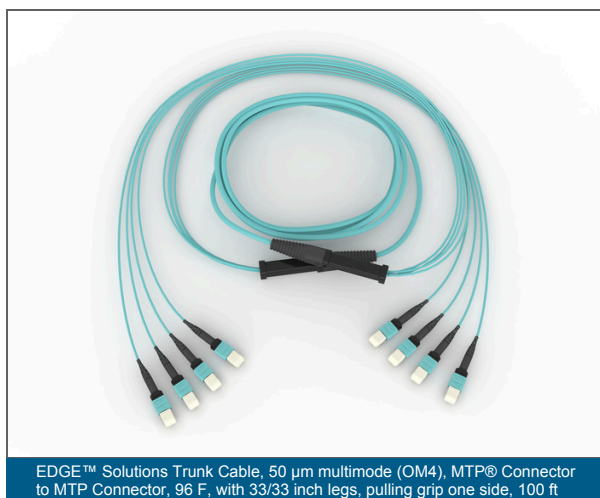

# EDGE™ MTP® Trunk 50 µm multimode (OM4), MTP® Connector to MTP Connector, 96 F, with 33/ 33 inch legs, pulling grip one side, 100 ft

CORNING

## Specifications

### General Specifications

|                         |                |
|-------------------------|----------------|
| Flame Rating            | Plenum (OFNP)  |
| Fiber Category          | 50 µm MM (OM4) |
| Cable Assembly Type     | EDGE™ Trunk    |
| Environment             | Indoor         |
| Pulling grip            | Yes            |
| Connector Assembly Type | MTP to MTP     |

### Standards

|                          |                                                                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Fiber Standards          | IEC 60793-2-10 for A1a class 50/125 multimode fibers; TIA/EIA 492AAAD (OM4); ITU-T Recommendation G.651; ISO/IEC 11801 Ed.2.2 Grade OM4 |
| Reaction to Fire         | Cca, s1b, d1, a1                                                                                                                        |
| RoHS                     | Free of hazardous substances according to RoHS 2011/65/EU                                                                               |
| Approvals and Listings   | NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6                                                                              |
| Design and Test Criteria | ANSI/ICEA S-83-596                                                                                                                      |

### Environmental Conditions

|                                 |                                    |
|---------------------------------|------------------------------------|
| Temperature Range, Installation | 0 °C to 50 °C (32 °F to 122 °F )   |
| Temperature Range, Operation    | -10 °C to 60 °C (14 °F to 140 °F ) |

### Design

|                            |                           |
|----------------------------|---------------------------|
| Fiber Count                | 96                        |
| Polarity                   | Universal, TIA-568 Type-B |
| Strain-Relief Bracket Type | 2                         |
| Fiber Type                 | Multimode                 |

# EDGE™ MTP® Trunk 50 µm multimode (OM4), MTP® Connector to MTP Connector, 96 F, with 33/ 33 inch legs, pulling grip one side, 100 ft

CORNING

## Mechanical Specifications

|                                        |                              |
|----------------------------------------|------------------------------|
| Nominal Outer Diameter                 | 11.9 mm (0.47 in )           |
| Max. Tensile Strength for Installation | 660 N (148.37 lbf)           |
| Min. Bend Radius Installation          | 178.5 mm (7.03 in)           |
| Min. Bend Radius Operation             | 59.5 mm (2.34 in)            |
| Weight                                 | 111 kg/km (74.59 lb/1000 ft) |
| Minimum Conduit Size with 18-in Elbow  | 76.2 mm (3 in)               |

## Optical Characteristics

|                                         |                          |
|-----------------------------------------|--------------------------|
| Fiber Code                              | T                        |
| Performance Option Code                 | 90                       |
| Fiber Category                          | OM4                      |
| Fiber Type                              | Multimode                |
| Fiber Name                              | 50 µm MM (OM4)           |
| Maximum Attenuation                     | 2.8 dB/km / 1.0 dB/km    |
| Wavelengths                             | 850 nm / 1300 nm         |
| Fiber Compliance                        | IEC 60793-2-10           |
| Fiber Core Diameter                     | 50 µm                    |
| Serial 1 Gigabit Ethernet               | 1000 m / 600 m           |
| Serial 10 Gigabit Ethernet              | 550 m / -                |
| Minimum Effective Modal Bandwidth (EMB) | 4700 MHz*km / -          |
| Min. Overfilled Launch (OFL) Bandwidth  | 3500 MHz*km / 500 MHz*km |

## Specifications - Connector A

|                      |                   |
|----------------------|-------------------|
| Insertion Loss, Max. | 0.25 dB           |
| Boot Color           | Black             |
| Connector Type       | MTP® (non-pinned) |
| Ferrule Material     | Composite         |
| Reflectance          | < -20 dB          |

**EDGE™ MTP® Trunk 50 µm multimode (OM4),  
MTP® Connector to MTP Connector, 96 F, with 33/  
33 inch legs, pulling grip one side, 100 ft**

CORNING

**Specifications - Connector B**

|                      |                   |
|----------------------|-------------------|
| Insertion Loss, Max. | 0.25 dB           |
| Boot Color           | Black             |
| Connector Type       | MTP® (non-pinned) |
| Ferrule Material     | Composite         |
| Reflectance          | < -20 dB          |

**Pulling Grip - Connector A**

|                     |                   |
|---------------------|-------------------|
| Pulling grip        | Yes               |
| Tensile Strength    | 440 N (98.92 lbf) |
| Grip Outer Diameter | 56 mm (2.2 in)    |

**Pulling Grip - Connector B**

|                         |                |
|-------------------------|----------------|
| Min. Duct Size Diameter | 89 mm (3.5 in) |
|-------------------------|----------------|

**Dimensions**

|              |                              |
|--------------|------------------------------|
| Length       | 100 ft -0 / +0.61m           |
| Cable Weight | 111 kg/km (74.59 lb/1000 ft) |

**Ordering Information**

|                    |                   |
|--------------------|-------------------|
| Product Number     | G757596QPNDDU100F |
| Packaging Method   | Plastic reel      |
| Reel Diameter      | 23.5 in           |
| Reel Width         | 5 in              |
| Units per Delivery | 1/1               |

# EDGE™ MTP® Trunk 50 µm multimode (OM4), MTP® Connector to MTP Connector, 96 F, with 33/ 33 inch legs, pulling grip one side, 100 ft

CORNING

## Cable Material

|                 |              |
|-----------------|--------------|
| Fiber Count     | 96           |
| Fiber Type      | OM4 MM       |
| Outer Diameter  | Standard     |
| Flame Rating    | Plenum       |
| Armor           | Non-armored  |
| Length          | 100          |
| Unit of Measure | Feet         |
| Cable Type      | Distribution |
| Fiber Mode      | Multimode    |

## CONNECTOR\_A\_1 Material

|                   |                     |
|-------------------|---------------------|
| Connector         | MTP® 12F Non-pinned |
| Connector Keying  | Non-Keyed           |
| Connector Loss    | Low Loss            |
| Connector Pinning | Non-Pinned          |

## CONNECTOR\_B Material

|                   |                     |
|-------------------|---------------------|
| Connector         | MTP® 12F Non-pinned |
| Connector Keying  | Non-Keyed           |
| Connector Pinning | Non-Pinned          |
| Connector Loss    | Low Loss            |

## Furcation A Material

|                |                                           |
|----------------|-------------------------------------------|
| Leg Length     | 33 in                                     |
| Leg Length     | 838 mm -0 / +76mm (32.99 in -0 / +2.99in) |
| Furcation Type | EDGE™ Size 2, 20 mm x 20 mm x 108.6 mm    |
| Leg Color      | Aqua                                      |
| Leg Diameter   | 2 mm (0.08 in)                            |

**EDGE™ MTP® Trunk 50 µm multimode (OM4),  
MTP® Connector to MTP Connector, 96 F, with 33/  
33 inch legs, pulling grip one side, 100 ft**

CORNING

**Furcation A Material**

|           |   |
|-----------|---|
| Leg Count | 8 |
|-----------|---|

**Furcation - Connector B**

|                |                                           |
|----------------|-------------------------------------------|
| Leg Color      | Aqua                                      |
| Furcation Type | EDGE™ Size 2, 20 mm x 20 mm x 108.6 mm    |
| Leg Diameter   | 2 mm (0.08 in)                            |
| Leg Length     | 838 mm -0 / +76mm (32.99 in -0 / +2.99in) |
| Leg Count      | 8                                         |
| Leg Length     | 33 in                                     |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.