

01 Executive summary

Revenue grew across all three regions. Retention improved in the West, while the South remains below the 95 percent target.


Quarterly business review · Q1–Q4 · three regions · revenue and retention.

02 Regional evidence

REGION	REVENUE	RETENTION	STATUS
North	184	94.1%	Watch
South	156	92.8%	Below target
West	211	95.0%	On plan

03 Analysis

Quarterly retention

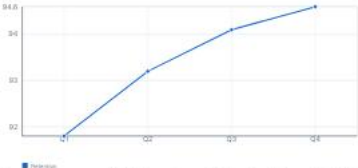

Line Chart: 4 rows · X Quarter · Y Retention · 2 fields

04 Decision



Proceed with monitored revenue recovery

Review

Close the South retention gap before the next review.

05 Decision and next step



Next step: close the South retention gap before the next quarterly review.

06 Performance

Regional revenue

551

Retention

94.6%

Quarterly retention

Before

91.8 %

After

94.6 %



Affected lot L2407 shows a localized die-level yield loss after ETCH-08 chamber A processing. Contain the lot until the chamber check and paired reference run confirm recovery.

Lot L2407 · ETCH-08 chamber A · affected die compared with a paired reference · release held for verification.

02 Engineering evidence



EVIDENCE	AFFECTED	REFERENCE	INTER
Yield distribution	94.2%	98.6%	Mean o
Affected lot L2407	94.2%	—	Localiz
ETCH-08 / A	Pressure +2.1%	Stable	Verify r

↔ Scroll right for more columns. Use Right Arrow, End, or swipe.


03 Corrective action

Contain lot L2407 through chamber requalification


Contain n

Release only after chamber A and the paired reference run confirm recovery.

04 Analysis

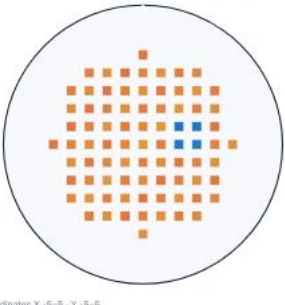


Wafer Map: 81 rows · X Die X · Y Die Y · 3 fields

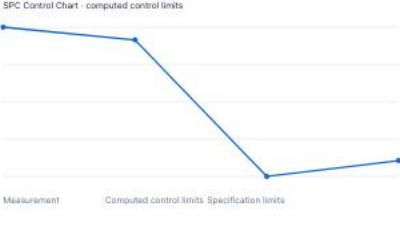

SPC Control Chart: 4 rows · X time · Y value · 8 fields

Control versus affected distribution

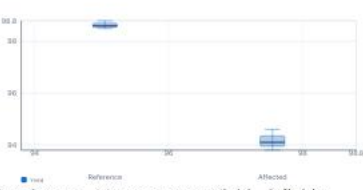

Box Plot: 6 rows · Measurement Yield · 2 fields

Verified finding

Finding · chamber A pressure drift aligns with the L2407 yield excursion.

Affected yield is 94.2% versus 98.6% reference. Contain L2407 and verify the matched chamber run before release.

05 Performance

Affected versus reference yield

Before
98.6 %

After
94.2 %

Affected yield

94.2%


01 Experiment summary

The treatment cohort improved conversion across four weeks. The quality guardrail remained inside its agreed range; the sample does not establish long-term retention.

Eligible new-account cohorts · W1–W4 · randomized control and treatment · conversion and quality guardrail.

02 Analysis

Conversion by week

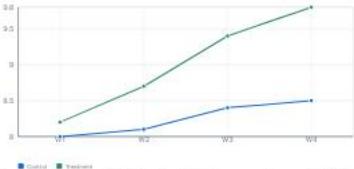

Line Chart: 8 rows · X Week · Y Conversion · 3 fields

Treatment conversion rose from 8.2% in week 1 to 9.8% in week 4; the control moved from 8.0% to 8.5%. The treatment distribution is higher across this sample, with all three cohort checks inside the quality guardrail. Continue only as a limited rollout because these four weeks do not establish long-term retention.

Outcome distribution by cohort



Box Plot: 8 rows · Measurement Conversion · 2 fields

03 Experiment evidence

Cohort evidence

COHORT	ELIGIBLE	CONVERSION	QUALITY GUARD
Control	1198	8.25%	Within quality guar

↔ Scroll right for more columns. Use Right Arrow, End, or swipe.

04 Recommendation



Stage a limited treatment rollout

Review

Pause expansion if the quality guardrail moves outside its agreed range.

05 Performance

Treatment conversion · Week 1 to 4

Before

8.2 %

After

9.8 %

Treatment conversion

9.8%


01 Operating summary

Shift B recovered yield after chamber maintenance. Keep the recipe locked through the next paired-lot check and hand off the evidence to Quality and Equipment Engineering.

Line 4 · shifts A–C · chamber A controls · capacity release review.

02 Analysis

Yield by shift

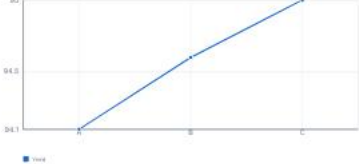

Line Chart: 3 rows · X Shift · Y Yield · 2 fields

SPC Control Chart · computed control limits · specifications shown



SPC Control Chart: 5 rows · X Time · Y Measurement · 4 fields

Yield recovered from 94.1% on shift A to 95.0% on shift C, while the control sample remains within specification. Keep the recipe locked until the next paired-lot check closes the two open items.

03 Response workflow



TOOL	CHAMBER	MEASURE	OWNER	STATUS
ETCH-08	A	Pressure	Equipment Eng.	Open
ETCH-07	C	Flow	Process Eng.	Stable
MET-02	B	Yield	Quality	Verified

↔ Scroll right for more columns. Use Right Arrow, End, or swipe.

Measurement system remains within the qualified reference range.

Sample: 30 parts · method: inline metrology · source: shift B inspection.

Evidence Verified

04 Decision

Hold added capacity until the paired-lot check closes [Review](#)
Keep the recipe locked and attach the next-shift control evidence.

05 Next steps

Complete chamber verification and update the runbook. [Active](#)

Owner: Equipment Engineering · due next shift · evidence: paired control lot.

06 Performance

First pass yield

95%

Unplanned downtime

8.3h

01 Overview

Order volume rose while returns fell across the spring launch.

Monthly operating review · Jan–Apr · Source: order and returns ledger.

02 Performance

April orders

1611

Order growth since January

331 orders

Monthly returns

Before

42

After

31




03 Analysis

Orders by month



Line Chart: 4 rows · X Month · Y Orders · 3 fields

Returns by month

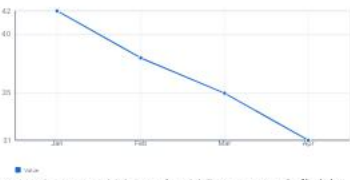

Line Chart: 4 rows · X Month · Y Returns · 3 fields

Order volume increased through the spring launch. Returns declined each month; continue weekly review while the fulfillment mix changes.

04 Evidence

Review path

Track order growth



Check return trend



Adjust capacity



Review fulfillment mix

Order and return evidence

MONTH	ORDERS	RETURNS
Jan	1280	42
Feb	1395	38
Mar	1522	35

05 Decision



Review rising orders alongside falling returns

Review

Check the fulfillment mix before changing the spring capacity plan.

06 Next steps



Next step: review the return mix before changing fulfillment capacity.

01 Situation

Keep Bridge C-08 closed until Span 4 crack gauge data is verified.

Overnight load testing cleared two required checks. The Span 4 crack gauge export has not synchronized; water level is still receding, so the reopening decision remains pending.

02 Disposition

Reopening gate



Do not reopen Bridge C-08 yet.

HOLD - one required result missing

The required Span 4 crack-gauge result is unavailable. Passing



Next step: synchronize the Span 4 gauge file, verify the crack trend, and repeat disposition before the 06:00 maintenance handover.

03 Inspection evidence

Overnight inspection record

LOCATION	OBSERVED LOAD	REQUIRED
Approach slab joint	1.34x	$\geq 1.25x$

↔ Scroll right for more columns. Use Right Arrow, End, or swipe.

Verified load checks

2 / 3 required