






Candidate 1: Low-SNR Robustness

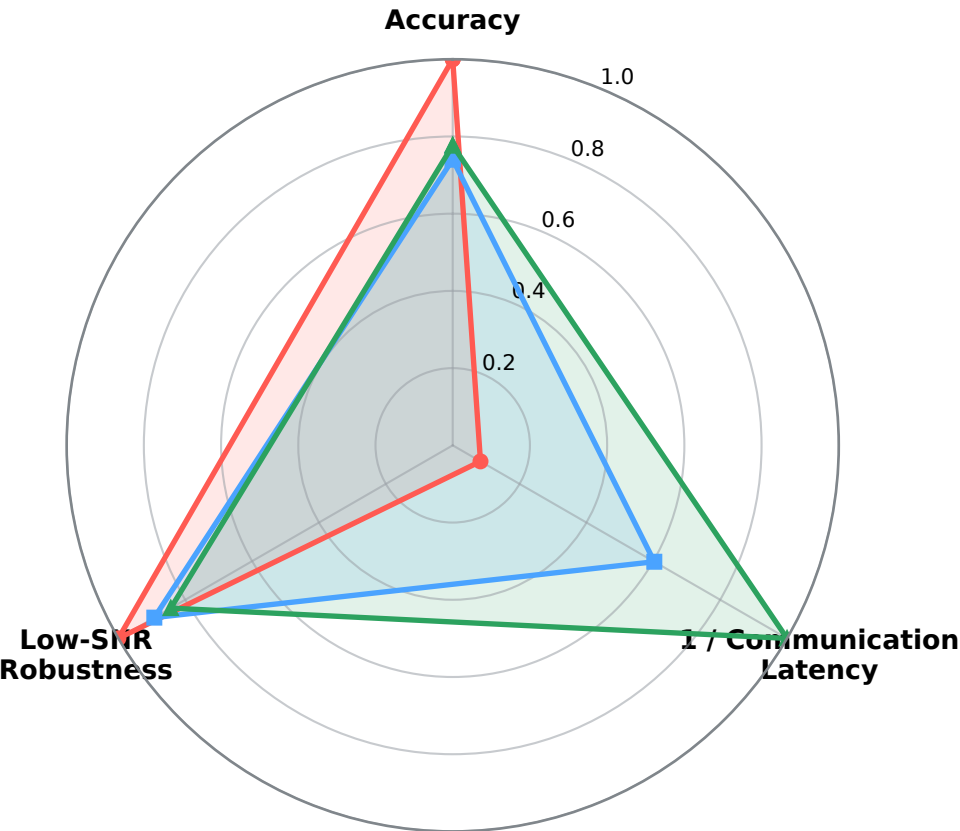


Candidate 2: Channel Robustness

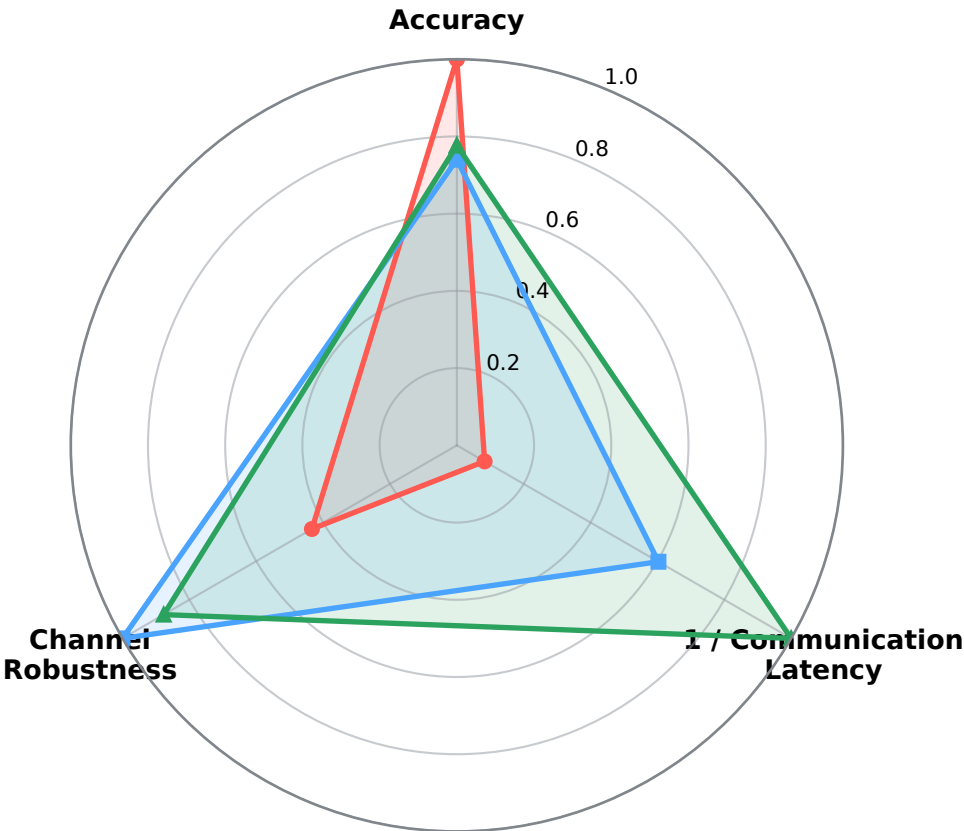

Candidate 3: Communication Efficiency

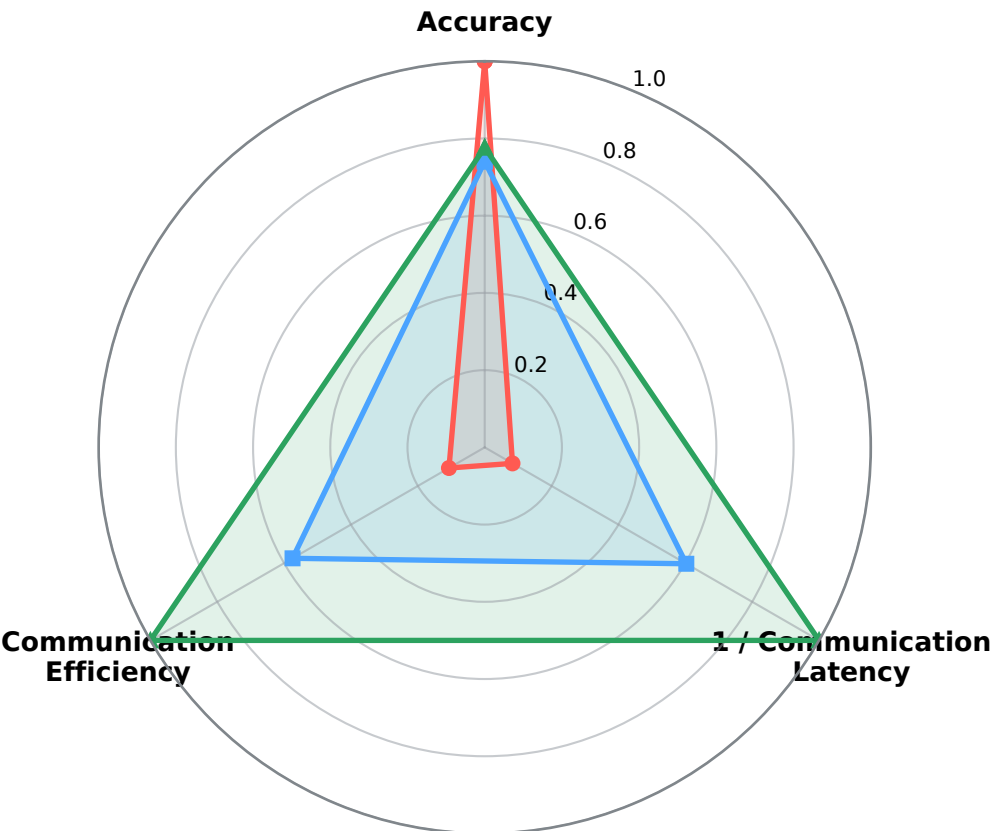

Candidate 4: Worst-Case Accuracy

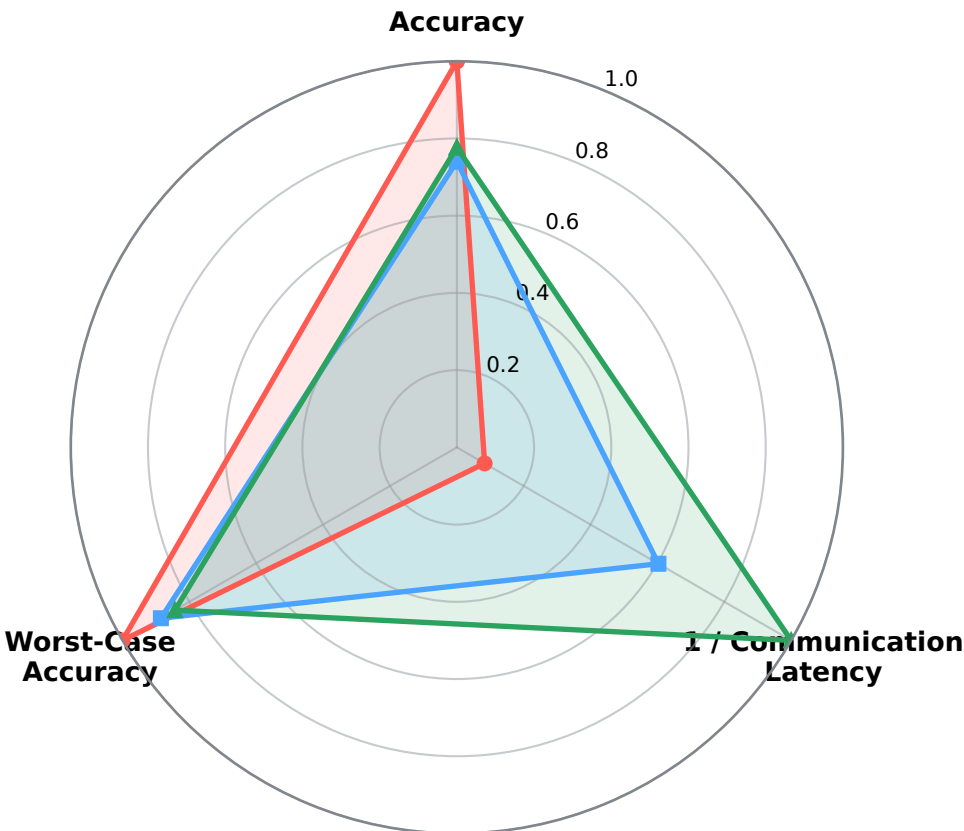

Higher is better on all axes. Communication latency is normalized from AWGN total MB. Candidate 2 uses inverse AWGN-Rayleigh final-accuracy gap.