






CIFAR-10 AWGN

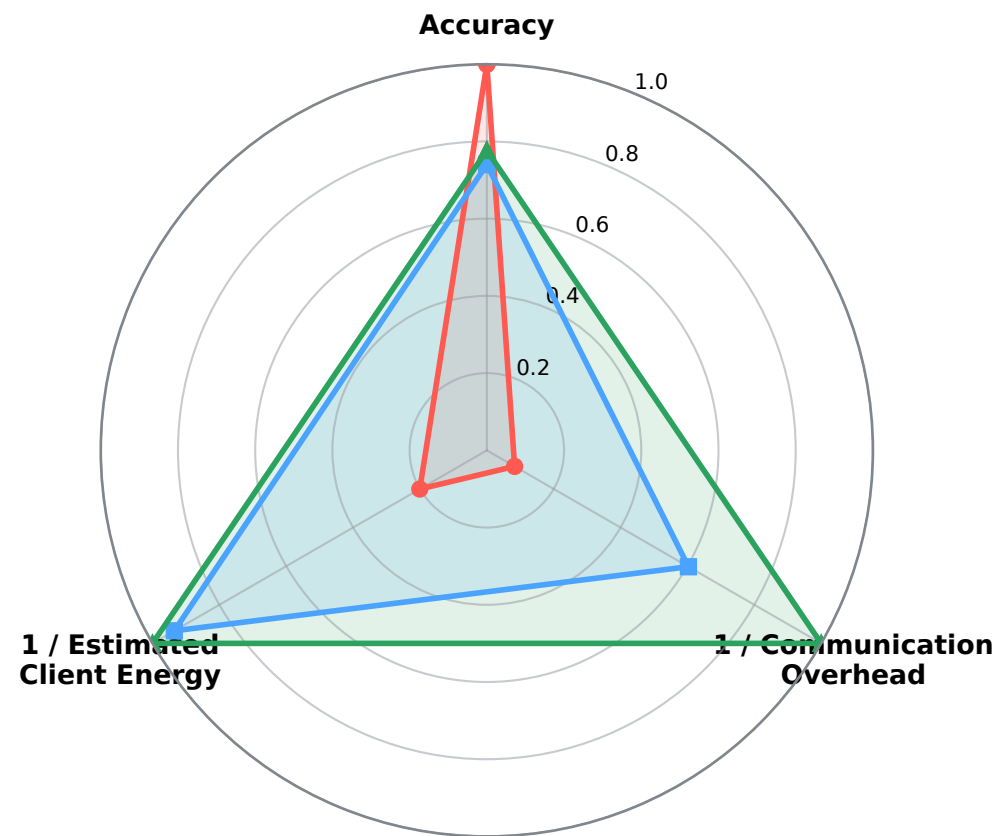


CIFAR-10 Rayleigh

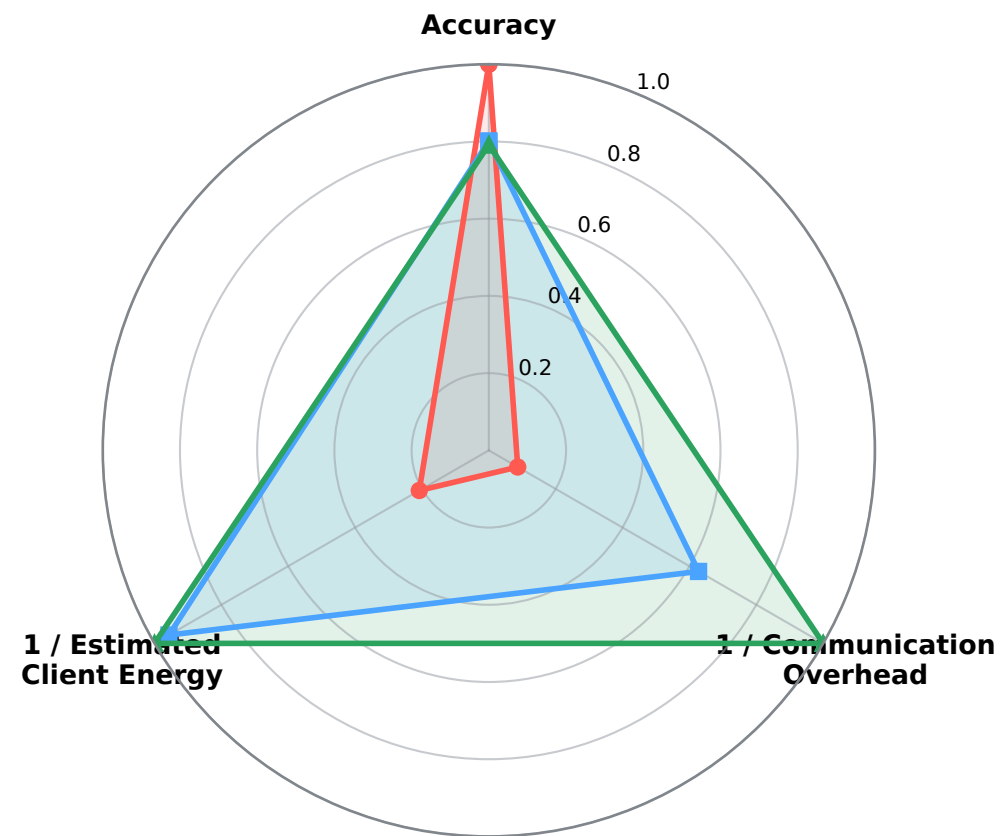

CIFAR-100 AWGN

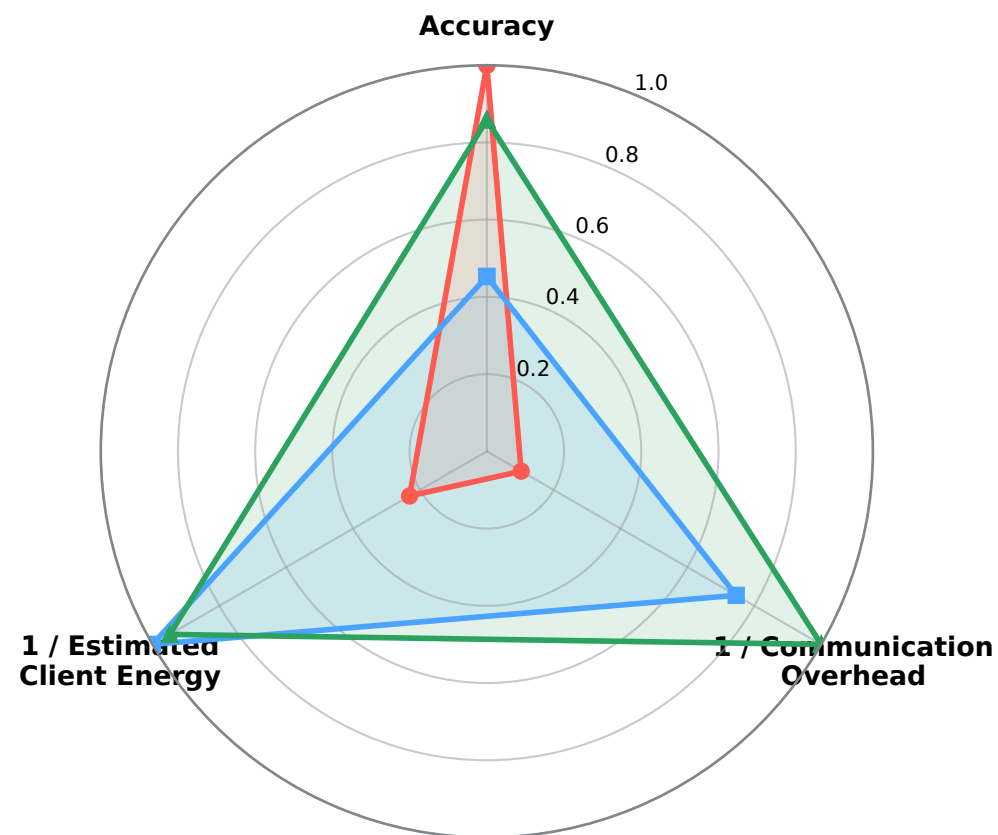

CIFAR-100 Rayleigh

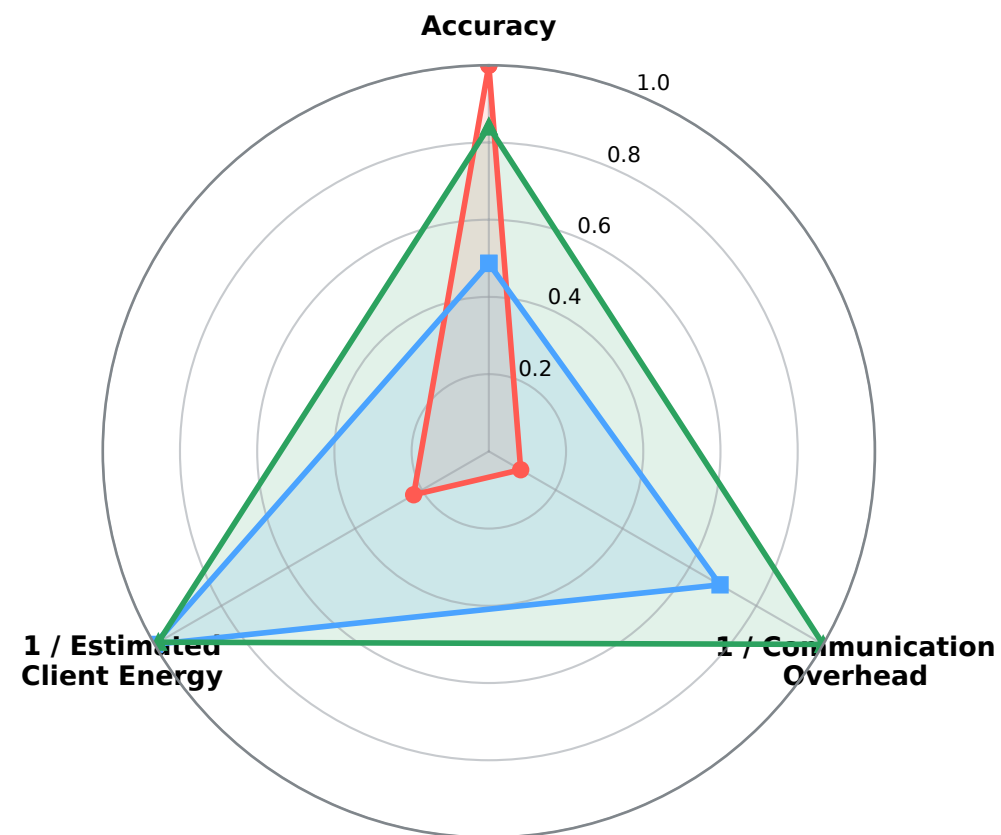

Higher is better on all axes. The energy axis uses an estimated client-energy proxy:
 $0.5 \times \text{normalized communication overhead} + 0.5 \times \text{normalized computation cost}$.