

Weekly_MT_20250515



- Gas study with test chamber : 来週までにまとめます。
- Status of E80-CDC : No progress、new test chamberで目指すもの
- ToDo list
- Schedule

Gas study w/ test chamber : status update

Ar-CO₂, 90Sr, TDC : **Check of reproducibility** by rough efficiency

$$WE_{\text{eff}} = \frac{(\text{hit6 or hit9}) \text{ and } (\text{hit(7,8)} \text{ and } \text{!hit(4,5,10,11)})}{\text{hit(7,8)} \text{ and } \text{!hit(4,5,10,11)}}$$

(only using the hits with TOT greater than 30 [ch])

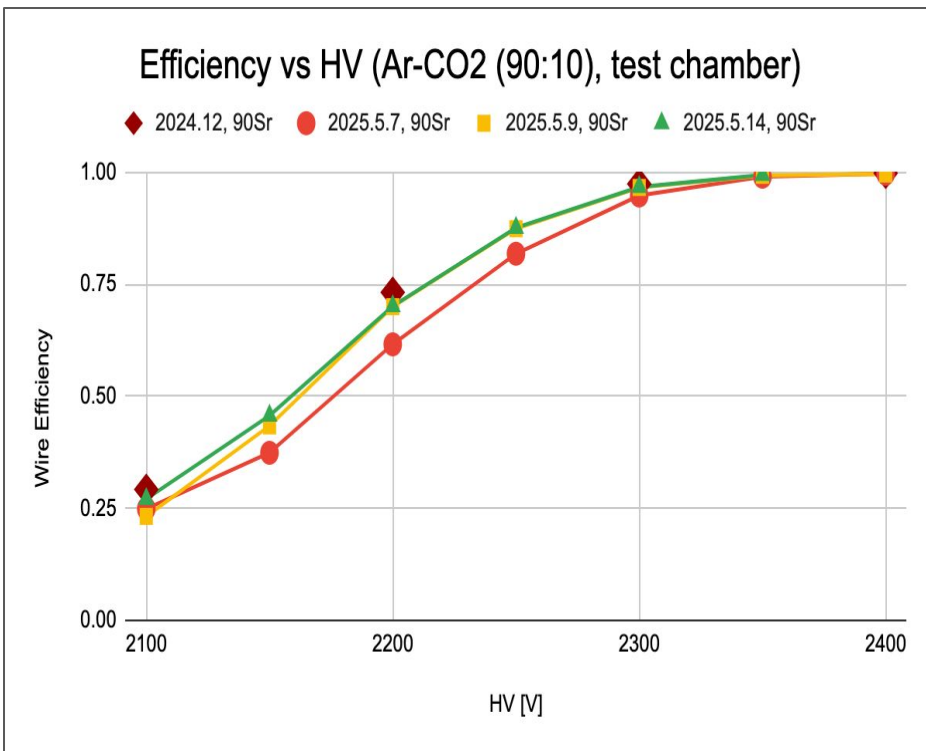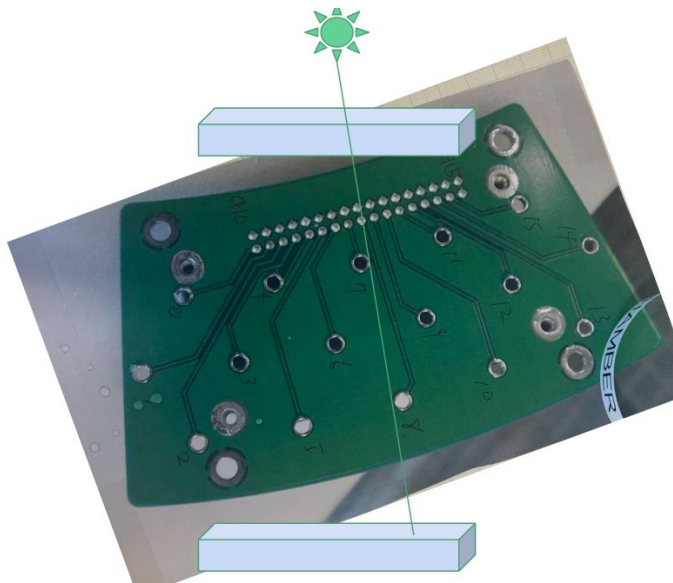

E80-CDC: status

- No progress
- HV commissioning , next week

- New test chamber; Plan

memo

線源



Yuto Kimura 16:38

- CDCよりも扱いやすい。

--> ワイヤーが長いことによる信号の特徴を理解する。(信号発生位置依存→プリアンプの時定数決定に影響) (edited)



16:39

- ASAGIのテスト用

(edited)

比較としては

- ArC2H6、長いvs普通
- ArC2H6、SONY vs ASAGI

ToDo list

- J-PARC Sympo proceedings : waiting for the referee replying

Referee's Report

This paper reports on a study of the chamber gas for the Cylindrical Detector System (CDS), a key detector to be used in the J-PARC E80 experiment scheduled to begin in 2027, which aims to search for the KNNN bound state. In the previous experiment, E15, Ar-C₂H₆ (50:50) gas was used. However, since this is a flammable gas and the size of the CDC will be three times larger in E80, a non-flammable gas was sought as an alternative. Using the gas simulation tool Garfield++, the drift velocity and gain were evaluated, and Ar-CO₂ (90:10) was determined to be the optimal choice. Cosmic-ray tests and data analysis confirmed that sufficient resolution and detection efficiency could be achieved with this gas mixture.

This paper clearly and systematically describes the gas study in detail and can be considered to have reached a publishable level.

Minor comments:

There is an inconsistency between the dimensions shown in Figure 2 and those described in the text. The figure lists an inner diameter of 330 mm, while the text mentions an inner radius of 150 mm. Also, the figure shows a length of 2680 mm, whereas the text states 2580 mm. Even if they are referring to different lengths, it would be clearer to standardize or clarify this discrepancy.

It is stated that the results in Figure 5 agree well with the Garfield++ simulations, but it would be helpful to include a quantitative comparison—either in the figure or in the text—showing how closely the two results match.

In the upper part of Figure 6, "Cosimc-ray" should be corrected to "Cosmic-ray."

Regarding the references: if there is a publication detailing the CDC used in the E15 experiment, which was also used in the cosmic-ray test, it should be cited. Additionally, it would be helpful to include at least a web link or pointer to the Garfield++ resource.

There are no major issues with the English, but if necessary, the manuscript could be submitted for professional proofreading.

ToDo list

- J-PARC Sympo proceedings : waiting for the referee replying

Reply Review Report	
Revised Manuscript	[Revised Manuscript (PDF)]
Reply / Message to the Editor	
Reply to the referee's Report	<p>We sincerely thank the referee for their careful reading and valuable comments. We have revised the manuscript accordingly, and our responses to each point are as follows:</p> <p>1. -- Inconsistency in dimensions between Figure 2 and the text -- We have corrected the inconsistency: the inner diameter in the figure has been updated to 300 mm, corresponding to the inner radius of 150 mm described in the text. Regarding the length, we have clarified in the revised text and the caption that 2580 mm refers to the active length of the CDC, while 2680 mm in the figure indicates the total mechanical length.</p> <p>2. -- Quantitative comparison between Figure 5 and Garfield++ simulations -- We have added a quantitative comparison between the experimental data and the Garfield++ simulation results in the revised text. Specifically, we included examples of the gas gain values obtained from the simulations, and showed that the relative behavior of the gas gain between Ar-CO₂ and Ar-C₂H₆ is consistent with the experimental results.</p> <p>3. -- Typo in Figure 6 ("Cosimc-ray") -- The typo has been corrected to "Cosmic-ray" in Figure 6.</p> <p>4. -- Reference to the E15 CDC and Garfield++ -- We have added a reference to the publication describing the CDC used in the E15 experiment [Ref. 3], which is used in the beam test run in J-PARC. Furthermore, we have included a footnote with the official Garfield++ website link.</p>

ToDo list

- DC2 : ver.0 → rewriting now/, deadline is 2025/5/19(Mon).

Schedule

- 2025.5.16 夜: Saitama
- 2025.5.21 ~ :Tokai

Back Up

Gas study short summary

Ar-CO₂(90:10) and Ar-C₂H₆(50:50)
→ Ar-CO₂ and Ar-C₂H₆, omitted gas ratio

Ar-C ₂ H ₆	⁵⁵ Fe	⁹⁰ Sr	Cosmic
test chamber	Gas Gain(Our standard)	ToT, Efficiency	Took data 2025.4
E15-CDC	None	None	ToT, Efficiency

Ar-CO ₂	⁵⁵ Fe	⁹⁰ Sr	Cosmic
test chamber	Gas Gain(Our standard)	ToT , Efficiency (small..)	Now data-taking (continue ~this Friday)
E15-CDC	None	None	ToT, Efficiency (very small..)


- In Ar-CO₂ case, ToT of ⁹⁰Sr is relatively smaller than that of the Ar-C₂H₆ case, when comparing the same gas gain point.
- Checking Cosmic-ray data, the difference becomes even more serious.
- The Ar-CO₂ gas mixture shows broader QDC and ToT spectra, and exhibits more noise than Ar-C₂H₆, resulting in lower detection efficiency, even under sufficiently high voltage.

Gas study w/ test chamber : status update

Data taking with **Ar-C₂H₆(50:50)** was completed Apr. 2025.

→ Now **Ar-CO₂(90:10)** data taking, until next Friday.

- Condition when taking TDC data
 - ASD Vth = -1.5 V
 - Trig counter (up, thickness= ~ 0.5 mm)
 - PMT(KA88??) HV = 1600V
 - NIM Discr Vth = - 25mV
 - Trig counter (down, thickness= ~ 5 mm)
 - PMT(KA88??) HV = 1300V
 - NIM Discr Vth = - 25mV
 - Trig Rate (Coincidence rate of the two trig counters) = ~ 300 Hz
 - Gas Flow
 - 2024.12 : maybe 30~50ml/min
 - 2025.4 : 10~25ml/min

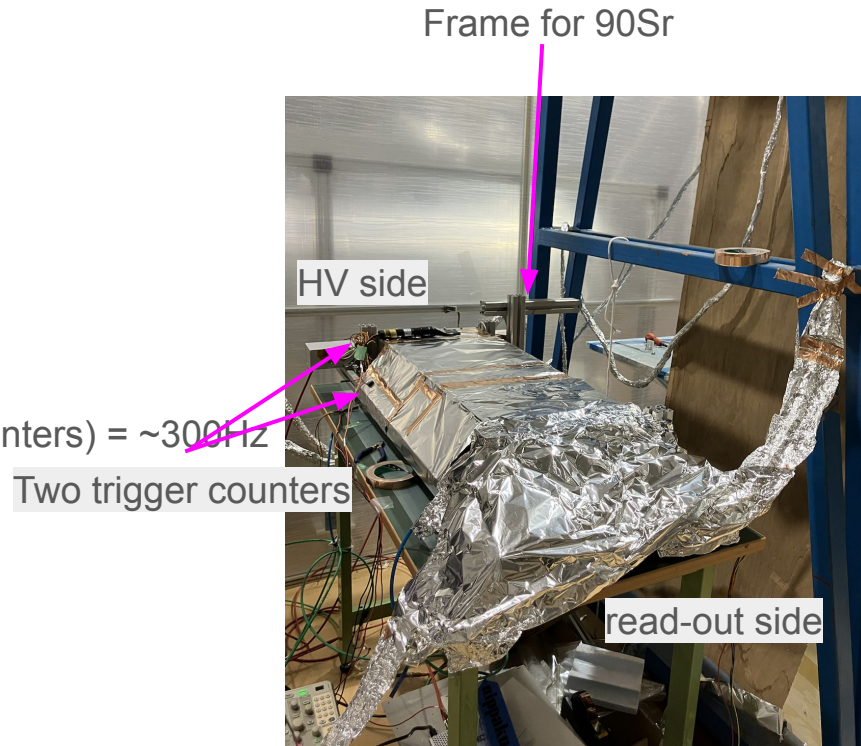

What we need for test chamber @RIKEN

- ASAGI, 変換基板, ASAGA sys用cable? → 白鳥さん??
- HUL & DTL
- Normal test chamber → RIKEN(後回しか?)
- SONY ASD, 変換基板
- Repeater : ×1 アナログ信号見るだけなら要らない。
- Power Supply
 - CAENクレート (Pot Wire用)
 - for repeater (SONY ASD用)
 - 5.29V : ×1
 - 5.49V, 1.02A : ×1
 - for ASAGI
 - +5.0V, 0.5A : ×1
 - for SONY ASD
 - +3.0V, 0.38A : ×1
 - -3.0V, 0.13A : ×1
 - Vth 1~10V, 0~0. A : ×1
- Gas system
 - Ar-C2H6 : ×1
 - レギュレータ(可燃) : ×1
 - Flow meter (needle式) : ×1
 - 1/4ガスチューブ
 - バブラー, 油 : ×1
- Cable
 - SONY ASD用
 - 6m flat cable : ×1
 - 16ch×2 <-> 32ch flat cable : ×1
- NIMビン、モジュール式
 - 赤HV, clock, discr, divider, coin, fan-in-fan-out, gate-generator, scaler, ECL->NIM (NIM->ECLも欲しい...) etc...

Ar-CO2 vs Ar-C2H6のまとめ

Long vs Original (Ar-C2H6)のまとめを作れ。

木村は何を見たいのか、リストアップせよ。