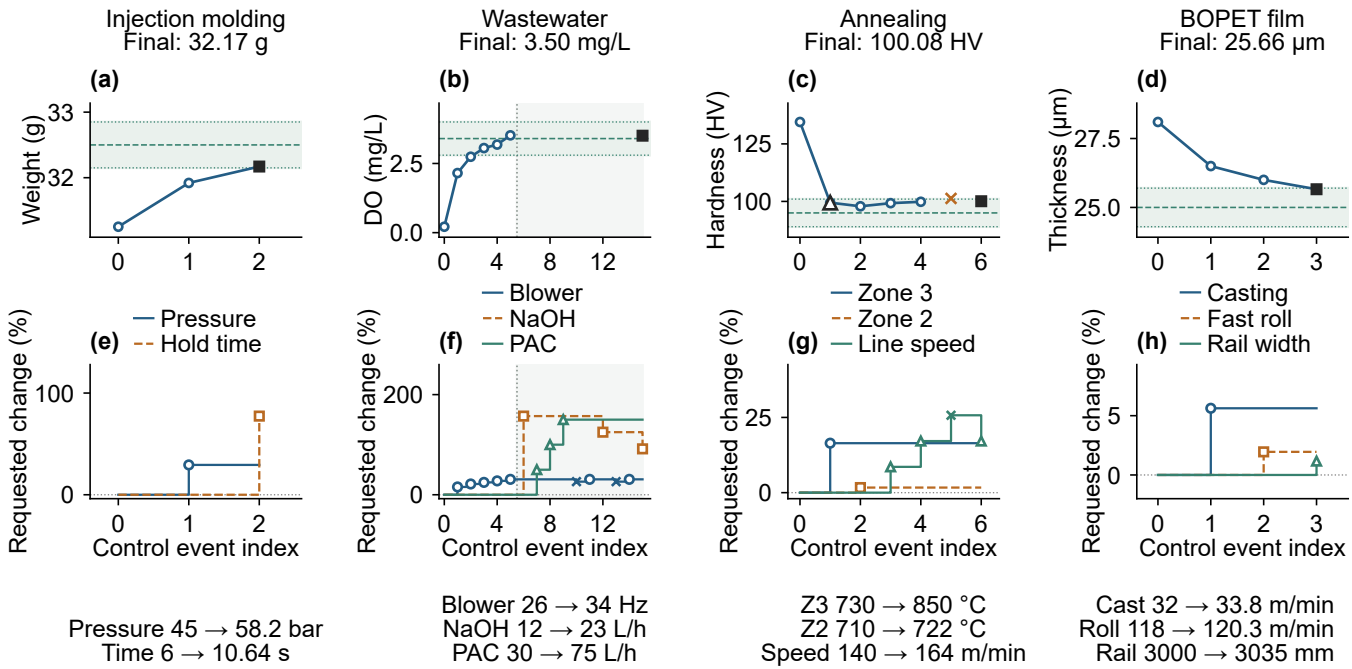
Injection molding
Final: 32.17 g
Wastewater
Final: 3.50 mg/L
Annealing
Final: 100.08 HV
BOPET film
Final: 25.66 µm
(a)
(b)
(c)
(d)
Weight (g)
DO (mg/L)
Hardness (HV)
Thickness (µm)
(e)
(f)
(g)
(h)
Pressure
Hold time
Blower
NaOH
PAC
Zone 3
Zone 2
Line speed
Casting
Fast roll
Rail width
Requested change (%)
Control event index
Pressure 45 → 58.2 bar
Time 6 → 10.64 s
Blower 26 → 34 Hz
NaOH 12 → 23 L/h
PAC 30 → 75 L/h
Z3 730 → 850 °C
Z2 710 → 722 °C
Speed 140 → 164 m/min
Cast 32 → 33.8 m/min
Roll 118 → 120.3 m/min
Rail 3000 → 3035 mm