

REPORT LAB

EMBEDDED SYSTEM - CO3054

Group: CC02


Student: Dương Gia An – 1952163

Contents


I. INTRODUCTION TO ESP32 AND ESP-IDF	2
1. After install ESP-IDF extension on VS code, I create a project with HelloWorld Template.	2
2. Build the Project and connect ESP32 (COM3).	2
3. Flash (UART) project code to ESP32 by Press BOOT button on ESP32 while Flashing.	3
4. Press Monitor Device to see ESP execute flashed code.	4
II. ESP32 GPIO AND FREERTOS TASK	5
Code in file main.c	5
Link Github: CO3054_ES_LAB/LAB1 at main · kinggiaan/CO3054_ES_LAB (github.com)	6
<i>Explain:</i>	6
<i>Result:</i>	7

I. INTRODUCTION TO ESP32 AND ESP-IDF

1. After install ESP-IDF extension on VS code, I create a project with HelloWorld Template.

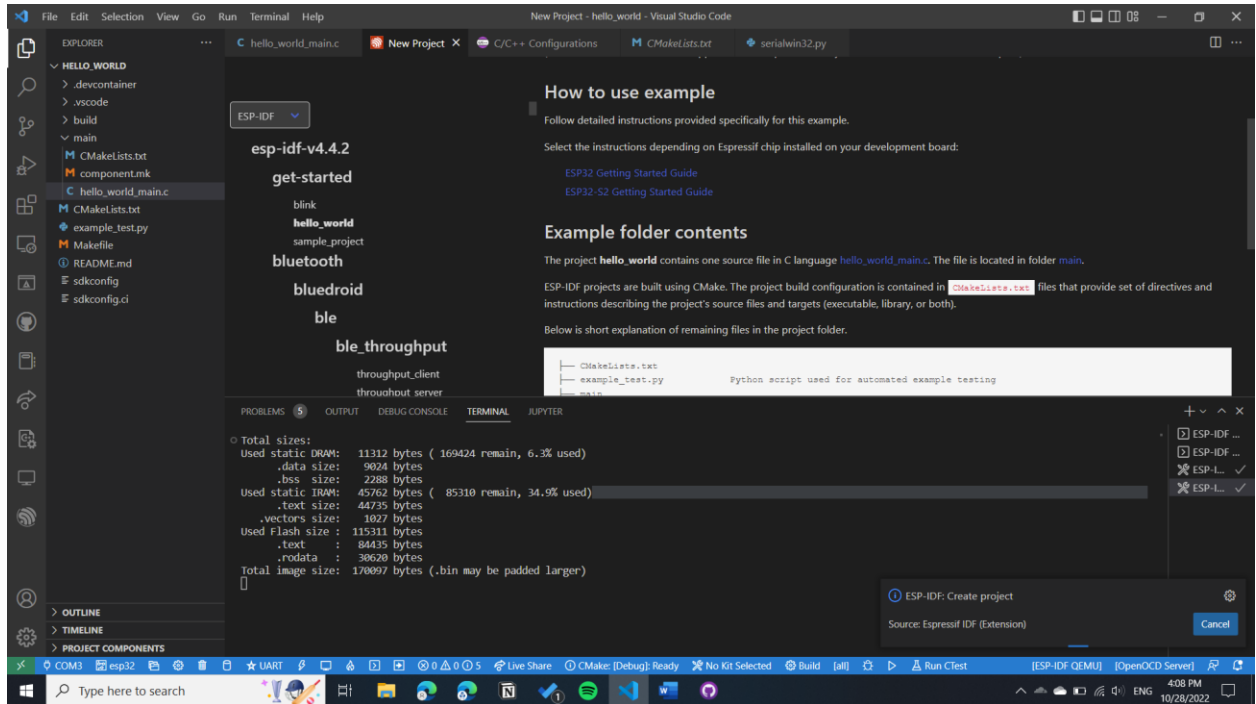

2. Build the Project and connect ESP32 (COM3).

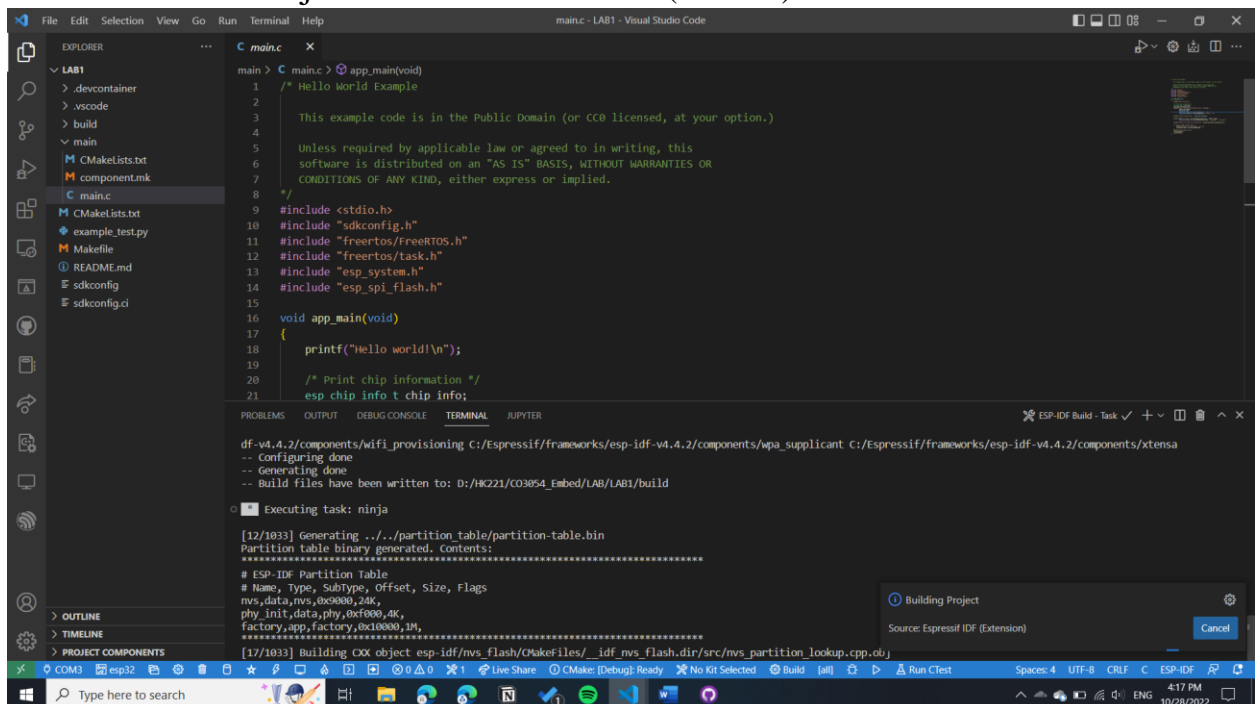

Finished Build

```
○ * Executing task: C:/Espressif/python_env/idf4.4_py3.8_env/Scripts/python.
bed\LAB\LAB1\build\LAB1.map
```

Total sizes:

Used static DRAM: 11312 bytes (169424 remain, 6.3% used)

.data size: 9024 bytes

.bss size: 2288 bytes

Used static IRAM: 45790 bytes (85282 remain, 34.9% used)

.text size: 44763 bytes

.vectors size: 1027 bytes

Used Flash size : 115471 bytes

.text : 84459 bytes

.rodata : 30756 bytes

Total image size: 170285 bytes (.bin may be padded larger)

3. Flash (UART) project code to ESP32 by Press BOOT button on ESP32 while Flashing.

```
loader/bootloader.bin 0x10000 LAB1.bin 0x8000 partition_table/partition-table.bin

esptool.py v3.3.2-dev
Serial port COM3
Connecting...
Chip is ESP32-D0WDQ6 (revision 1)
Features: WiFi, BT, Dual Core, 240MHz, VRef calibration in efuse, Coding Scheme None
Crystal is 40MHz
MAC: 24:62:ab:d6:ef:e8
Uploading stub...
Running stub...
Stub running...
Changing baud rate to 460800
Changed.
Configuring flash size...
Auto-detected Flash size: 4MB
Flash will be erased from 0x00001000 to 0x00007fff...
Flash will be erased from 0x00010000 to 0x00039fff...
Flash will be erased from 0x00008000 to 0x00008fff...
Flash params set to 0x0220
Compressed 25392 bytes to 15887...
Wrote 25392 bytes (15887 compressed) at 0x00001000 in 0.7 seconds (effective 276.5 kbit/s)..
Hash of data verified.
Compressed 170416 bytes to 89840...
Wrote 170416 bytes (89840 compressed) at 0x00010000 in 2.3 seconds (effective 582.9 kbit/s)..
Hash of data verified.
Compressed 3072 bytes to 103...
Wrote 3072 bytes (103 compressed) at 0x00008000 in 0.1 seconds (effective 435.1 kbit/s)...
Hash of data verified.

Leaving...
Hard resetting via RTS pin...
```

4. Press Monitor Device to see ESP execute flashed code.

```
I (0) cpu_start: App cpu up.
I (215) cpu_start: Pro cpu start user code
I (215) cpu_start: cpu freq: 160000000
I (215) cpu_start: Application information:
I (220) cpu_start: Project name:    LAB1
I (224) cpu_start: App version:    1
I (229) cpu_start: Compile time:   Oct 28 2022 16:18:00
I (235) cpu_start: ELF file SHA256: bb91ad4dc51ae3e0...
I (241) cpu_start: ESP-IDF:       v4.4.2-dirty
I (247) heap_init: Initializing. RAM available for dynamic allocation:
I (254) heap_init: At 3FFAE6E0 len 00001920 (6 KiB): DRAM
I (260) heap_init: At 3FFB2C30 len 0002D3D0 (180 KiB): DRAM
I (266) heap_init: At 3FFE0440 len 00003AE0 (14 KiB): D/IRAM
I (272) heap_init: At 3FFE4350 len 0001BCB0 (111 KiB): D/IRAM
I (279) heap_init: At 4008B2E0 len 00014D20 (83 KiB): IRAM
I (286) spi_flash: detected chip: generic
I (290) spi_flash: flash io: dio
I (295) cpu_start: Starting scheduler on PRO CPU.
I (0) cpu_start: Starting scheduler on APP CPU.
Hello world!
This is esp32 chip with 2 CPU core(s), WiFi/BT/BLE, silicon revision 1, 4MB external flash
Minimum free heap size: 295180 bytes
Restarting in 10 seconds...
Restarting in 9 seconds...
Restarting in 8 seconds...
Restarting in 7 seconds...
Restarting in 6 seconds...
```

II. ESP32 GPIO AND FREERTOS TASK

Code in file **main.c**

```
1. #include <stdio.h>
2. #include "sdkconfig.h"
3. #include "freertos/FreeRTOS.h"
4. #include "freertos/task.h"
5. #include "esp_system.h"
6. #include "esp_spi_flash.h"
7.
8.
9. void print_id(void *pvParameter){
10.     while(1){
11.         printf("DUONG GIA AN : %d \n",1952163);
12.         vTaskDelay(1000/portTICK_PERIOD_MS);
13.
14.     }
15.     vTaskDelete(NULL);
16.
17. }
18.
19. void blinky(void *pvParameter){
20.     while(1){
21.         printf("Press Button\n");
22.         int rd = rand() % (5000 + 1 - 0) + 0;
23.         vTaskDelay(rd /portTICK_PERIOD_MS);
24.     }
25.     vTaskDelete(NULL);
26. }
27.
28.
29. void app_main(){
30.     xTaskCreate(&print_id, "print_id", 2048, NULL, 0, NULL);
31.     xTaskCreate(&blinky, "blinky", 2048,NULL,0,NULL );
32.
33.     for (int i = 20; i >= 0; i--) {
34.         printf("Remaing %d seconds...\n", i);
35.         vTaskDelay(1000 / portTICK_PERIOD_MS);
36.     }
```

```
37. printf("Restarting now.\n");
38. vTaskDelay(5000 / portTICK_PERIOD_MS);
39. fflush(stdout);
40. esp_restart();
41. }
```

Link Github: [CO3054 ES LAB/LAB1 at main · kinggiaan/CO3054 ES LAB \(github.com\)](https://github.com/kinggiaan/CO3054_ES_LAB)

Explain:

- Cyclic task: void **print_id()** is task that print my student ID every 2 seconds.
- Acyclic task: void **Blinky()** is alternated for button in GPIO in ESP32. I change to a random time to press button from 0 – 5000ms.
- **app_main()** will print time stamp every 1 second and restart ESP after 20 seconds.

The *priority* and *usStackDepth* of task cyclic/acyclic is the same as 0 and 2048 (mean 2048×4 bytes will be allocated for these tasks).

Result:

```
PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  JUPYTER

I (295) cpu_start: Starting scheduler on PRO CPU.
I (0) cpu_start: Starting scheduler on APP CPU.
Remaing 20 seconds...
DUONG GIA AN : 1952163
Press Button
DUONG GIA AN : 1952163
Remaing 19 seconds...
DUONG GIA AN : 1952163
Remaing 18 seconds...
DUONG GIA AN : 1952163
Remaing 17 seconds...
DUONG GIA AN : 1952163
Remaing 16 seconds...
Press Button
DUONG GIA AN : 1952163
Remaing 15 seconds...
Press Button
DUONG GIA AN : 1952163
Remaing 14 seconds...
DUONG GIA AN : 1952163
Remaing 13 seconds...
Press Button
DUONG GIA AN : 1952163
Remaing 12 seconds...
DUONG GIA AN : 1952163
Remaing 11 seconds...
DUONG GIA AN : 1952163
Remaing 10 seconds...
Press Button
DUONG GIA AN : 1952163
Remaing 9 seconds...
█
```