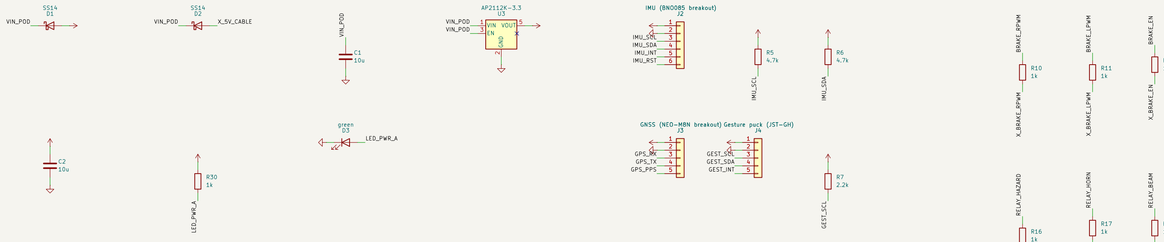

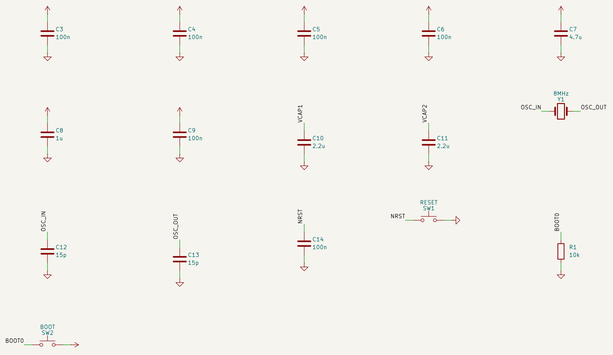
## POWER: USB VBUS OR cable +5 V → 3.3 V



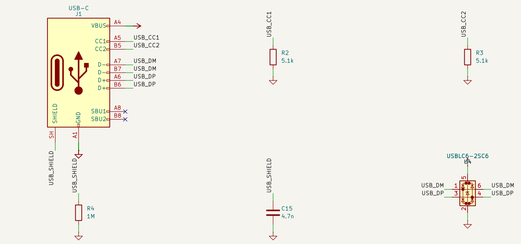

## MCU: STM32F405RGT6




## MCU support: decoupling, crystal, reset, boot



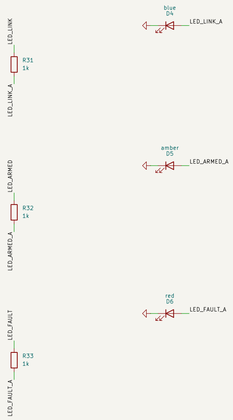

## USB-C to the laptop



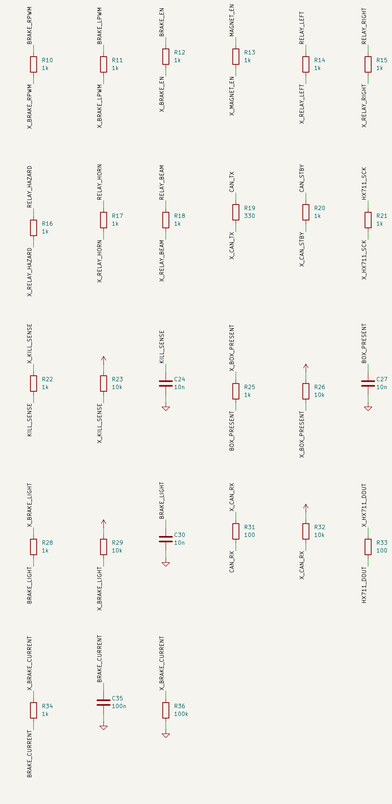

## Sensors and local connectors




## Status LEDs (driver-facing edge)





## Cable line conditioning




## Mounting




## Inter-box cable (DB-25), series resistors and input filters







Generated by hardware/gen; see BUILD_GUIDE Part 4.8
AR Windscreen FYP — Kiogora Ian Mwenda
Sheet: /
File: pod_board.kicad_sch
Title: Windscreen pod board (MCU, sensors, USB, cable)
Size: A1 | Date: 2026-10-06 | Rev: 1
KiCad E.D.A. 10.0.1 | Id: 1/1