




12 V input: fuse, TVS, reverse-polarity diode

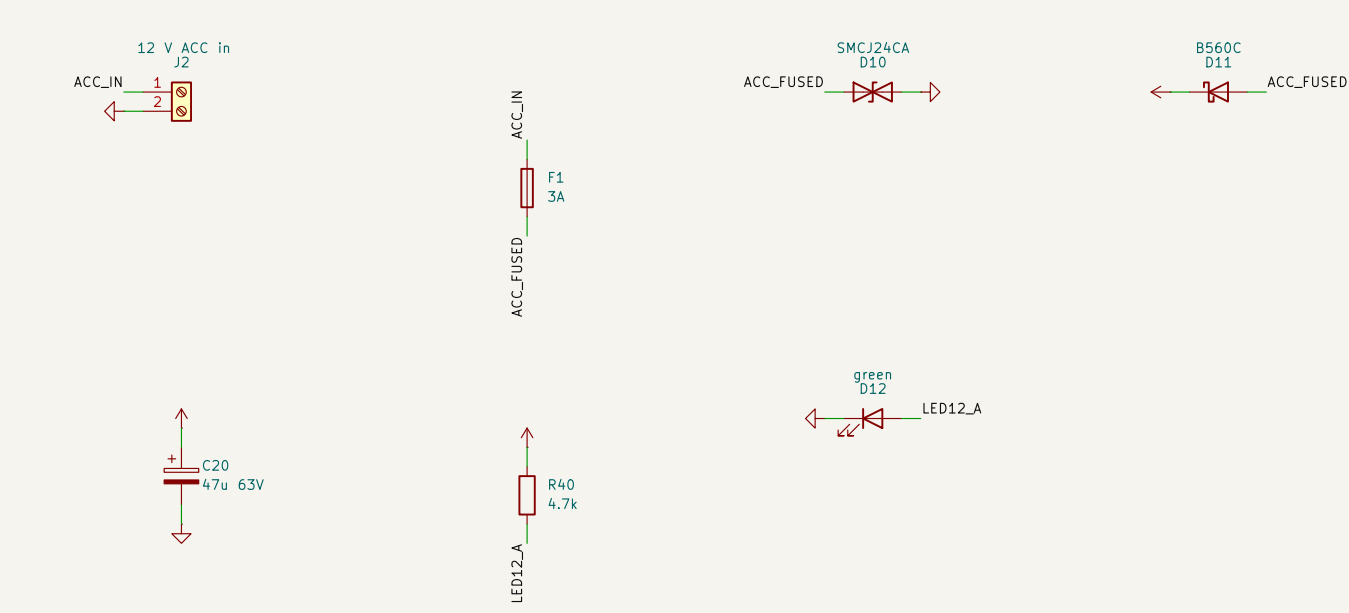


5 V: TPS54360 (TI reference design, 600 kHz)

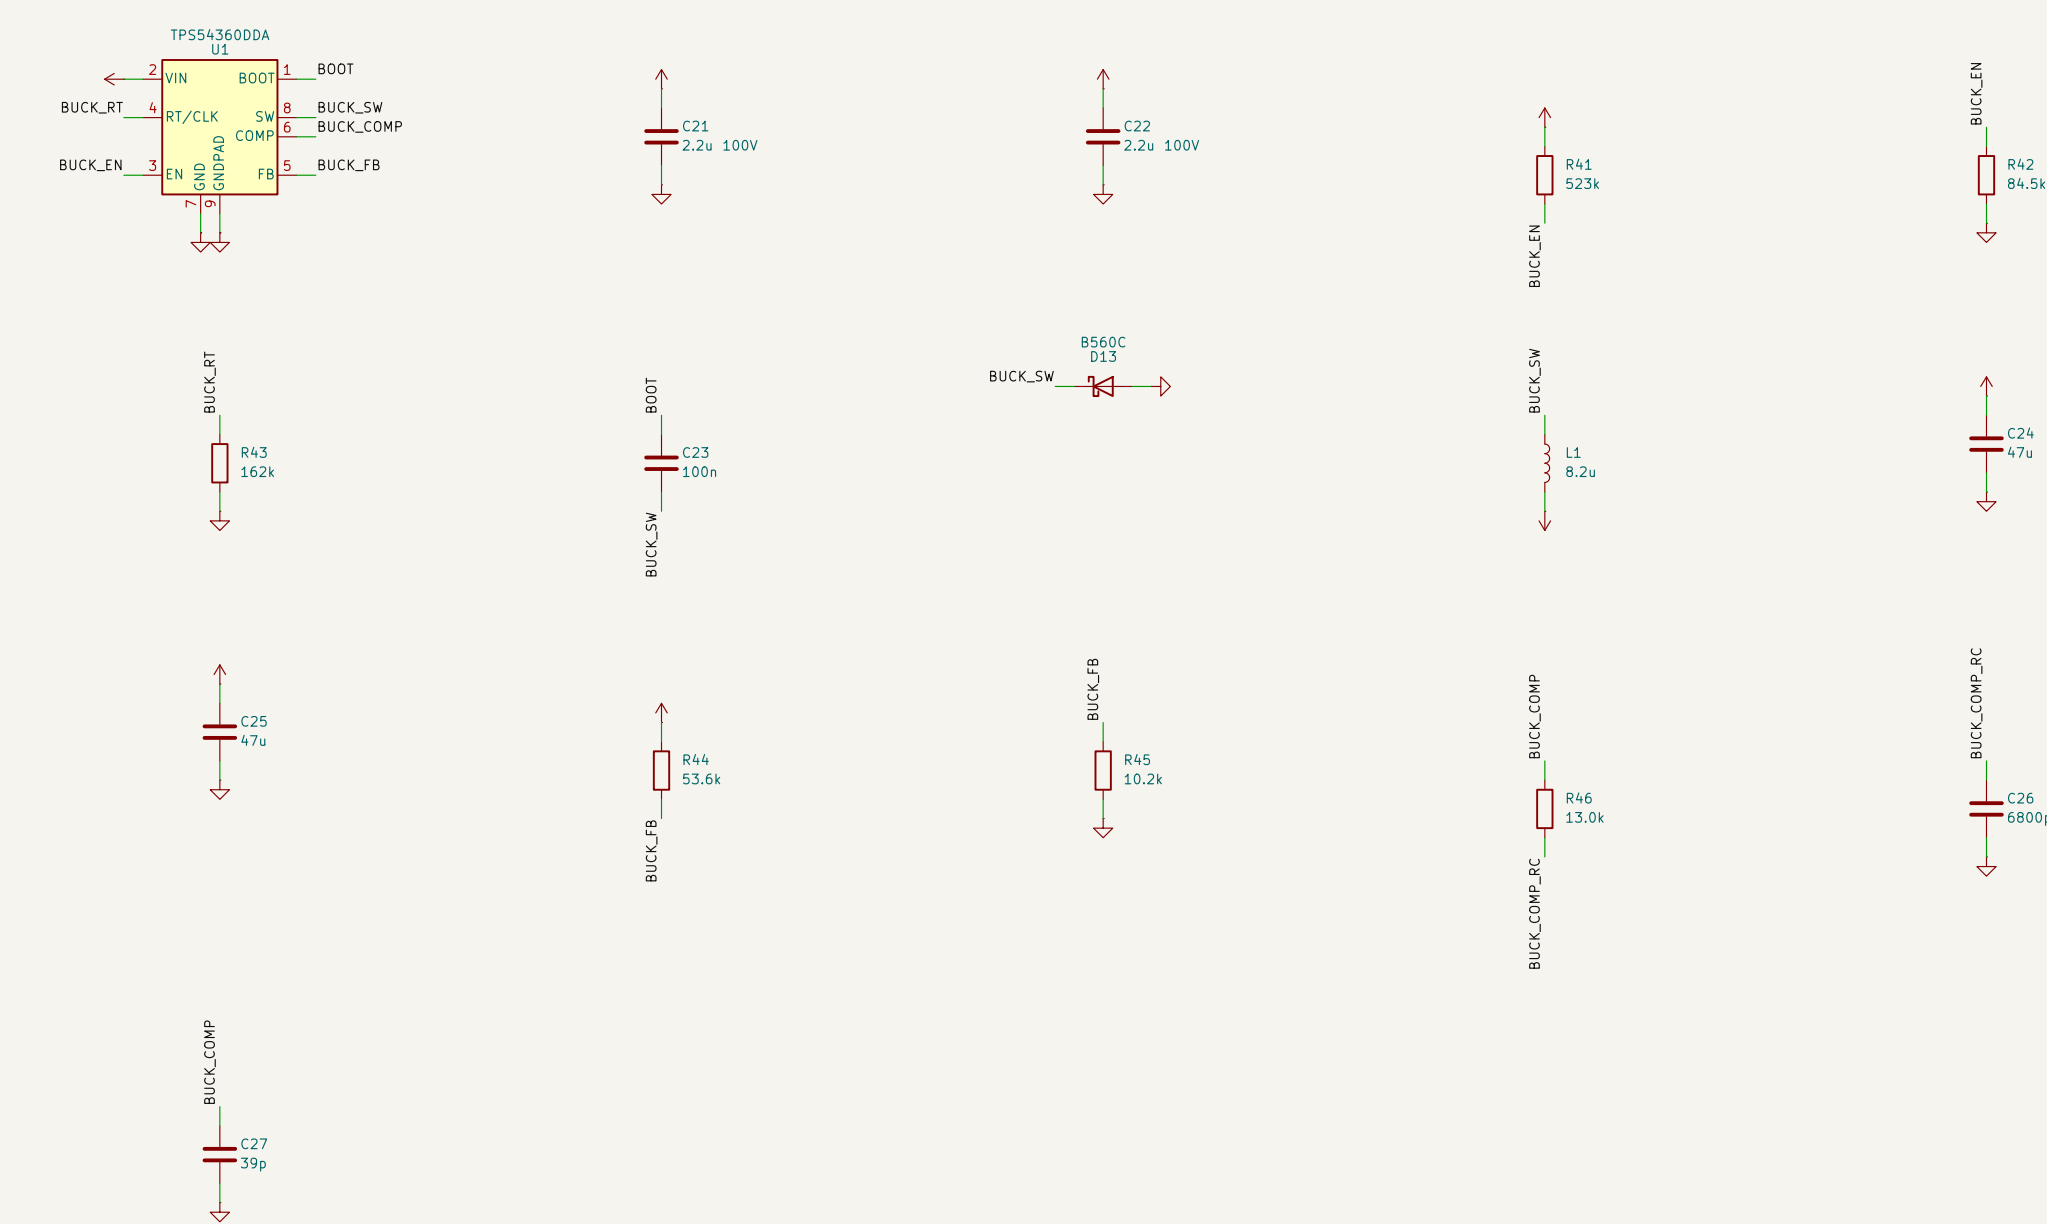


3.3 V, pod supply, LiDAR feed

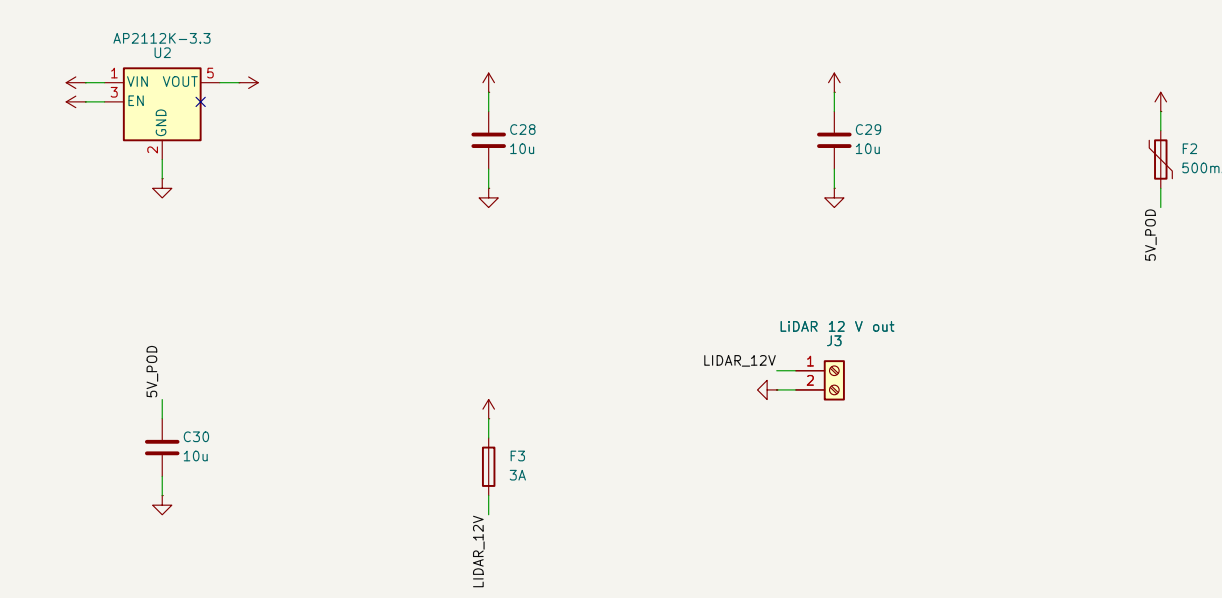


Brake actuator: buffer, BTS7960, current sense, cable magnet

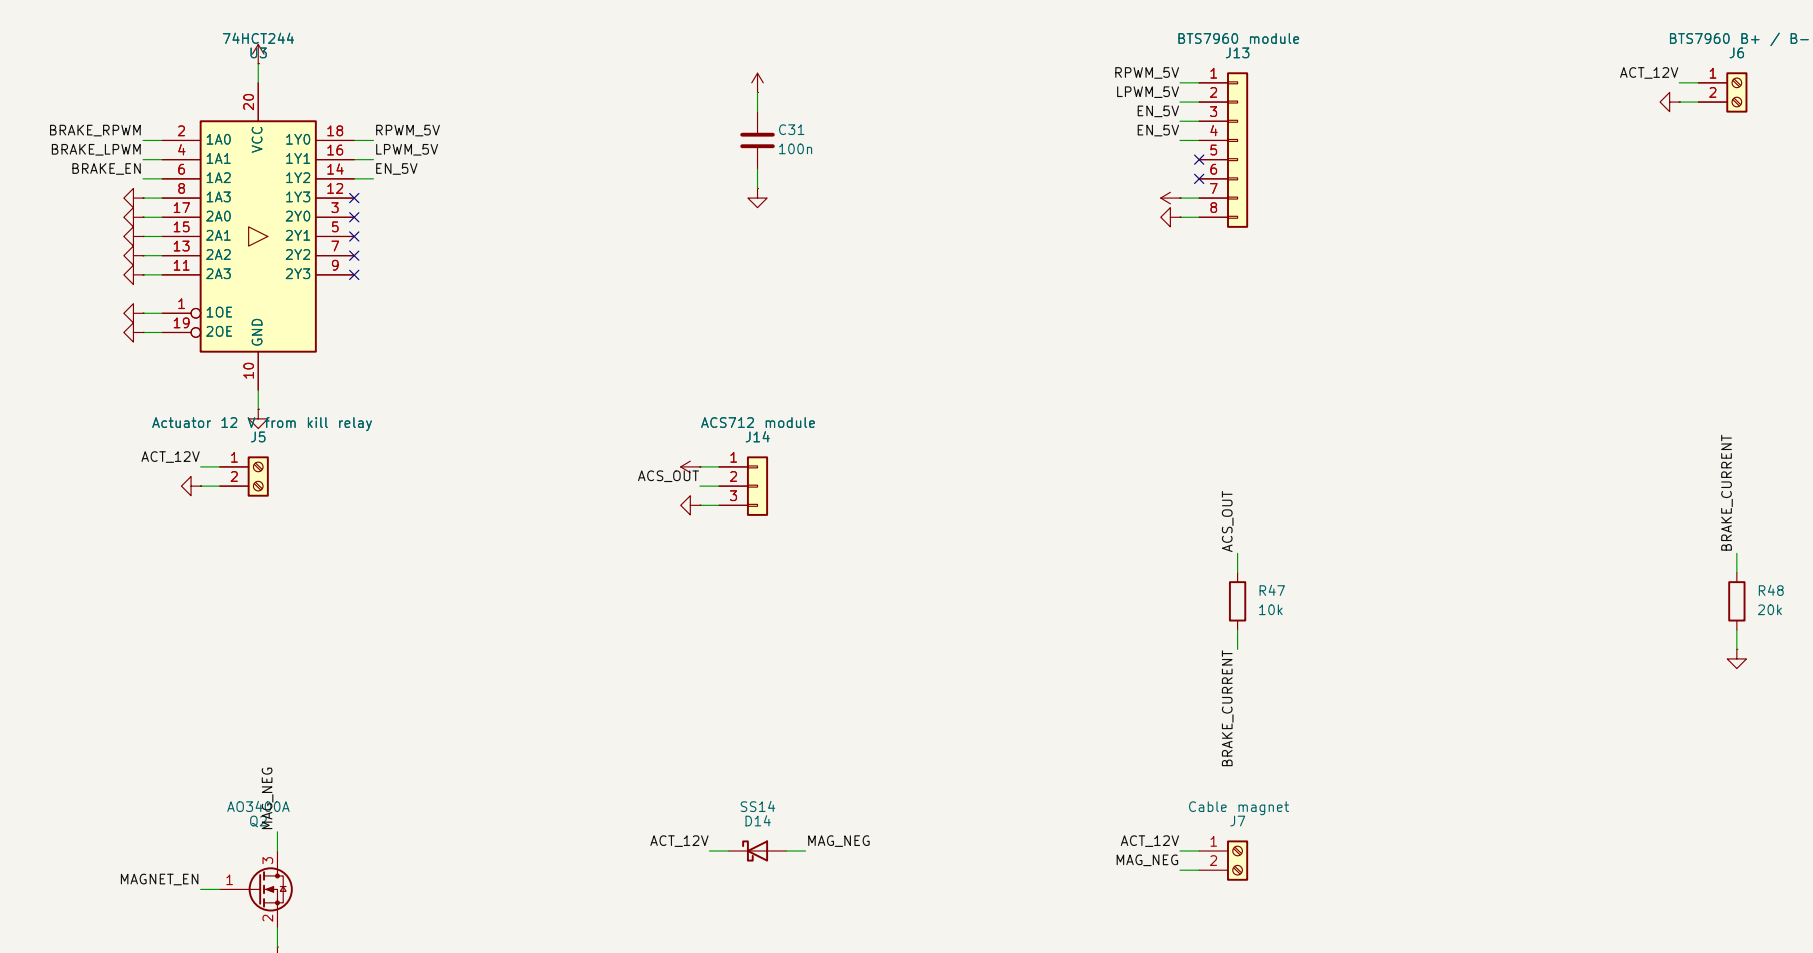


Signal relays (active-high, low-side MOSFETs)

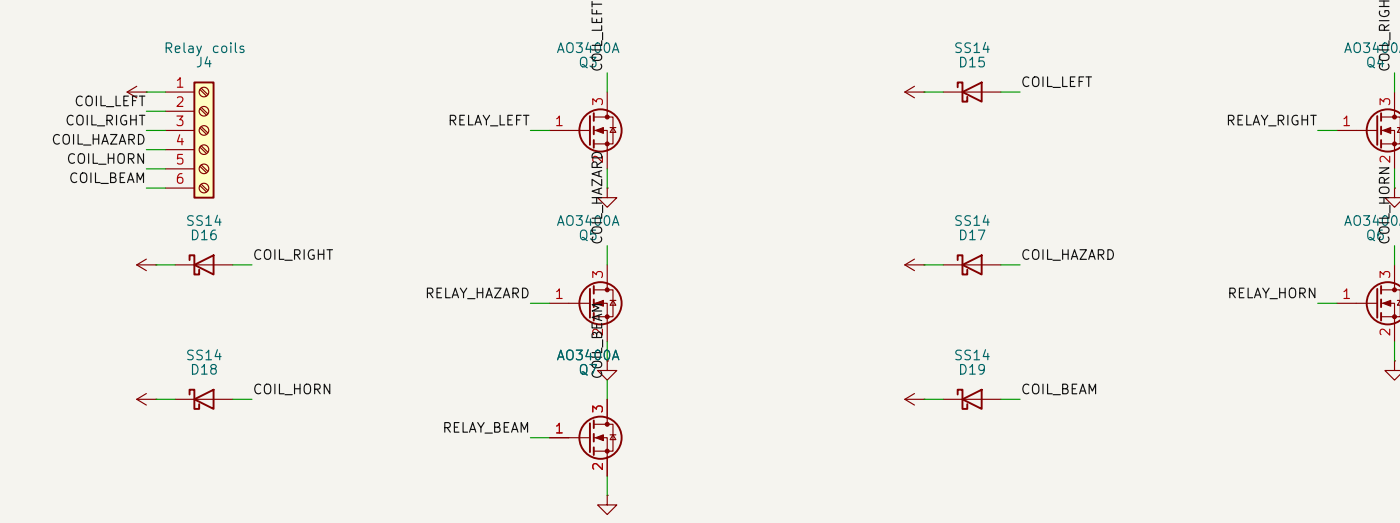


Fail-safe pull-downs (Part 4.8.4)

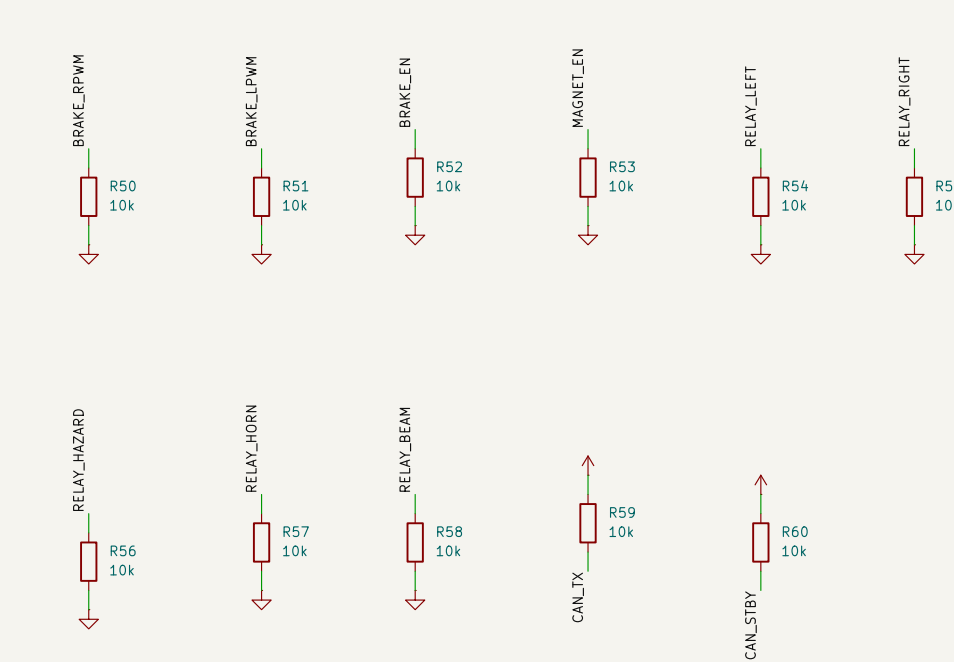

CAN transceiver, presence, brake light, E-stop, bench

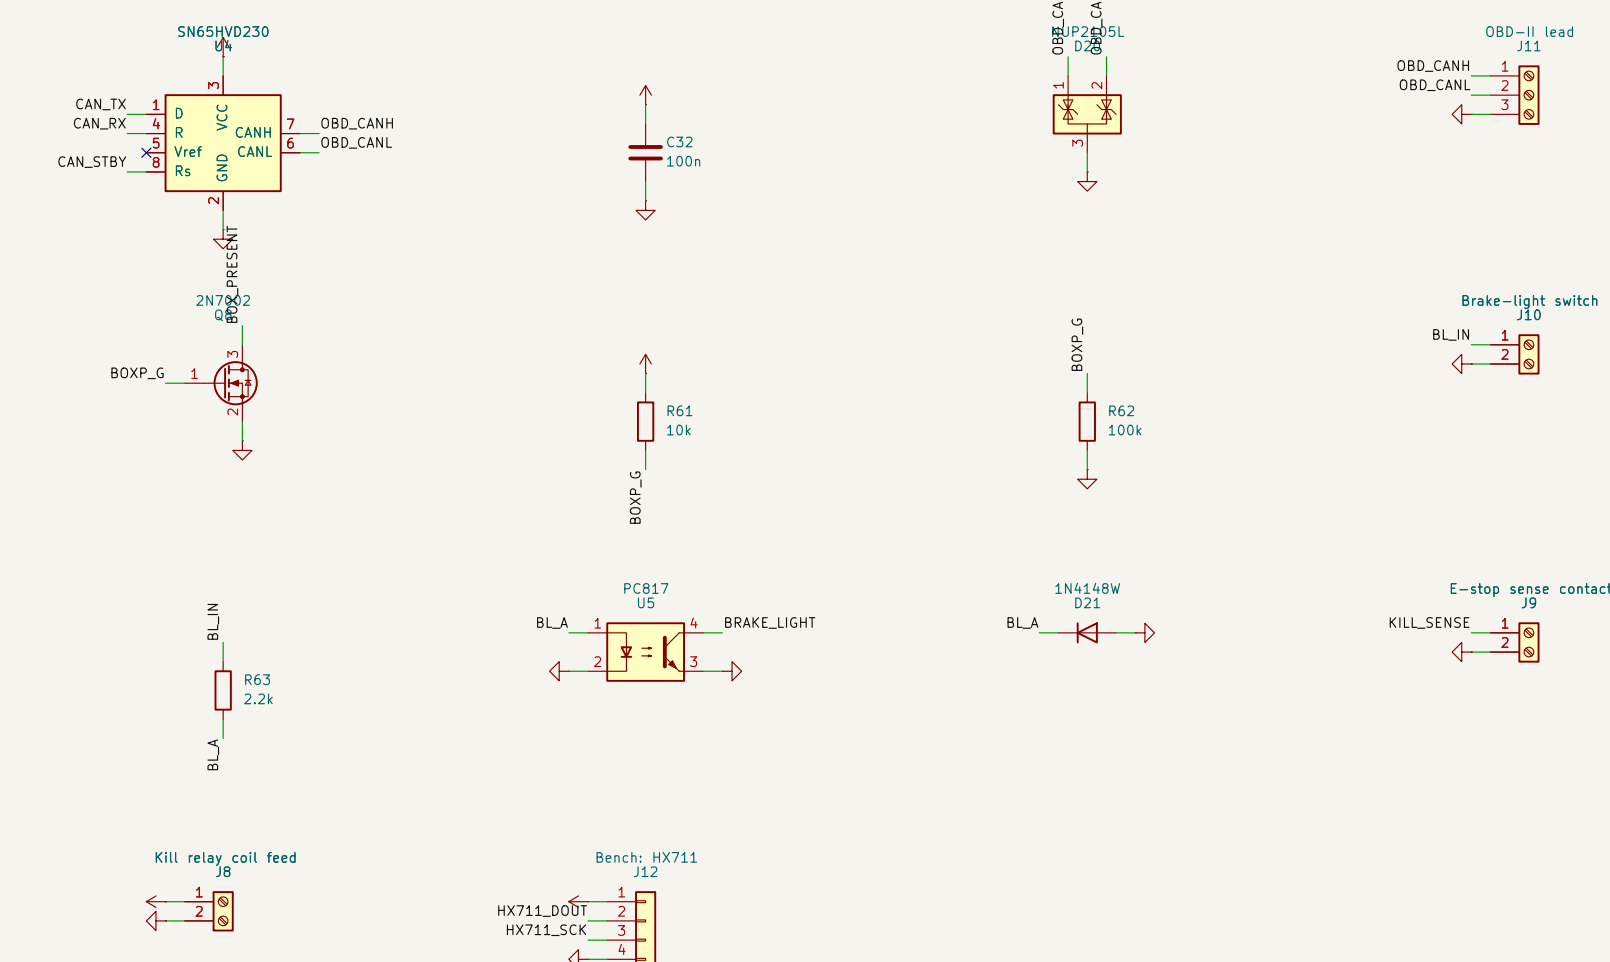

Inter-box cable (DB-25), BUILD_GUIDE 4.8.3

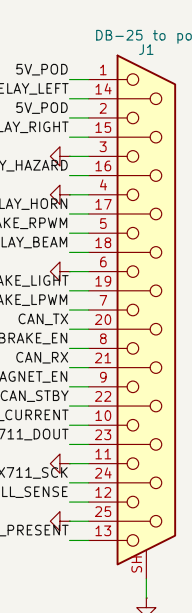

Mounting

