



FRONT / SECTION CONTEXT



RIGHT / LOAD PATH



ISOMETRIC / INTERFACE CONTEXT

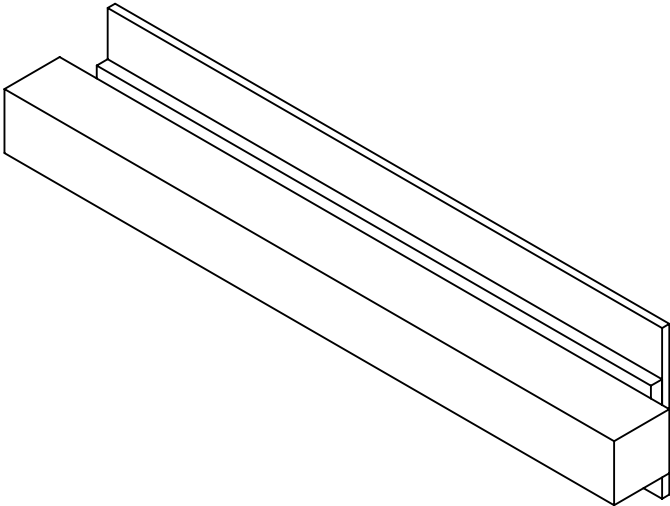


- 1. 2 x REAR STRAPS DISTRIBUTE BOX LOAD TO THE COMMON FRAME
- 2. M6 ENVELOPES ARE NOMINAL; REAR BOX HOLES AND WALL CAPACITY ARE PENDING
- 3. SECTION COUPON IS A REVIEW AID, NOT THE PURCHASED BOX HOLE TABLE

SOLAR PANEL / BACK RAIL / CLAMP / PIVOT CONNECTION


CAD-R0.8 | CONNECTION DETAIL REVIEW | NOT FOR MANUFACTURE

35 DEG PANEL WITH TRANSPARENT ENVELOPE AND SUPPORT CONTEXT


FRONT / SECTION CONTEXT



RIGHT / LOAD PATH

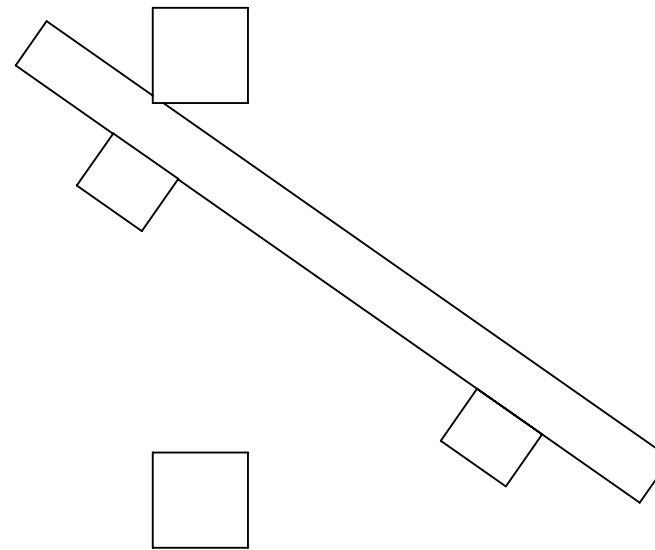


ISOMETRIC / INTERFACE CONTEXT

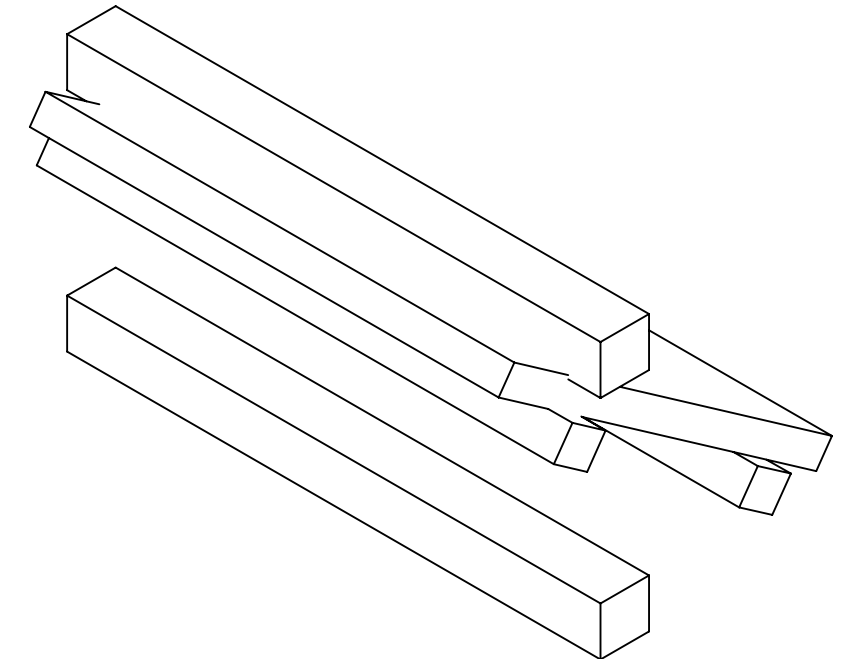


1. EDGE CLAMPS AVOID INVENTING PANEL FRAME HOLES BEFORE PHYSICAL SURVEY
2. BACK RAIL NORMAL OFFSET = 18.5 mm FROM PANEL MID-PLANE
3. CLAMP, PIVOT AND SWM-10W FRAME INTERFACES REMAIN SAMPLE-DEPENDENT


FRONT / SECTION CONTEXT

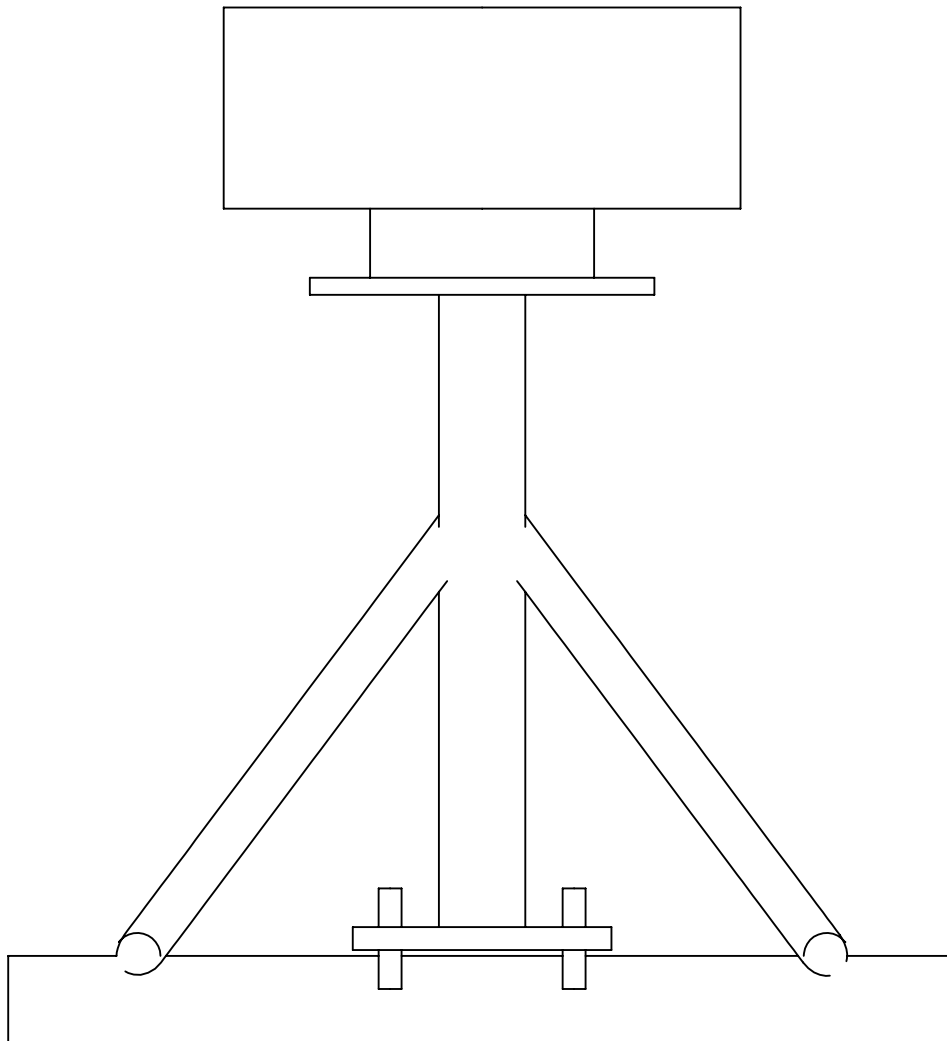

RIGHT / LOAD PATH

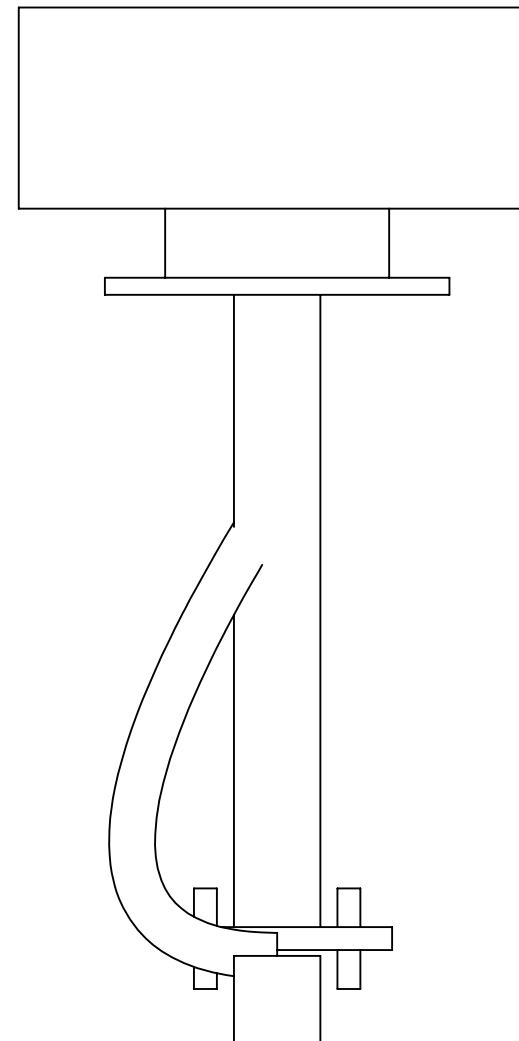

ISOMETRIC / INTERFACE CONTEXT

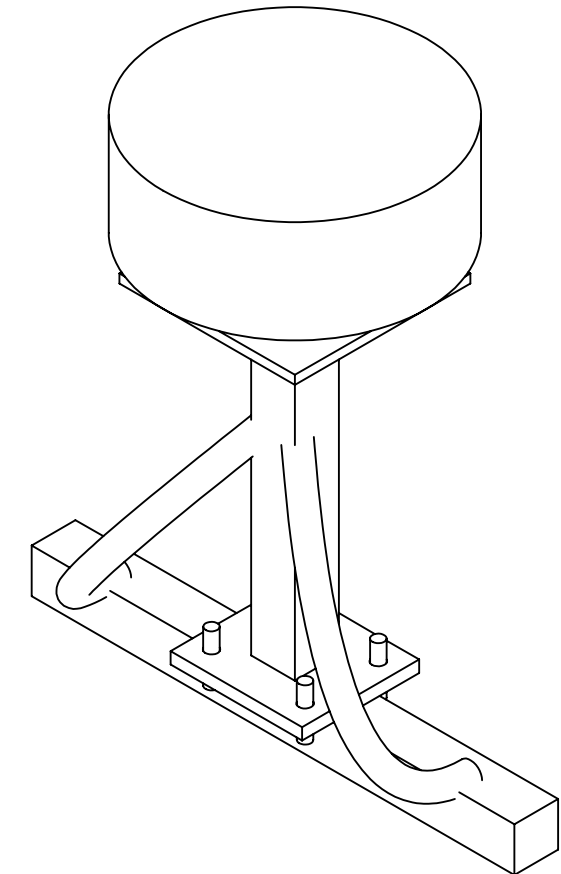


1. LEFT/RIGHT BRACES LIMIT MAST SWAY AND ANTENNA PHASE-CENTRE MOTION
2. 4 x DIA 8.5 IS A NOMINAL REVIEW PATTERN, NOT A RELEASED DRILL TABLE
3. BT-M87SF AND BT-760 DATUMS, LOADS AND FASTENER GRADES ARE PENDING

LOWER WALL / BULKHEAD / GLAND / DRIP-LOOP RETENTION


CAD-R0.8 | CONNECTION DETAIL REVIEW | NOT FOR MANUFACTURE

REAL ROUND SWEEPS PASS THROUGH FOUR NOMINAL CUT FEATURES


FRONT / SECTION CONTEXT

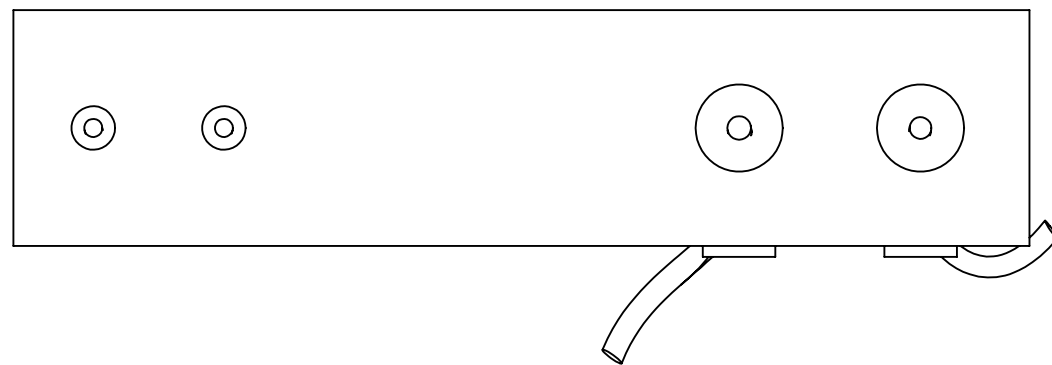

RIGHT / LOAD PATH

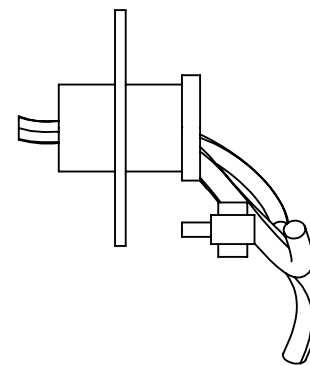

ISOMETRIC / INTERFACE CONTEXT

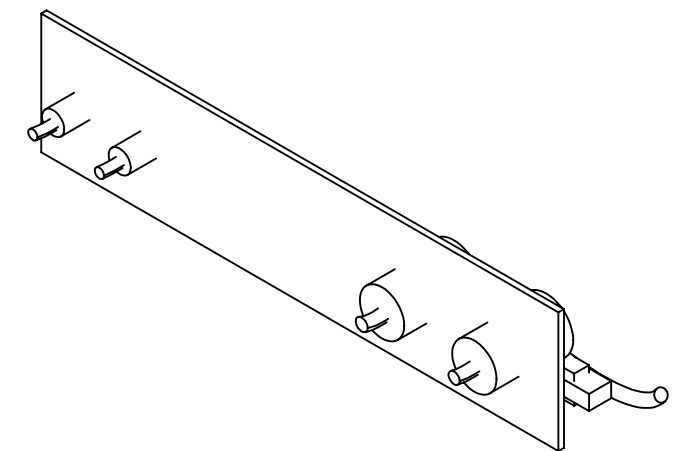

1. RF1/RF2 USE BULKHEAD BODIES; G2/G1 USE CABLE GLANDS
2. CABLES PASS THROUGH OPENINGS AND BEND OUTSIDE THE WALL - NOT INTO SOLID WALL
3. CUTOUTS, CABLE OD, CONNECTOR LENGTH, BEND RADIUS AND P-CLIPS REQUIRE SAMPLES